




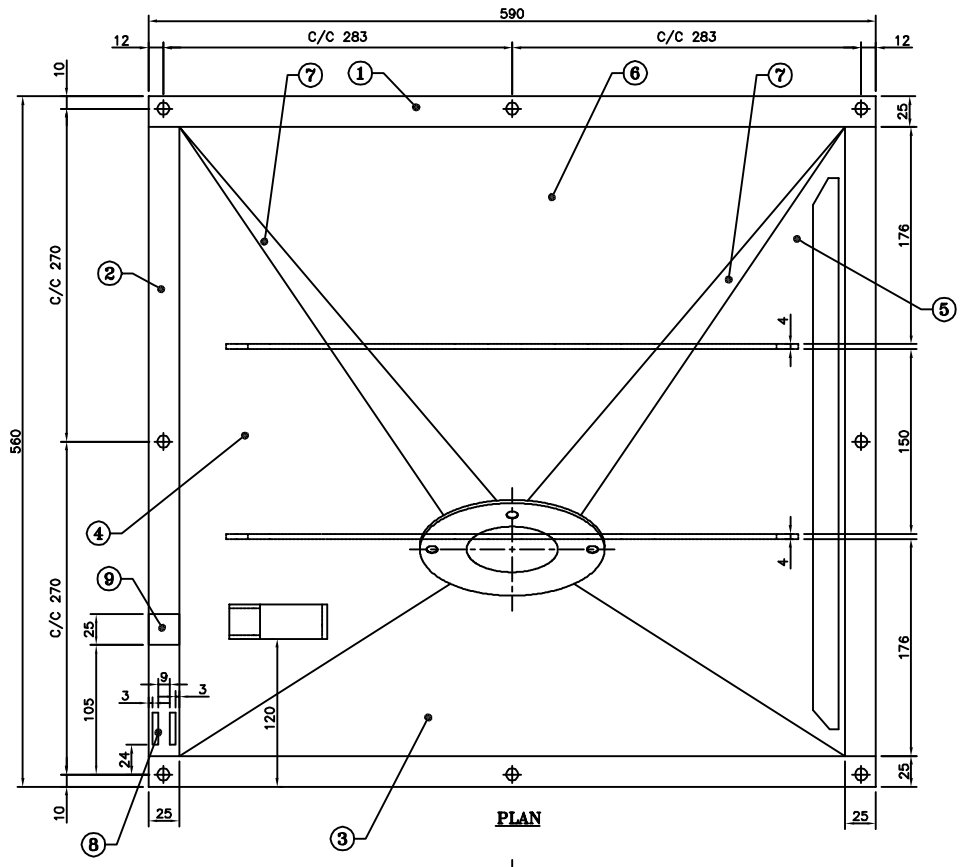


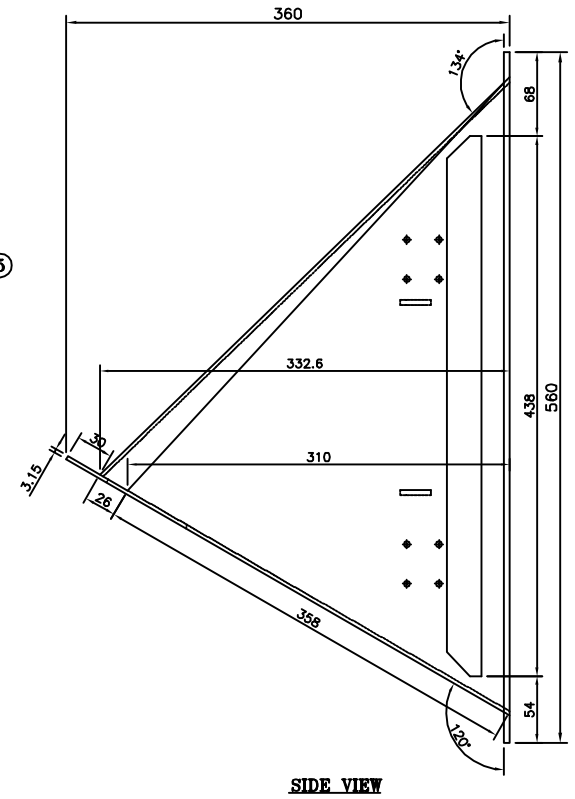





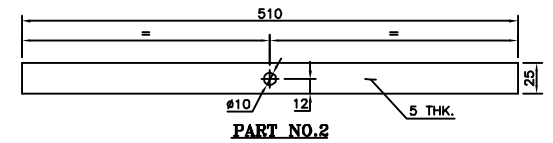


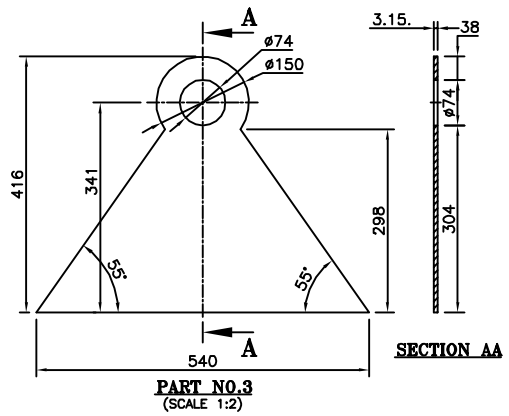


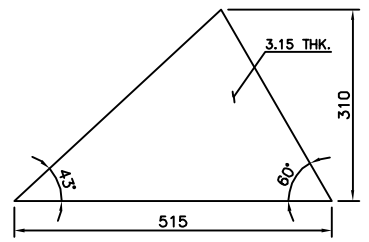


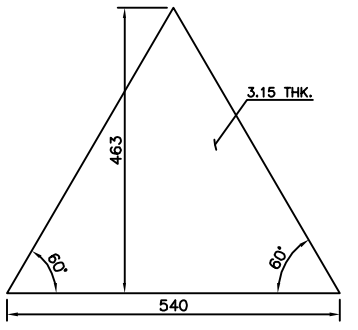











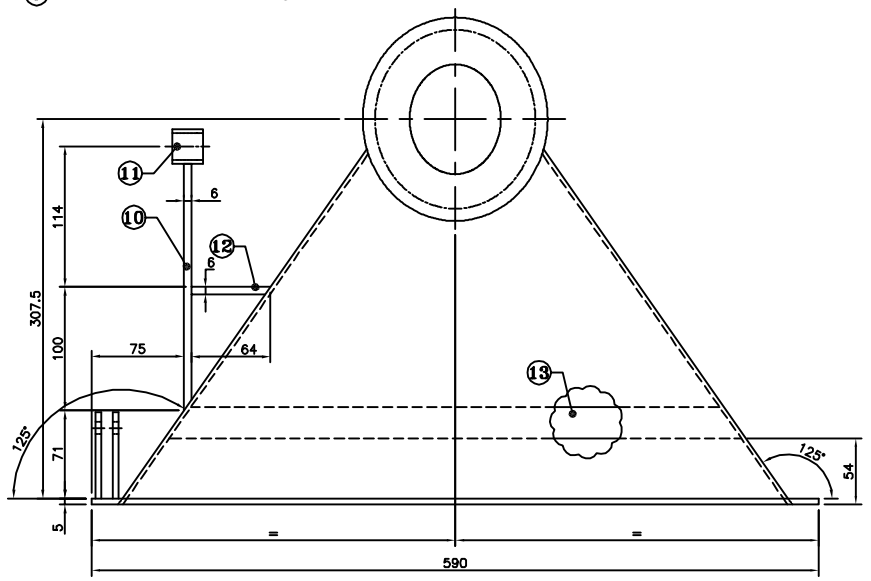


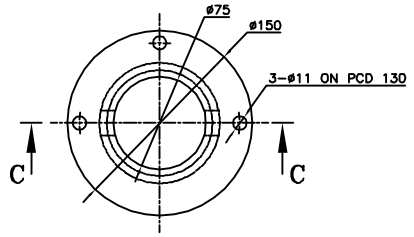








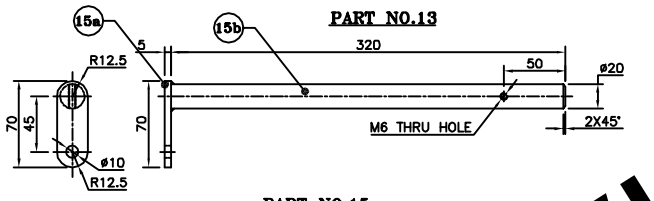


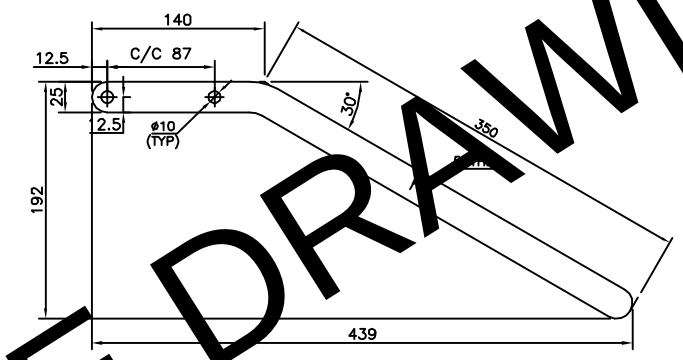


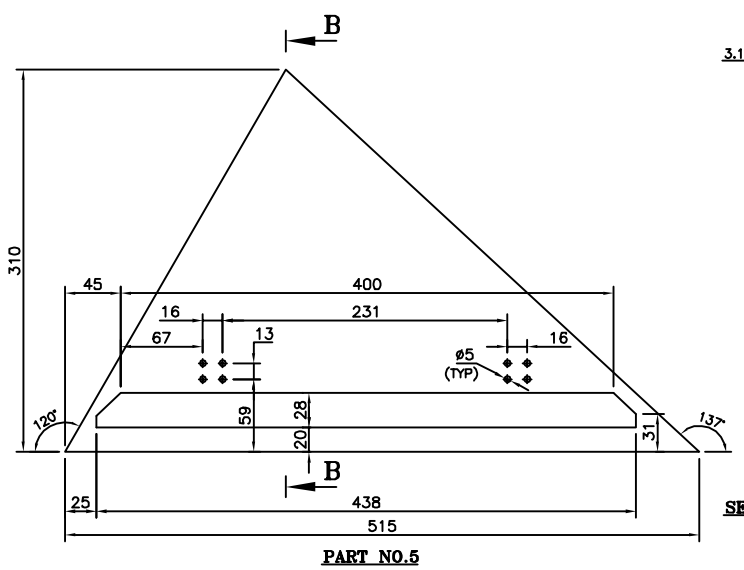


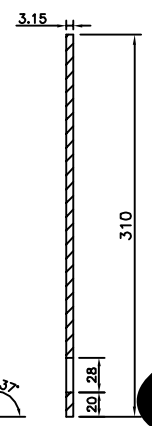

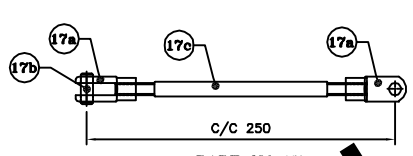







PART No.	DESCRIPTION	DRG. No./ SPECN.	MATERIAL SPECN.	QTY.	UNIT WEIGHT (Kg.)(APPROX.)	TOTAL	REMARKS/ CATALOGUE No.
17c.	SHOT LEVER SHAFT ø12 X 204 Lg.		STRL STEEL E250 B IS:2062-2006	1	0.20	0.20	
17b.	PIN ø9.8 X 25 Lg.		STRL STEEL E250 B IS:2062-2006	2	0.02	0.04	
17a.	PLATE 49 X 20 X 20		STRL STEEL E250 B IS:2062-2006	2	0.15	0.30	
16.	SHOT VALVE HANDLE 439 X 192 X 5 THK.		STRL STEEL E250 B IS:2062-2006	1	0.46	0.46	
15b.	SHOT VALVE AXLE ø20 X 320 Lg.		STRL STEEL E250 B IS:2062-2006	1	0.80	0.80	
15a.	PLATE 70 X 25 X 5 THK.		STRL STEEL E250 B IS:2062-2006	1	0.06	0.06	
14.	SHOT VALVE AXLE HOUSING OD 150 X ID 75 X 78 Lg.		STRL STEEL E250 B IS:2062-2006	1	8.11	8.11	
13.	PLATE 464 X 25 X 4 THK.		STRL STEEL E250 B IS:2062-2006	2	0.36	0.72	
12.	PLATE 64 X 28 X 6 THK.		STRL STEEL E250 B IS:2062-2006	1	0.09	0.09	
11.	PLATE OD 28 X ID 22 X 25 Lg.		STRL STEEL E250 B IS:2062-2006	1	0.05	0.05	
10.	PLATE 200 X 28 X [illegible] THK.		STRL STEEL E250 B IS:2062-2006	1	0.26	0.26	
[illegible]	PLATE [illegible] X 25 X [illegible] THK.		STRL STEEL E250 B IS:2062-2006	1	0.02	0.02	
[illegible]	PLATE 70 X 26 X 5 THK.		STRL STEEL E250 B IS:2062-2006	2	0.07	0.14	
7.	PLATE 445 X 128 X 3.15 THK.		STRL STEEL E250 B IS:2062-2006	1	0.25	0.25	
6.	PLATE 540 X 463 X 3.15 THK.		STRL STEEL E250 B IS:2062-2006	1	3.10	3.10	
5.	PLATE 515 X 310 X 3.15 THK.		STRL STEEL E250 B IS:2062-2006	1	1.70	1.70	
4.	PLATE 515 X 310 X 3.15 THK.		STRL STEEL E250 B IS:2062-2006	1	2.00	2.00	
3.	PLATE 540 X 416 X 3.15 THK.		STRL STEEL E250 B IS:2062-2006	1	2.80	2.80	
2.	PLATE 510 X 25 X 5 THK.		STRL STEEL E250 B IS:2062-2006	2	0.50	1.00	
1.	PLATE 590 X 25 X 5 THK.		STRL STEEL E250 B IS:2062-2006	2	0.57	1.15	

NOTES :-

1. ALL PARTS SHALL BE FREE FROM ALL KINDS OF DEFECTS.
2. WELDING SHALL BE FRE FROM ALL KINDS OF DEFECTS.
3. MATING SURFACES SHALL BE CLEANED BEFORE WELDING.
4. ALL SHARP EDGES TO BE SMOOTHLY ROUNDED OFF.
5. PART WAS OFFERED IN ASSEMBLED CONDITION.
6. REMOVE BURRS AFTER MACHINING.

TITLE : ABRASIVE STORAGE HOPPER

SAMPLE DRAWING