SIDERION

FORGED FOR MOTION

Product Catalog



GNSS & RTK Systems | GNSS Antennas | UAV Sensors

Electronic Speed Controllers | Flight Controllers | Drone Equipment

---

siderion.io

Foreword

When we established Siderion right out of Toulouse, France, our vision was to build high-precision navigation and drone electronics that autonomous systems can blindly trust.

We didn't want to just manufacture components; we wanted to create technology with passion, grounded in local expertise, ethical labor, and uncompromising standards.
No outsourcing, no shortcuts.

Motion demands absolute precision, whether it’s navigating a complex UAV, stabilizing a robotic platform, or pushing the limits of RTK GNSS tracking. That ethos is built into every product we design.

From our high-precision GNSS receivers (like the DP0601 and the triple-band ZED-F20P-powered lineup) to our ruggedized sensors, magnetometers (RM3100), and airspeed modules, our hardware is designed to perform seamlessly when it matters most and compatible with the ecosystems you already rely on, like PX4, ArduPilot, and Betaflight.

Inside this catalog, you’ll find the culmination of our work: professional-grade tools engineered for maximum reliability, extreme accuracy, and effortless integration.

Dive in, explore what we’ve forged, and let’s keep pushing the boundaries of autonomous motion together.

Siderion’s team - FORGED FOR MOTION

Contents

Foreword **2**
GNSS RTK Receivers **5**
DP0601 5
Sirius F9P 6
SP0700 7
SP0701 8
SP0702 9
SP0703 10
SP0704 11
Beacon F20P 12
Pioneer F20P 13
Standard GNSS Receivers **14**
Polaris F10N 14
GNSS Antennas **15**
SA233 15
SA275 16
SA435 17
ANN-MB 18
ANN-MB2 19
SA910 20
Sensors **21**
RM3100 21
MS4525 Airspeed 22
MS5525 Airspeed 23
SDP33 Airspeed 24
BMM350 25
VL53L1X 26
Product Description **27**

GNSS RTK Receivers

DP0601


SID-GNSS-RTK-DP0601

€149.90 *tax excl.*

Active

From **50** units: **€134.91** (10% off)
From **100** units: **€131.16** (12.5% off)
From **200** units: **€127.42** (15% off)
From **500** units: **€123.67** (17.5% off)

DP0601 ➜

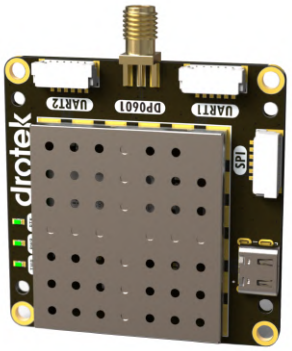

Main Features

- ☑ L1/L2 RTK based on the u-blox ZED-F9P
- ☑ SMA input connector (active GNSS antenna)
- ☑ USB-C & JST-GH interfaces
- ☑ Compatible with Pixhawk & ArduPilot
- ☑ Easy to integrate in any GNSS projects

Built around the proven u-blox ZED-F9P multi-band GNSS engine, the Siderion DP0601 offers fast RTK convergence and robust multi-constellation tracking to ensure precise positioning in complex environments. Equipped with standard JST-GH interfaces and native compatibility with ArduPilot and Pixhawk flight stacks, it provides a dependable, drop-in high-precision solution for modern robotics and UAV architectures.

Specification

GNSS Chip	U-blox ZED-F9P
GNSS Bands	L1/L2
GNSS modes	RTK, PPP
Antenna Input	Active Antenna

Interface

UART	2 (UART1 & UART2)
USB	1
SPI	1 (SPI or I2C)
I2C	1 (I2C or SPI)
PPS Out	1

Electrical Data

Voltage	5V
I/O Voltage	3.3V
Current	50mA to max 120mA

Mechanical Data

Size	50x50x7mm
Weight	17g
Temperature	-40°C to +70°C

Read the full datasheet here: DP0601

GNSS RTK Receivers

Sirius F9P

SID-GNSS-RTK-SIRIUS_F9P

€249.90 *tax excl.*

Active

From **50** units: **€224.91** (10% off)
From **100** units: **€218.66** (12.5% off)
From **200** units: **€212.42** (15% off)
From **500** units: **€206.17** (17.5% off)

Sirius F9P →



Main Features

- ☑ L1/L2 RTK based on the u-blox ZED-F9P
- ☑ Embedded L1/L2 Active Antenna
- ☑ USB-C & JST-GH interfaces
- ☑ **RM3100** professional-grade magnetometer
- ☑ Compatible with Pixhawk & ArduPilot

Engineered for applications where space and weight are critical, the Siderion SP0700 pairs the advanced u-blox ZED-F20P triple-band engine with an exceptionally small footprint. Designed with castellated edge holes matching standard 2.0mm pitch surface-mount footprints, it can be soldered directly onto host PCB boards for streamlined hardware integration to deliver rapid RTK convergence and sub-centimeter accuracy.

Specification

GNSS Chip	U-blox ZED-F9P
GNSS Bands	L1/L2
GNSS modes	RTK, PPP
Antenna	Embedded active Antenna
RM3100	Yes (1)

Interface

UART	2 (GPS & UART)
USB	1
I2C	1
PPS Out	1

Electrical Data

Voltage	5V
I/O Voltage	3.3V
Current	50mA to max 120mA

Mechanical Data

Size	74x74x22mm
Weight	100g
Temperature	-40°C to +70°C

Read the full datasheet here: SP0700

GNSS RTK Receivers

SP0700

SID-GNSS-RTK-SP0700_SMA
SID-GNSS-RTK-SP0700_UFL

€169.90 *tax excl.*

Active

From **50** units: **€152.91** (10% off)
From **100** units: **€148.66** (12.5% off)
From **200** units: **€144.42** (15% off)
From **500** units: **€140.17** (17.5% off)

SP0700 ➜



Main Features

- ☑ L1/L2/L5 RTK based on the u-blox ZED-F20P
- ☑ Compact form factor
- ☑ Castellated holes for module soldering
- ☑ “Zigbee-type" mounting
- ☑ u.FL or SMA GNSS input options

Engineered for applications where space and weight are critical, the Siderion SP0700 pairs the advanced u-blox ZED-F20P triple-band engine with an exceptionally small footprint. Designed with castellated edge holes matching standard 2.0mm pitch surface-mount footprints, it can be soldered directly onto host PCB boards for streamlined hardware integration to deliver rapid RTK convergence and sub-centimeter accuracy.

Specification

GNSS Chip	U-blox ZED-F20P
GNSS Bands	L1/L2/L5
GNSS modes	RTK, PPP-RTK, PPP
Antenna Input	Active Antenna

Interface

UART	2 (UART1 & UART2)
USB	1
SPI	1 (SPI or I2C)
I2C	1 (I2C or SPI)
PPS Out	1

Electrical Data

Voltage	3.3V
I/O Voltage	3.3V
Current	50mA to max 120mA

Mechanical Data

Size	28x24x6mm
Weight	6g
Temperature	-40°C to +70°C

Read the full datasheet here: SP0700

GNSS RTK Receivers

SP0701


SID-GNSS-RTK-SP0701

€179.90 *tax excl.*

Active

From **50** units: **€161.91** (10% off)
From **100** units: **€157.41** (12.5% off)
From **200** units: **€152.92** (15% off)
From **500** units: **€148.42** (17.5% off)

SP0701 ➜



Main Features

- ☑ L1/L2/L5 RTK based on the u-blox ZED-F20P
- ☑ SMA input connector (active GNSS antenna)
- ☑ USB-C & JST-GH interfaces
- ☑ Compatible with Pixhawk & ArduPilot
- ☑ Easy to integrate in any GNSS projects

The SP0701 is a high-performance RTK GNSS module powered by the u-blox ZED-F20P receiver. Successor to the best-selling “DP0601”, it delivers centimeter-level positioning accuracy for demanding autonomous systems. Designed with standard JST-GH interfaces and plug-and-play support for Pixhawk, ArduPilot, and Betaflight, it integrates effortlessly into UAVs, robotics, precision agriculture, and mapping platforms.

Specification

GNSS Chip	U-blox ZED-F20P
GNSS Bands	L1/L2/L5
GNSS modes	RTK, PPP-RTK, PPP
Antenna Input	Active Antenna

Interface

UART	2 (UART1 & UART2)
USB	1
SPI	1 (SPI or I2C)
I2C	1 (I2C or SPI)
PPS Out	1

Electrical Data

Voltage	5V
I/O Voltage	3.3V
Current	50mA to max 120mA

Mechanical Data

Size	50x50x7mm
Weight	17g
Temperature	-40°C to +70°C

Read the full datasheet here: SP0701

GNSS RTK Receivers

SP0702


SID-GNSS-RTK-SP0702

€179.90 *tax excl.*

Active

From **50** units: **€161.91** (10% off)
From **100** units: **€157.41** (12.5% off)
From **200** units: **€152.92** (15% off)
From **500** units: **€148.42** (17.5% off)

SP0702 ➜

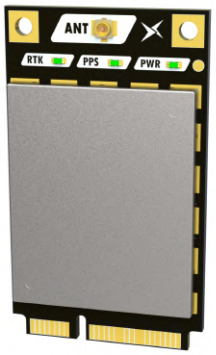

Main Features

- ☑ L1/L2/L5 RTK based on the u-blox ZED-F20P
- ☑ u.FL input connector (active GNSS antenna)
- ☑ mini PCIe interface.
- ☑ Easy to integrate in any GNSS projects

The SP0702 is a high-performance RTK GNSS module built into an industry-standard Mini PCIe form factor, powered by the u-blox ZED-F20P engine to deliver sub-centimeter positioning accuracy. By leveraging a standard mPCIe slot, it eliminates custom carrier board redesigns allowing engineers to instantly add high-precision navigation to industrial PCs, single-board computers, and flight controllers via a simple plug-and-play card.

Specification

GNSS Chip	U-blox ZED-F20P
GNSS Bands	L1/L2/L5
GNSS modes	RTK, PPP-RTK, PPP
Antenna Input	Active u.FL Antenna
Other	Mini PCI Express

Interface

UART	2 (UART1 & UART2)
USB	1
SPI	1 (SPI or I2C)
I2C	1 (I2C or SPI)
PPS Out	1

Electrical Data

Voltage	3.3V
I/O Voltage	3.3V
Current	50mA to max 120mA

Mechanical Data

Size	51x30x4.1mm
Weight	12g
Temperature	-40°C to +70°C

Read the full datasheet here: SP0702

GNSS RTK Receivers

SP0703

SID-GNSS-RTK-SP0703

€199.90 *tax excl.*

Active

From **50** units: **€179.91** (10% off)
From **100** units: **€174.91** (12.5% off)
From **200** units: **€169.92** (15% off)
From **500** units: **€164.92** (17.5% off)

SP0703 ➜



Main Features

- ☑ L1/L2/L5 RTK based on the u-blox ZED-F20P
- ☑ **RM3100** professional-grade magnetometer
- ☑ **BMP581** high precision pressure sensor
- ☑ USB-C & JST-GH interfaces
- ☑ Compatible with Pixhawk & ArduPilot

Engineered as a complete positioning and orientation solution, the Siderion SP0703 combines the u-blox ZED-F20P triple-band (L1/L2/L5) RTK engine with a magneto-inductive RM3100 magnetometer and a high-accuracy BMP581 barometer for precise vertical measurement. Featuring standard JST-GH connectors for native ArduPilot and Pixhawk integration, it delivers reliable position, heading, and altitude data in a single product.

Specification

GNSS Chip	U-blox ZED-F20P
GNSS Bands	L1/L2/L5
GNSS modes	RTK, PPP-RTK, PPP
Antenna Input	Active Antenna
RM3100	Yes (1)
BMP581	Yes (1)

Interface

UART	2 (UART1 & UART2)
USB	1
I2C	1
PPS Out	1

Electrical Data

Voltage	5V
I/O Voltage	3.3V
Current	50mA to max 130mA

Mechanical Data

Size	40x30x8mm
Weight	13g
Temperature	-40°C to +70°C

Read the full datasheet here: SP0703

GNSS RTK Receivers

SP0704


SID-GNSS-RTK-SP0704

€269.90 *tax excl.*

From **50** units: **€242.91** (10% off)
From **100** units: **€236.16** (12.5% off)
From **200** units: **€229.42** (15% off)
From **500** units: **€222.67** (17.5% off)

SP0704 ➜

Preview

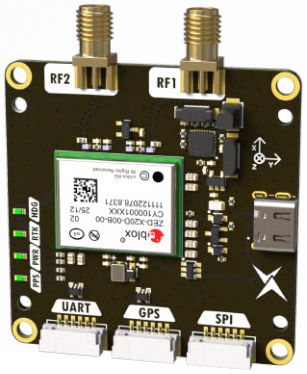

Main Features

- ☑ Heading with all-band GNSS on two antennas
- ☑ 0.1 degree (RMS) with a 1m baseline
- ☑ **RM3100** professional-grade magnetometer
- ☑ USB-C & JST-GH interfaces
- ☑ Compatible with Pixhawk & ArduPilot

Engineered as a complete positioning and orientation solution, the Siderion SP0704 combines the u-blox ZED-X20D all-band (L1/L2/L5/L6/L-band) heading & RTK engine with a magneto-inductive RM3100 magnetometer for high precision heading applications. Featuring a dual GNSS antenna input and standard JST-GH connectors for native ArduPilot and Pixhawk integration, it delivers reliable position and heading data in a single product.

Specification

GNSS Chip	U-blox ZED-X20D
GNSS Bands	L1/L2/L5/L6/L-band
GNSS modes	RTK, PPP-RTK, PPP
Antenna Input	Dual Active Antenna
RM3100	Yes (1)

Interface

UART	2 (UART1 & UART2)
USB	1
I2C	1
PPS Out	1

Electrical Data

Voltage	5V
I/O Voltage	3.3V
Current	50mA to max 150mA

Mechanical Data

Size	50x50x7mm
Weight	18g
Temperature	-40°C to +85°C

Read the full datasheet here: SP0704

GNSS RTK Receivers

Beacon F20P

SID-GNSS-RTK-Beacon_F20P

€209.90 *tax excl.*

Active

From **50** units: **€188.91** (10% off)
From **100** units: **€183.66** (12.5% off)
From **200** units: **€178.42** (15% off)
From **500** units: **€173.17** (17.5% off)

Beacon F20P →



Main Features

- ☑ L1/L2/L5 RTK based on the u-blox ZED-F20P
- ☑ **RM3100** professional-grade magnetometer
- ☑ **BMP581** high precision pressure sensor
- ☑ USB-C & JST-GH interfaces
- ☑ Compatible with Pixhawk & ArduPilot

Engineered as a complete positioning and orientation solution, the Siderion Beacon F20P combines the u-blox ZED-F20P triple-band (L1/L2/L5) RTK engine with a magneto-inductive RM3100 magnetometer and a high-accuracy BMP581 barometer for precise vertical measurement. Featuring standard JST-GH connectors for native ArduPilot and Pixhawk integration, it delivers reliable position, heading, and altitude data in a single product.

Specification

GNSS Chip	U-blox ZED-F20P
GNSS Bands	L1/L2/L5
GNSS modes	RTK, PPP-RTK, PPP
Antenna Input	Active Antenna
RM3100	Yes (1)
BMP581	Yes (1)

Interface

UART	2 (UART1 & UART2)
USB	1
I2C	1
PPS Out	1

Electrical Data

Voltage	5V
I/O Voltage	3.3V
Current	50mA to max 130mA

Mechanical Data

Size	63x33x13mm
Weight	20g
Temperature	-40°C to +70°C

Read the full datasheet here: Beacon F20P

GNSS RTK Receivers

Pioneer F20P

SID-GNSS-RTK-PIONEER_F20P

€209.90 *tax excl.*

Active

From **50** units: **€188.91** (10% off)
From **100** units: **€183.66** (12.5% off)
From **200** units: **€178.42** (15% off)
From **500** units: **€173.17** (17.5% off)

Pioneer F20P ➜



Main Features

- ☑ L1/L2/L5 RTK based on the u-blox ZED-F20P
- ☑ **RM3100** professional-grade magnetometer
- ☑ **BMP581** high precision pressure sensor
- ☑ USB-C & JST-GH interfaces
- ☑ Compatible with Pixhawk & ArduPilot

Engineered as a complete positioning and orientation solution, the Siderion Pioneer F20P combines the u-blox ZED-F20P triple-band (L1/L2/L5) RTK engine with a magneto-inductive RM3100 magnetometer and a high-accuracy BMP581 barometer for precise vertical measurement. Featuring standard JST-GH connectors for native ArduPilot and Pixhawk integration, it delivers reliable position, heading, and altitude data in a single product.

Specification

GNSS Chip	U-blox ZED-F20P
GNSS Bands	L1/L2/L5
GNSS modes	RTK, PPP-RTK, PPP
Antenna Input	Active Antenna
RM3100	Yes (1)
BMP581	Yes (1)

Interface

UART	2 (UART1 & UART2)
USB	1
I2C	1
PPS Out	1

Electrical Data

Voltage	5V
I/O Voltage	3.3V
Current	50mA to max 130mA

Mechanical Data

Size	43x33x13mm
Weight	17g
Temperature	-40°C to +70°C

Read the full datasheet here: Pioneer F20P

Standard GNSS Receivers

Polaris F10N

SID-GNSS-POLARIS_F10N

€89.90 *tax excl.*

Active

From **50** units: **€80.91** (10% off)
From **100** units: **€78.66** (12.5% off)
From **200** units: **€76.42** (15% off)
From **500** units: **€74.17** (17.5% off)

Polaris F10N →



Main Features

- ☑ L1/L5 RTK based on the u-blox ZED-F9P
- ☑ Embedded GNSS passive patch antenna
- ☑ **RM3100** professional-grade magnetometer
- ☑ **BMP581** high precision pressure sensor
- ☑ Compatible with Pixhawk & ArduPilot

Unlock unmatched accuracy with the Polaris F10N, a cutting-edge standard GNSS receiver powered by a RM3100 magnetometer and a BMP581 barometric sensor.
Based on the u-blox DAN-F10N, it is perfect for drones, robotics, and IoT, this module delivers accurate positioning, reliable heading, and precise altitude tracking. Compact, efficient, and built for performance, the Polaris F10N is the ultimate GPS to elevate your project.

Specification

GNSS Chip	U-blox DAN-F10N
GNSS Bands	L1/L5
Antenna	Embedded Passive Antenna
RM3100	Yes (1)
BMP581	Yes (1)

Interface

UART	1 (GPS)
I2C	1
PPS Out	1

Electrical Data

Voltage	5V
I/O Voltage	3.3V
Current	Max 50mA

Mechanical Data

Size	38x38x15mm
Weight	30g
Temperature	-40°C to +70°C

Read the full datasheet here: Polaris F10N

GNSS Antennas

SA233

SID-GNSS-ANT-SA233

€49.90 *tax excl.*

Active

From **50** units: **€44.91** (10% off)
From **100** units: **€43.66** (12.5% off)
From **200** units: **€42.42** (15% off)
From **500** units: **€41.17** (17.5% off)

SA233 ➜



Main Features

- ☑ L1/L2 GNSS helical active antenna
- ☑ Embedded GNSS passive patch antenna
- ☑ **RM3100** professional-grade magnetometer
- ☑ **BMP581** high precision pressure sensor
- ☑ Compatibility with Pixhawk & ArduPilot

The Siderion **SA233** is a high-performance helical multi-band active GNSS antenna designed for precision navigation and positioning applications.
The device allows concurrent reception of GPS /GLONASS / BeiDou & Galileo signals to improve signal availability. The minimum 2dBi peak gain is amplified using a 39dB LNA gain to ensure the best signal quality in any situation.

Specification

GNSS Bands	GPS: L1/L2
	GLONASS: G1/G2
	BDS: B1/B2/B3
	Galileo: E1/E5/E6
GNSS Gain	39dB
Antenna type	Helical active antenna

Interface

Connector	SMA (Male)
IP Rating	IP67

Electrical Data

Voltage	3V to 12V
Current	50mA max

Mechanical Data

Size	60x27.5mm
Weight	16g
Temperature	-40°C to +85°C

Read the full datasheet here: SA233

GNSS Antennas

SA275

SID-GNSS-ANT-SA275

€49.90 *tax excl.*

Active

From **50** units: **€44.91** (10% off)
From **100** units: **€43.66** (12.5% off)
From **200** units: **€42.42** (15% off)
From **500** units: **€41.17** (17.5% off)

SA275 ➜



Main Features

- ☑ L1/L5 RTK based on the u-blox ZED-F9P
- ☑ Embedded GNSS passive patch antenna
- ☑ **RM3100** professional-grade magnetometer
- ☑ **BMP581** high precision pressure sensor
- ☑ JST-GH for compatibility with Pixhawk & ArduPilot

The Siderion SA275 is a high-performance helical multi-band active GNSS antenna designed for precision navigation and positioning applications.
Leveraging multi-arm, multi-feed point technology, it supports L1, L2 & L5 signal reception across BeiDou, GPS, GLONASS and Galileo satellite systems. The minimum 2dBi peak gain is amplified using a 32dB LNA gain to ensure the best signal quality in any situation.

Specification

GNSS Bands	GPS: L1/L2/L5
	GLONASS: G1/G2
	BDS: B1/B2/B3
	Galileo: E1/E5/E6
GNSS Gain	32dB
Antenna type	Helical active antenna

Interface

Connector	SMA (Male)
IP Rating	IP67

Electrical Data

Voltage	3V to 6V
Current	45mA max

Mechanical Data

Size	54x27.8mm
Weight	16g
Temperature	-40°C to +85°C

Read the full datasheet here: SA275

GNSS Antennas

SA435

SID-GNSS-ANT-SA435

€54.90 *tax excl.*

Active

From **50** units: **€49.41** (10% off)
From **100** units: **€48.04** (12.5% off)
From **200** units: **€46.67** (15% off)
From **500** units: **€45.29** (17.5% off)

SA435 ➜



Main Features

- ☑ L1/L5 RTK based on the u-blox ZED-F9P
- ☑ Embedded GNSS passive patch antenna
- ☑ **RM3100** professional-grade magnetometer
- ☑ **BMP581** high precision pressure sensor
- ☑ JST-GH for compatibility with Pixhawk & ArduPilot

The Siderion SA435 is a high-performance helical multi-band active GNSS antenna designed for precision navigation and positioning applications.
Leveraging multi-arm, multi-feed point technology, it supports L1, L2 & L5 signal reception across BeiDou, GPS, GLONASS and Galileo satellite systems. The minimum 2dBi peak gain is amplified using a 35dB LNA gain to ensure the best signal quality in any situation.

Specification

GNSS Bands	GPS: L1/L2/L5
	GLONASS: G1/G2/G3
	BDS: B1/B2/B3
	Galileo: E1/E5/E6
GNSS Gain	35dB
Antenna type	Helical active antenna

Interface

Connector	SMA (Male)
IP Rating	IP67

Electrical Data

Voltage	3V to 6V
Current	45mA max

Mechanical Data

Size	43.5x40.8mm
Weight	32g
Temperature	-40°C to +85°C

Read the full datasheet here: SA435

GNSS Antennas

ANN-MB

SID-GNSS-ANT-ANN_MB

€49.90 *tax excl.*

Active

From **50** units: **€44.91** (10% off)
From **100** units: **€43.66** (12.5% off)
From **200** units: **€42.42** (15% off)
From **500** units: **€41.17** (17.5% off)

ANN-MB →

Main Features



- ☑ L1/L2 Dual-Feed active patch antenna
- ☑ High GNSS gain: 21dB
- ☑ Excellent price to performance ratio
- ☑ Compact and versatile
- ☑ 5m long cable

The u-blox ANN-MB multi-band (L1, L2/E5b/B2I) active GNSS antennas are designed to reduce time to market for the next generation of high precision GNSS applications, which require highly accurate location information. The compact design, excellent price to performance ratio, and versatile mounting and connector choices provide customers with fast, easy, and reliable multi-band antenna solutions. The ANN-MB antenna is a perfect match to the u-blox F9P based Siderion modules.

Specification

GNSS Bands	GPS: L1/L2
	GLONASS: G1/G2
	BDS: B1/B2
	Galileo: E1/E5
GNSS Gain	21dB
Antenna type	Dual-feed active patch antenna

Interface

Connector	SMA (Male)
Mounting	2xM4mm holes
Cable length	5m

Electrical Data

Voltage	3V to 5V
Current	15mA

Mechanical Data

Size	80x60x23mm
Weight	173g
Temperature	-40°C to +85°C

Read the full datasheet here: ANN-MB

GNSS Antennas

ANN-MB2

SID-GNSS-ANT-ANN_MB2

€69.90 *tax excl.*

Active

From **50** units: **€62.91** (10% off)
From **100** units: **€61.16** (12.5% off)
From **200** units: **€59.42** (15% off)
From **500** units: **€57.67** (17.5% off)

ANN-MB2 ➜



Main Features

- ☑ L1/L2/L5/L6/ Active patch antenna
- ☑ High GNSS gain: 31dB
- ☑ Excellent price to performance ratio
- ☑ Compact and versatile
- ☑ 5m long cable

The u-blox ANN-MB2 all-band (L1/L2/L5/E6/B3/L6/L-band) active GNSS antenna is designed to reduce time-to-market for modern wide-frequency, multi-constellation, high precision GNSS applications. Its robust design, excellent price-to-performance ratio, and flexible mounting options make ANN-MB2 an ideal choice for mass market applications requiring an all-band high precision GNSS antenna. ANN-MB2 is a perfect match to the u-blox triple-band F20 (e.g. ZED-D20P) and all-band X20 high precision platform (e.g. ZED-X20P).

Specification

GNSS Bands	GPS: L1/L2/L5/L6/L-band
	BDS: B1/B2/B3
	Galileo: E1/E6
GNSS Gain	31dB
Antenna type	Active patch antenna

Interface

Connector	SMA (Male)
Mounting	2xM4mm holes
Cable length	5m

Electrical Data

Voltage	3V to 5V
Current	15mA

Mechanical Data

Size	108.5x92.9x24.7mm
Weight	260g
Temperature	-40°C to +85°C

Read the full datasheet here: ANN-MB2

GNSS Antennas

SA910

SID-GNSS-ANT-SA910

€99.90 *tax excl.*

Active

From **50** units: **€89.91** (10% off)
From **100** units: **€87.41** (12.5% off)
From **200** units: **€84.92** (15% off)
From **500** units: **€82.42** (17.5% off)

SA910 ➜



Main Features

- ☑ L1/L2/L5 Active surveying antenna
- ☑ High GNSS gain: 40dB
- ☑ Excellent price to performance ratio
- ☑ Magnetic pod
- ☑ Water and weather proof (IP67)

The SA910 is an affordable and highly efficient multi-band GNSS active antenna and allows concurrent reception of GPS/GLONASS/BeiDou & Galileo signals to improve signal availability. The minimum 5dBi peak gain is amplified using a 40dB LNA gain to ensure the best signal quality in any situation. Its magnetic pod makes it an ideal choice to be easily attached to larger vehicles such as tractors and heavy machines. The SA910 antenna is also the best choice for RTK GNSS surveing bases.

Specification

GNSS Bands	GPS: L1/L2/L5
	GLONASS: G1/G2/G3
	BDS: B1/B2/B3
	Galileo: E1/E2/E5/E6
GNSS Gain	40dB
Antenna type	Active antenna

Interface

Connector	TNC-K
IP rating	IP67
Cable length	1m long TNC to SMA

Electrical Data

Voltage	3V to 12V
Current	50mA max

Mechanical Data

Size	151.5x66.5mm
Weight	16g
Temperature	-40°C to +85°C

Read the full datasheet here: SA910

Sensors

RM3100

SID-SENS-RM3100

€42.90 *tax excl.*

Active

From **50** units: **€38.61** (10% off)
From **100** units: **€37.54** (12.5% off)
From **200** units: **€36.47** (15% off)
From **500** units: **€35.39** (17.5% off)

RM3100 ➜



Main Features

- ☑ Most popular RM3100 module on the market
- ☑ Low power consumption <5mA
- ☑ High-resolution (13nT)
- ☑ Compatible with Pixhawk & ArduPilot

Achieve unmatched heading precision with the professional-grade **RM3100** magnetometer. Ultra-low power, compact size, and an extensive dynamic range.

Ideal for UAVs, drones, robotics, and precision farming.

Specification

Sensor chip	PNI RM3100
Resolution	13nT @200 Cycle Counts
Mag range	±800µT

Interface

SPI	1 (1Mhz)
I2C	1 (1MHz)

Electrical Data

Voltage	5V
I/O Voltage	3.3V
Current	10mA max

Mechanical Data

Size	33x26x10mm
Weight	7g
Temperature	-40°C to +70°C

Read the full datasheet here: RM3100

Sensors

MS4525 Airspeed

SID-SENS-MS4525

€39.90 *tax excl.*

Active

From **50** units: **€35.91** (10% off)
From **100** units: **€34.91** (12.5% off)
From **200** units: **€33.92** (15% off)
From **500** units: **€32.92** (17.5% off)

MS4525 ➜



Main Features

- ☑ High-Accuracy (14 bit ADC)
- ☑ Differential inputs, ideal for Pitot tubes
- ☑ ±1 PSI pressure range (Max speed: 350Km/h)
- ☑ Compatible with Pixhawk & ArduPilot

Achieve outstanding airspeed accuracy with the MS4525 Airspeed.
A small, differential, high-performance pressure sensor based on the TE MS4525DO.

Ideal for unmanned aerial vehicles, drones, fixed-wings, robotics.

Specification

Sensor chip	TE MS4525DO
Resolution	14bit ADC
Pressure range	±1 PSI (Max speed: 350Km/h)

Interface

I2C	1 (400KHz)
Input	1 differential input

Electrical Data

Voltage	5V
I/O Voltage	3.3V
Current	3mA max

Mechanical Data

Size	33x26x15mm
Weight	8g
Temperature	-40°C to +70°C

Read the full datasheet here: MS4525 Airspeed

Sensors

MS5525 Airspeed

SID-SENS-MS5525

€44.90 *tax excl.*

Active

From **50** units: **€40.41** (10% off)
From **100** units: **€39.29** (12.5% off)
From **200** units: **€38.17** (15% off)
From **500** units: **€37.04** (17.5% off)

MS5525 ➜



Main Features

- ☑ High-Accuracy (24 bit ADC)
- ☑ Differential inputs, ideal for Pitot tubes
- ☑ ±1 PSI pressure range (Max speed: 350Km/h)
- ☑ Compatible with Pixhawk & ArduPilot

Achieve outstanding airspeed accuracy with the MS5525 Airspeed.
A small, differential, high-performance pressure sensor based on the TE MS5525DSO.

Ideal for unmanned aerial vehicles, drones, fixed-wings, robotics.

Specification

Sensor chip	TE MS5525DSO
Resolution	24bit ADC
Pressure range	±1 PSI (Max speed: 350Km/h)

Interface

SPI	1 (2MHz)
I2C	1 (400KHz)
Input	1 differential input

Electrical Data

Voltage	5V
I/O Voltage	3.3V
Current	2mA max

Mechanical Data

Size	33x26x10mm
Weight	7g
Temperature	-40°C to +70°C

Read the full datasheet here: MS5525 Airspeed

Sensors

SDP33 Airspeed

SID-SENS-SDP33

€44.90 *tax excl.*

Active

From **50** units: **€40.41** (10% off)
From **100** units: **€39.29** (12.5% off)
From **200** units: **€38.17** (15% off)
From **500** units: **€37.04** (17.5% off)

SDP33 ➜



Main Features

- ☑ High-Accuracy (16 bit ADC)
- ☑ Differential inputs, ideal for Pitot tubes
- ☑ ±1500Pa pressure range (Max speed: 180Km/h)
- ☑ Compatible with Pixhawk & ArduPilot

Achieve outstanding airspeed accuracy with the SDP33 Airspeed.
A tiny form factor, differential, high-performance pressure sensor based on the Sensirion SDP33.

Ideal for unmanned aerial vehicles, drones, fixed-wings, robotics.

Specification

Sensor chip	Sensirion SDP33
Resolution	16bit ADC
Pressure range	±1500Pa

Interface

I2C	1 (400KHz)
Input	1 differential input
Other	No calibration needed

Electrical Data

Voltage	5V
I/O Voltage	3.3V
Current	Max 50mA

Mechanical Data

Size	26x17x8mm
Weight	4g
Temperature	-40°C to +70°C

Read the full datasheet here: SDP33 Airspeed

Sensors

BMM350

SID-SENS-BMM350

€14.90 *tax excl.*

Active

From **50** units: **€13.41** (10% off)
From **100** units: **€13.04** (12.5% off)
From **200** units: **€12.67** (15% off)
From **500** units: **€12.29** (17.5% off)

BMM350 ➜



Main Features

- ☑ Magnetic sensor based on Bosch's BMM350
- ☑ Low power consumption (200µA @100Hz)
- ☑ Wide magnetic field range (±2000 µT on all axis)
- ☑ Minuscule footprint & weight (26x17x8mm / 4g)
- ☑ Compatible with Pixhawk & ArduPilot

The BMM350 is Bosch's next-generation 3-axis geomagnetic sensor, designed to give microcontrollers precise compass heading and dead-reckoning support. Whether you're equipping an autonomous drone with reliable heading tracking, building head-tracking hardware for VR/AR, or adding indoor navigation to a wearable, the BMM350 handles stray magnetic interference effortlessly thanks to its built-in field-shock reset features.

Specification

Sensor chip	Bosch Sensortech BMM350
Resolution	~100nT
Magnetic range	±2000 µT for X, Y, and Z axes

Interface

I2C	1 (1MHz)

Electrical Data

Voltage	5V
I/O Voltage	3.3V
Current	Max 3.5mA

Mechanical Data

Size	26x17x8mm
Weight	4g
Temperature	-40°C to +70°C

Read the full datasheet here: BMM350

Sensors

VL53L1X

SID-SENS-VL53L1X

€14.90 *tax excl.*

Active

From **50** units: **€13.41** (10% off)
From **100** units: **€13.04** (12.5% off)
From **200** units: **€12.67** (15% off)
From **500** units: **€12.29** (17.5% off)

VL53L1X ➜



Main Features

- ☑ Time-of-Flight IR Sensor based on ST's VL53L1X
- ☑ Distance up to 400cm
- ☑ Infrared protective cover
- ☑ Minuscule footprint & weight (26x17x8mm / 4g)
- ☑ Compatible with Pixhawk & ArduPilot

The ST VL53L1X Time-of-Flight range sensor powered by STMicroelectronics, is a micro-laser module that accurately measures distances up to 400 cm (13 feet) at speeds up to 50 Hz. Unlike traditional infrared sensors that estimate distance based on reflected light intensity, the VL53L1X measures the exact time it takes for photons to bounce back, ensuring target color, reflectivity, and surface texture don't distort your readings.

Specification

Sensor chip	VL53L1X
Field of View	15 to 27°
Distance	Up to 400cm
Sampling frequency	up to 50Hz

Interface

I2C	1 (400KHz)

Electrical Data

Voltage	5V
I/O Voltage	3.3V
Current	Max 20mA


Mechanical Data

Size	26x17x8mm
Weight	4g
Temperature	-40°C to +70°C

Read the full datasheet here: VL53L1X

Product Description


DP0601

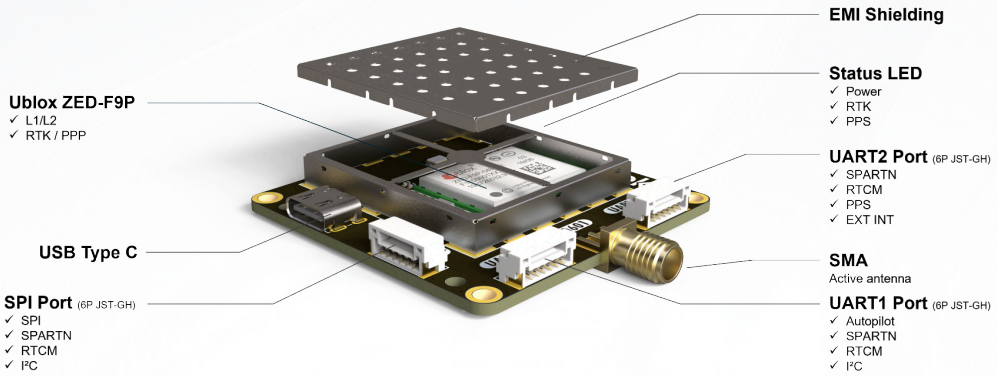


Sirius F9P




SP0700

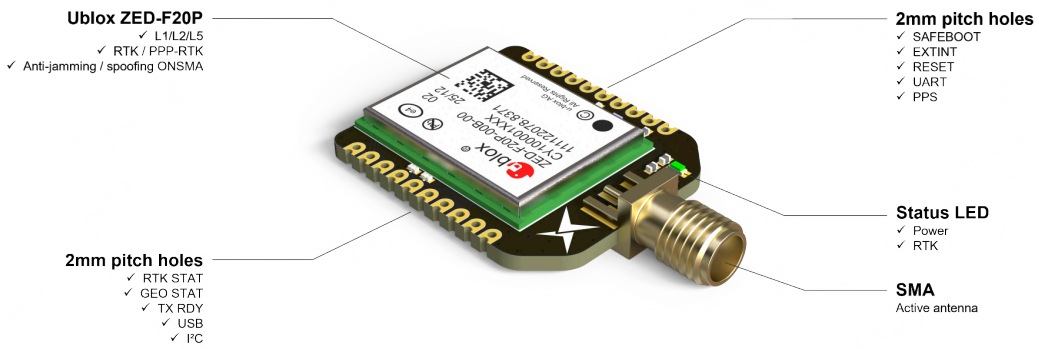


SP0701

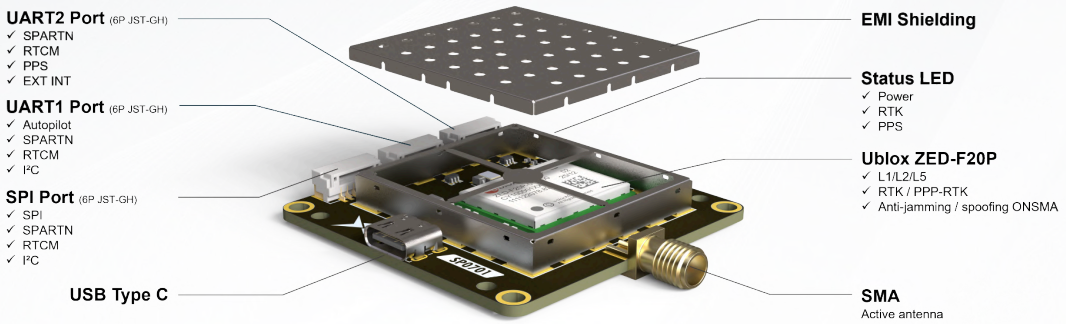


SP0702

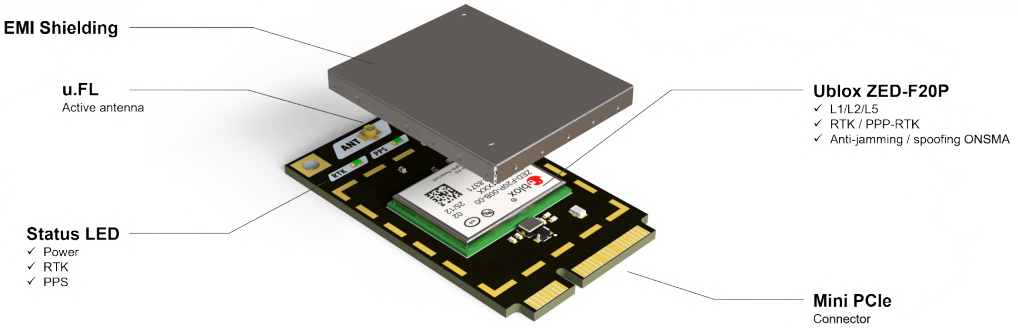


SP0703

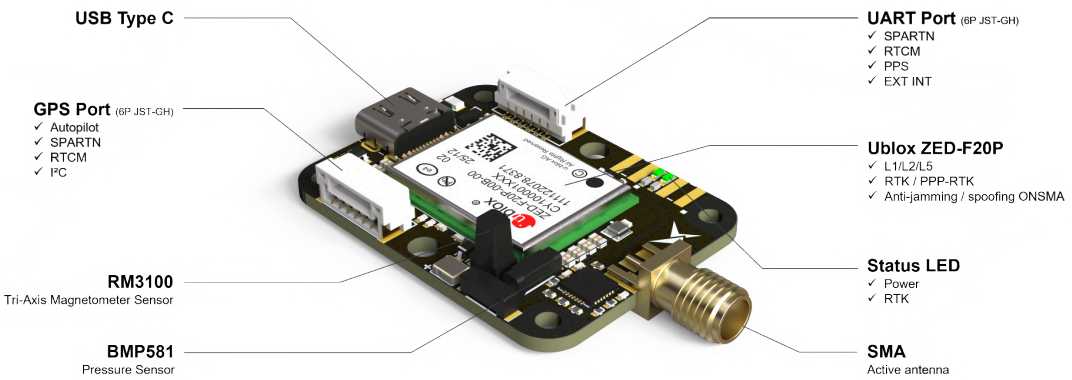


Beacon F20P

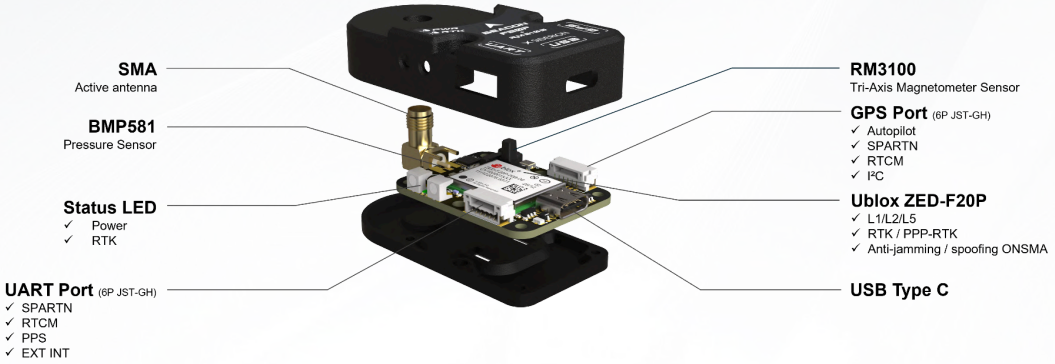


Pioneer F20P

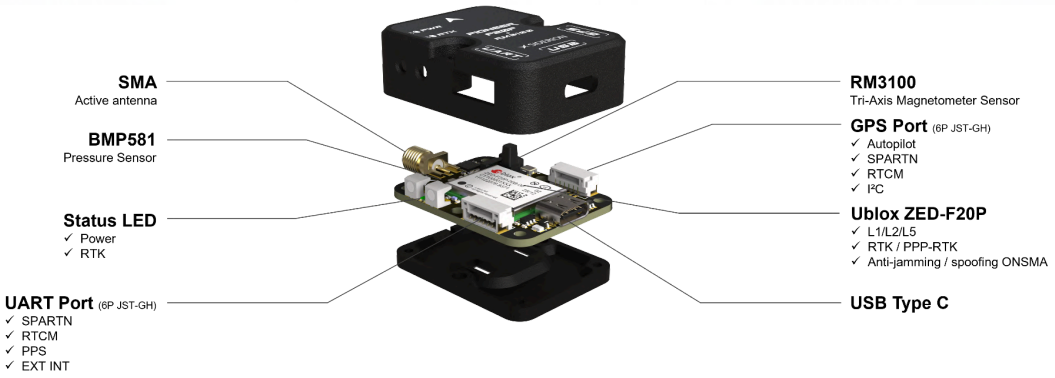


Polaris F10N

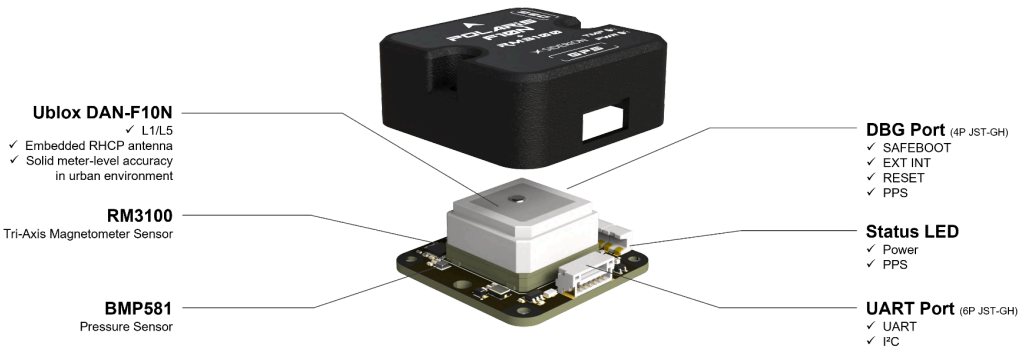


RM3100

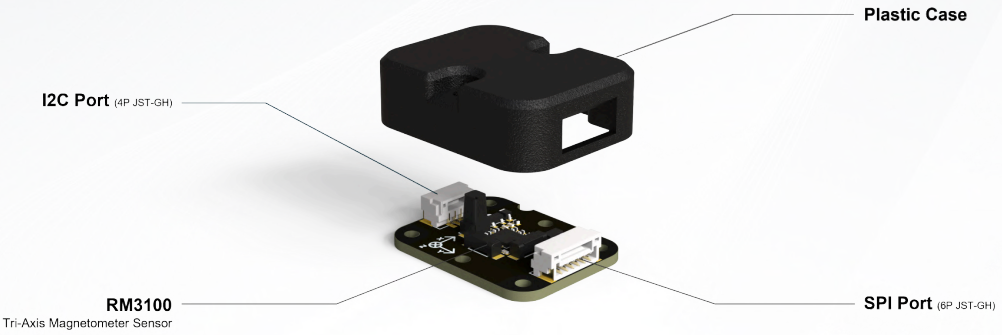

Pioneer F20P

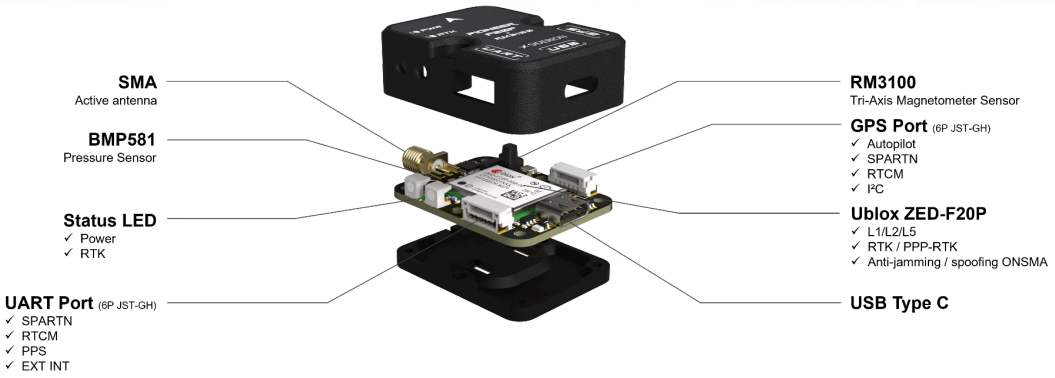

Pioneer F20P

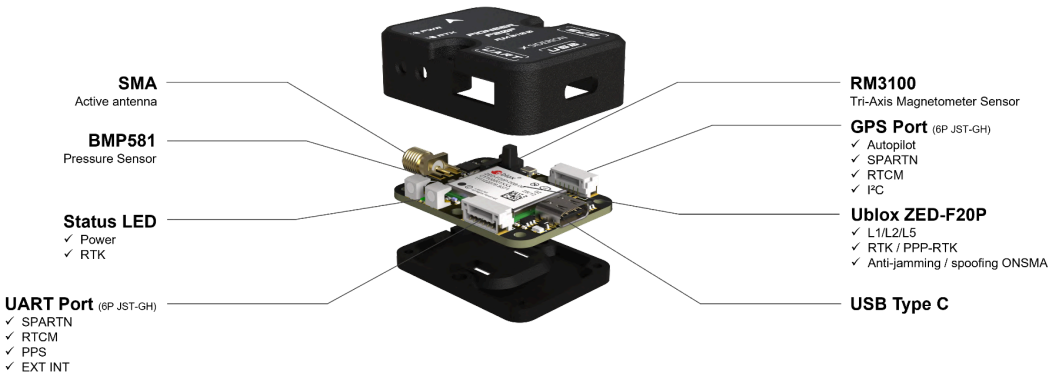

IMPORTANT NOTICE – PLEASE READ CAREFULLY

Siderion reserves the right to make changes, corrections, enhancements, modifications, and improvements to Siderion products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on Siderion products before placing orders. Siderion products are sold pursuant to Siderion's terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of Siderion products and Siderion assumes no liability for application assistance or the design of Purchasers' products.

No license, express or implied, to any intellectual property right is granted by Siderion herein.

Resale of Siderion products with provisions different from the information set forth herein shall void any warranty granted by Siderion for such product.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

2026 Siderion – All rights reserved