



# SIDERION

## FORGED FOR MOTION

Product Catalog



GNSS & RTK Systems

GNSS Antennas

UAV Sensors

Electronic Speed Controllers

Flight Controllers

Drone Equipment

---

## Foreword

When we established Siderion right out of Toulouse, France, our vision was to build high-precision navigation and drone electronics that autonomous systems can blindly trust.

We didn't want to just manufacture components; we wanted to create technology with passion, grounded in local expertise, ethical labor, and uncompromising standards. No outsourcing, no shortcuts.

Motion demands absolute precision, whether it's navigating a complex UAV, stabilizing a robotic platform, or pushing the limits of RTK GNSS tracking. That ethos is built into every product we design.

From our high-precision GNSS receivers (like the DP0601 and the triple-band ZED-F20P-powered lineup) to our ruggedized sensors, magnetometers (RM3100), and airspeed modules, our hardware is designed to perform seamlessly when it matters most and compatible with the ecosystems you already rely on, like PX4, ArduPilot, and Betaflight.

Inside this catalog, you'll find the culmination of our work: professional-grade tools engineered for maximum reliability, extreme accuracy, and effortless integration.

Dive in, explore what we've forged, and let's keep pushing the boundaries of autonomous motion together.

Siderion's team - FORGED FOR MOTION

# Contents

|                                |           |
|--------------------------------|-----------|
| <b>Foreword</b>                | <b>2</b>  |
| <b>GNSS RTK Receivers</b>      | <b>4</b>  |
| DP0601                         | 4         |
| Sirius F9P                     | 5         |
| SP0700                         | 6         |
| SP0701                         | 7         |
| SP0702                         | 8         |
| SP0703                         | 9         |
| Beacon F20P                    | 10        |
| Pioneer F20P                   | 11        |
| <b>Standard GNSS Receivers</b> | <b>12</b> |
| Polaris F10N                   | 12        |
| <b>GNSS Antennas</b>           | <b>13</b> |
| SA233                          | 13        |
| SA275                          | 14        |
| SA435                          | 15        |
| ANN-MB                         | 16        |
| ANN-MB2                        | 17        |
| SA910                          | 18        |
| <b>Sensors</b>                 | <b>19</b> |
| RM3100                         | 19        |
| MS4525 Airspeed                | 20        |
| MS5525 Airspeed                | 21        |
| SDP33 Airspeed                 | 22        |
| BMM350                         | 23        |
| VL53L1X                        | 24        |
| <b>Product Description</b>     | <b>25</b> |

## GNSS RTK Receivers

### DP0601


€149.90 tax excl.

Active

From 50 units: €134.91 (10% off)  
 From 100 units: €131.16 (12.5% off)  
 From 200 units: €127.42 (15% off)  
 From 500 units: €123.67 (17.5% off)



[DP0601 →](#)

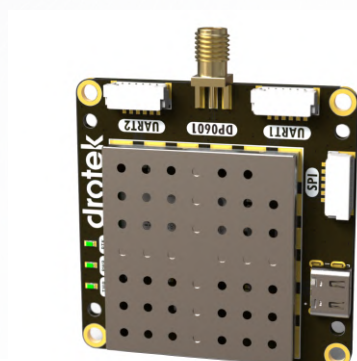

#### Main Features

- ☒ L1/L2 RTK based on the u-blox ZED-F9P
- ☒ SMA input connector (active GNSS antenna)
- ☒ USB-C & JST-GH interfaces
- ☒ Compatible with Pixhawk & ArduPilot
- ☒ Easy to integrate in any GNSS projects

Built around the proven u-blox ZED-F9P multi-band GNSS engine, the Siderion DP0601 offers fast RTK convergence and robust multi-constellation tracking to ensure precise positioning in complex environments. Equipped with standard JST-GH interfaces and native compatibility with ArduPilot and Pixhawk flight stacks, it provides a dependable, drop-in high-precision solution for modern robotics and UAV architectures.

#### Specification

|               |                |
|---------------|----------------|
| GNSS Chip     | U-blox ZED-F9P |
| GNSS Bands    | L1/L2          |
| Antenna Input | Active Antenna |

#### Interface

|         |                   |
|---------|-------------------|
| UART    | 2 (UART1 & UART2) |
| USB     | 1                 |
| SPI     | 1 (SPI or I2C)    |
| I2C     | 1 (I2C or SPI)    |
| PPS Out | 1                 |

#### Electrical Data

|             |                   |
|-------------|-------------------|
| Voltage     | 5V                |
| I/O Voltage | 3.3V              |
| Current     | 50mA to max 120mA |

#### Mechanical Data

|             |                |
|-------------|----------------|
| Size        | 50x50x7mm      |
| Weight      | 17g            |
| Temperature | -40°C to +70°C |

Read the full datasheet here: [DP0601](#)

## GNSS RTK Receivers

### Sirius F9P

€249.90 tax excl.

Active

From 50 units: €224.91 (10% off)  
 From 100 units: €218.66 (12.5% off)  
 From 200 units: €212.42 (15% off)  
 From 500 units: €206.17 (17.5% off)



[Sirius F9P →](#)



#### Main Features

- ✓ L1/L2 RTK based on the u-blox ZED-F9P
- ✓ Embedded L1/L2 Active Antenna
- ✓ USB-C & JST-GH interfaces
- ✓ **RM3100** professional-grade magnetometer
- ✓ Compatible with Pixhawk & ArduPilot

Engineered for applications where space and weight are critical, the Siderion SP0700 pairs the advanced u-blox ZED-F20P triple-band engine with an exceptionally small footprint. Designed with castellated edge holes matching standard 2.0mm pitch surface-mount footprints, it can be soldered directly onto host PCB boards for streamlined hardware integration to deliver rapid RTK convergence and sub-centimeter accuracy.

#### Specification

|            |                         |
|------------|-------------------------|
| GNSS Chip  | U-blox ZED-F9P          |
| GNSS Bands | L1/L2                   |
| Antenna    | Embedded active Antenna |
| RM3100     | Yes (1)                 |

#### Interface

|         |                |
|---------|----------------|
| UART    | 2 (GPS & UART) |
| USB     | 1              |
| I2C     | 1              |
| PPS Out | 1              |

#### Electrical Data

|             |                   |
|-------------|-------------------|
| Voltage     | 5V                |
| I/O Voltage | 3.3V              |
| Current     | 50mA to max 120mA |

#### Mechanical Data

|             |                |
|-------------|----------------|
| Size        | 74x74x22mm     |
| Weight      | 100g           |
| Temperature | -40°C to +70°C |

Read the full datasheet here: [SP0700](#)

## GNSS RTK Receivers

### SP0700

€179.90 tax excl.

Active

From 50 units: €161.91 (10% off)  
 From 100 units: €157.41 (12.5% off)  
 From 200 units: €152.92 (15% off)  
 From 500 units: €148.42 (17.5% off)



[SP0700 →](#)

#### Main Features



- ☒ L1/L2/L5 RTK based on the u-blox ZED-F20P
- ☒ Compact form factor
- ☒ Castellated holes for module soldering
- ☒ "Zigbee-type" mounting
- ☒ u.FL or SMA GNSS input options

Engineered for applications where space and weight are critical, the Siderion SP0700 pairs the advanced u-blox ZED-F20P triple-band engine with an exceptionally small footprint. Designed with castellated edge holes matching standard 2.0mm pitch surface-mount footprints, it can be soldered directly onto host PCB boards for streamlined hardware integration to deliver rapid RTK convergence and sub-centimeter accuracy.

#### Specification

|               |                 |
|---------------|-----------------|
| GNSS Chip     | U-blox ZED-F20P |
| GNSS Bands    | L1/L2/L5        |
| Antenna Input | Active Antenna  |

#### Interface

|         |                   |
|---------|-------------------|
| UART    | 2 (UART1 & UART2) |
| USB     | 1                 |
| SPI     | 1 (SPI or I2C)    |
| I2C     | 1 (I2C or SPI)    |
| PPS Out | 1                 |

#### Electrical Data

|             |                   |
|-------------|-------------------|
| Voltage     | 3.3V              |
| I/O Voltage | 3.3V              |
| Current     | 50mA to max 120mA |

#### Mechanical Data

|             |                |
|-------------|----------------|
| Size        | 28x24x6mm      |
| Weight      | 6g             |
| Temperature | -40°C to +70°C |

Read the full datasheet here: [SP0700](#)


## GNSS RTK Receivers

### SP0701


€189.90 tax excl.

Active

From 50 units: €170.91 (10% off)  
 From 100 units: €166.16 (12.5% off)  
 From 200 units: €161.42 (15% off)  
 From 500 units: €156.67 (17.5% off)



[SP0701 →](#)

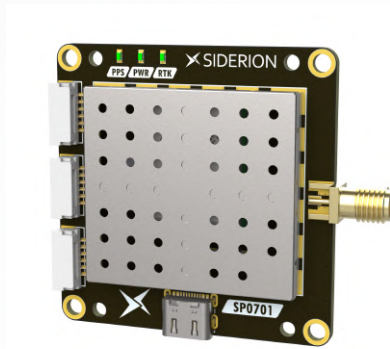

#### Main Features

- ✓ L1/L2/L5 RTK based on the u-blox ZED-F20P
- ✓ SMA input connector (active GNSS antenna)
- ✓ USB-C & JST-GH interfaces
- ✓ Compatible with Pixhawk & ArduPilot
- ✓ Easy to integrate in any GNSS projects

The SP0701 is a high-performance RTK GNSS module powered by the u-blox ZED-F20P receiver. Successor to the best-selling “DP0601”, it delivers centimeter-level positioning accuracy for demanding autonomous systems. Designed with standard JST-GH interfaces and plug-and-play support for Pixhawk, ArduPilot, and Betaflight, it integrates effortlessly into UAVs, robotics, precision agriculture, and mapping platforms.

#### Specification

|               |                 |
|---------------|-----------------|
| GNSS Chip     | U-blox ZED-F20P |
| GNSS Bands    | L1/L2/L5        |
| Antenna Input | Active Antenna  |

#### Interface

|         |                   |
|---------|-------------------|
| UART    | 2 (UART1 & UART2) |
| USB     | 1                 |
| SPI     | 1 (SPI or I2C)    |
| I2C     | 1 (I2C or SPI)    |
| PPS Out | 1                 |

#### Electrical Data

|             |                   |
|-------------|-------------------|
| Voltage     | 5V                |
| I/O Voltage | 3.3V              |
| Current     | 50mA to max 120mA |

#### Mechanical Data

|             |                |
|-------------|----------------|
| Size        | 50x50x7mm      |
| Weight      | 17g            |
| Temperature | -40°C to +70°C |

Read the full datasheet here: [SP0701](#)

## GNSS RTK Receivers

### SP0702


€189.90 tax excl.

Active

From 50 units: €170.91 (10% off)  
 From 100 units: €166.16 (12.5% off)  
 From 200 units: €161.42 (15% off)  
 From 500 units: €156.67 (17.5% off)



[SP0702 →](#)



#### Main Features

- ☒ L1/L2/L5 RTK based on the u-blox ZED-F20P
- ☒ u.FL input connector (active GNSS antenna)
- ☒ mini PCIe interface.
- ☒ Easy to integrate in any GNSS projects

The SP0702 is a high-performance RTK GNSS module built into an industry-standard Mini PCIe form factor, powered by the u-blox ZED-F20P engine to deliver sub-centimeter positioning accuracy. By leveraging a standard mPCIe slot, it eliminates custom carrier board redesigns allowing engineers to instantly add high-precision navigation to industrial PCs, single-board computers, and flight controllers via a simple plug-and-play card.

#### Specification

|               |                     |
|---------------|---------------------|
| GNSS Chip     | U-blox ZED-F20P     |
| GNSS Bands    | L1/L2/L5            |
| Antenna Input | Active u.FL Antenna |
| Other         | Mini PCI Express    |

#### Interface

|         |                   |
|---------|-------------------|
| UART    | 2 (UART1 & UART2) |
| USB     | 1                 |
| SPI     | 1 (SPI or I2C)    |
| I2C     | 1 (I2C or SPI)    |
| PPS Out | 1                 |

#### Electrical Data

|             |                   |
|-------------|-------------------|
| Voltage     | 3.3V              |
| I/O Voltage | 3.3V              |
| Current     | 50mA to max 120mA |

#### Mechanical Data

|             |                |
|-------------|----------------|
| Size        | 51x30x4.1mm    |
| Weight      | 12g            |
| Temperature | -40°C to +70°C |

Read the full datasheet here: [SP0702](#)

## GNSS RTK Receivers

### SP0703

€199.90 tax excl.

Active

From 50 units: €179.91 (10% off)  
 From 100 units: €174.91 (12.5% off)  
 From 200 units: €169.92 (15% off)  
 From 500 units: €164.92 (17.5% off)



[SP0703 →](#)

#### Main Features

- ☒ L1/L2/L5 RTK based on the u-blox ZED-F20P
- ☒ **RM3100** professional-grade magnetometer
- ☒ **BMP581** high precision pressure sensor
- ☒ USB-C & JST-GH interfaces
- ☒ Compatible with Pixhawk & ArduPilot



Engineered as a complete positioning and orientation solution, the Siderion SP0703 combines the u-blox ZED-F20P triple-band (L1/L2/L5) RTK engine with a magneto-inductive RM3100 magnetometer and a high-accuracy BMP581 barometer for precise vertical measurement. Featuring standard JST-GH connectors for native ArduPilot and Pixhawk integration, it delivers reliable position, heading, and altitude data in a single product.

#### Specification

|               |                 |
|---------------|-----------------|
| GNSS Chip     | U-blox ZED-F20P |
| GNSS Bands    | L1/L2/L5        |
| Antenna Input | Active Antenna  |
| RM3100        | Yes (1)         |
| BMP581        | Yes (1)         |

#### Interface

|         |                   |
|---------|-------------------|
| UART    | 2 (UART1 & UART2) |
| USB     | 1                 |
| I2C     | 1                 |
| PPS Out | 1                 |

#### Electrical Data

|             |                   |
|-------------|-------------------|
| Voltage     | 5V                |
| I/O Voltage | 3.3V              |
| Current     | 50mA to max 130mA |

#### Mechanical Data

|             |                |
|-------------|----------------|
| Size        | 40x30x8mm      |
| Weight      | 13g            |
| Temperature | -40°C to +70°C |

Read the full datasheet here: [SP0703](#)

## GNSS RTK Receivers

### Beacon F20P

€209.90 tax excl.

Active

From 50 units: €188.91 (10% off)  
 From 100 units: €183.66 (12.5% off)  
 From 200 units: €178.42 (15% off)  
 From 500 units: €173.17 (17.5% off)



[Beacon F20P →](#)



#### Main Features

- ☒ L1/L2/L5 RTK based on the u-blox ZED-F20P
- ☒ **RM3100** professional-grade magnetometer
- ☒ **BMP581** high precision pressure sensor
- ☒ USB-C & JST-GH interfaces
- ☒ Compatible with Pixhawk & ArduPilot

Engineered as a complete positioning and orientation solution, the Siderion SP0703 combines the u-blox ZED-F20P triple-band (L1/L2/L5) RTK engine with a magneto-inductive RM3100 magnetometer and a high-accuracy BMP581 barometer for precise vertical measurement. Featuring standard JST-GH connectors for native ArduPilot and Pixhawk integration, it delivers reliable position, heading, and altitude data in a single product.

#### Specification

|               |                 |
|---------------|-----------------|
| GNSS Chip     | U-blox ZED-F20P |
| GNSS Bands    | L1/L2/L5        |
| Antenna Input | Active Antenna  |
| RM3100        | Yes (1)         |
| BMP581        | Yes (1)         |

#### Interface

|         |                   |
|---------|-------------------|
| UART    | 2 (UART1 & UART2) |
| USB     | 1                 |
| I2C     | 1                 |
| PPS Out | 1                 |

#### Electrical Data

|             |                   |
|-------------|-------------------|
| Voltage     | 5V                |
| I/O Voltage | 3.3V              |
| Current     | 50mA to max 130mA |

#### Mechanical Data

|             |                |
|-------------|----------------|
| Size        | 63x33x13mm     |
| Weight      | 20g            |
| Temperature | -40°C to +70°C |

Read the full datasheet here: [Beacon F20P](#)

## GNSS RTK Receivers

### Pioneer F20P

€209.90 tax excl.

Active

From 50 units: €188.91 (10% off)  
 From 100 units: €183.66 (12.5% off)  
 From 200 units: €178.42 (15% off)  
 From 500 units: €173.17 (17.5% off)



[Pioneer F20P →](#)



#### Main Features

- ☒ L1/L2/L5 RTK based on the u-blox ZED-F20P
- ☒ **RM3100** professional-grade magnetometer
- ☒ **BMP581** high precision pressure sensor
- ☒ USB-C & JST-GH interfaces
- ☒ Compatible with Pixhawk & ArduPilot

Engineered as a complete positioning and orientation solution, the Siderion SP0703 combines the u-blox ZED-F20P triple-band (L1/L2/L5) RTK engine with a magneto-inductive RM3100 magnetometer and a high-accuracy BMP581 barometer for precise vertical measurement. Featuring standard JST-GH connectors for native ArduPilot and Pixhawk integration, it delivers reliable position, heading, and altitude data in a single product.

#### Specification

|               |                 |
|---------------|-----------------|
| GNSS Chip     | U-blox ZED-F20P |
| GNSS Bands    | L1/L2/L5        |
| Antenna Input | Active Antenna  |
| RM3100        | Yes (1)         |
| BMP581        | Yes (1)         |

#### Interface

|         |                   |
|---------|-------------------|
| UART    | 2 (UART1 & UART2) |
| USB     | 1                 |
| I2C     | 1                 |
| PPS Out | 1                 |

#### Electrical Data

|             |                   |
|-------------|-------------------|
| Voltage     | 5V                |
| I/O Voltage | 3.3V              |
| Current     | 50mA to max 130mA |

#### Mechanical Data

|             |                |
|-------------|----------------|
| Size        | 43x33x13mm     |
| Weight      | 17g            |
| Temperature | -40°C to +70°C |

Read the full datasheet here: [Pioneer F20P](#)

## Standard GNSS Receivers

### Polaris F10N

€79.90 tax excl.

Active

From 50 units: €71.91 (10% off)  
 From 100 units: €69.91 (12.5% off)  
 From 200 units: €67.92 (15% off)  
 From 500 units: €65.92 (17.5% off)



[Polaris F10N →](#)



#### Main Features

- ☒ L1/L5 RTK based on the u-blox ZED-F9P
- ☒ Embedded GNSS passive patch antenna
- ☒ **RM3100** professional-grade magnetometer
- ☒ **BMP581** high precision pressure sensor
- ☒ Compatible with Pixhawk & ArduPilot

Unlock unmatched accuracy with the Polaris F10N, a cutting-edge standard GNSS receiver powered by a RM3100 magnetometer and a BMP581 barometric sensor.

Based on the u-blox DAN-F10N, it is perfect for drones, robotics, and IoT, this module delivers accurate positioning, reliable heading, and precise altitude tracking. Compact, efficient, and built for performance, the Polaris F10N is the ultimate GPS to elevate your project.

#### Specification

|            |                          |
|------------|--------------------------|
| GNSS Chip  | U-blox DAN-F10N          |
| GNSS Bands | L1/L5                    |
| Antenna    | Embedded Passive Antenna |
| RM3100     | Yes (1)                  |
| BMP581     | Yes (1)                  |

#### Interface

|         |         |
|---------|---------|
| UART    | 1 (GPS) |
| I2C     | 1       |
| PPS Out | 1       |

#### Electrical Data

|             |          |
|-------------|----------|
| Voltage     | 5V       |
| I/O Voltage | 3.3V     |
| Current     | Max 50mA |

#### Mechanical Data

|             |                |
|-------------|----------------|
| Size        | 50x50x7mm      |
| Weight      | 17g            |
| Temperature | -40°C to +70°C |

Read the full datasheet here: [Polaris F10N](#)

## GNSS Antennas

### SA233

€69.90 tax excl.

Active

From 50 units: €62.91 (10% off)  
 From 100 units: €61.16 (12.5% off)  
 From 200 units: €59.42 (15% off)  
 From 500 units: €57.67 (17.5% off)



[SA233 →](#)



#### Main Features

- ☒ L1/L2 GNSS helical active antenna
- ☒ Embedded GNSS passive patch antenna
- ☒ **RM3100** professional-grade magnetometer
- ☒ **BMP581** high precision pressure sensor
- ☒ Compatibility with Pixhawk & ArduPilot

The Siderion **SA233** is a high-performance helical multi-band active GNSS antenna designed for precision navigation and positioning applications.

The device allows concurrent reception of GPS /GLONASS / BeiDou & Galileo signals to improve signal availability. The minimum 2dBi peak gain is amplified using a 39dB LNA gain to ensure the best signal quality in any situation.

#### Specification

|                     |                                                                    |
|---------------------|--------------------------------------------------------------------|
| <b>GNSS Bands</b>   | GPS: L1/L2<br>GLONASS: G1/G2<br>BDS: B1/B2/B3<br>Galileo: E1/E5/E6 |
| <b>GNSS Gain</b>    | 39dB                                                               |
| <b>Antenna type</b> | Helical active antenna                                             |

#### Interface

|                     |            |
|---------------------|------------|
| <b>Connector</b>    | SMA (Male) |
| <b>Rubber Joint</b> | IP67       |

#### Electrical Data

|                |           |
|----------------|-----------|
| <b>Voltage</b> | 3V to 12V |
| <b>Current</b> | 50mA max  |

#### Mechanical Data

|                    |                |
|--------------------|----------------|
| <b>Size</b>        | 60x27.5mm      |
| <b>Weight</b>      | 16g            |
| <b>Temperature</b> | -40°C to +85°C |

Read the full datasheet here: [SA233](#)

## GNSS Antennas

### SA275

€69.90 tax excl.

Active

From 50 units: €62.91 (10% off)  
 From 100 units: €61.16 (12.5% off)  
 From 200 units: €59.42 (15% off)  
 From 500 units: €57.67 (17.5% off)



[SA275 →](#)



#### Main Features

- ✓ L1/L5 RTK based on the u-blox ZED-F9P
- ✓ Embedded GNSS passive patch antenna
- ✓ **RM3100** professional-grade magnetometer
- ✓ **BMP581** high precision pressure sensor
- ✓ JST-GH for compatibility with Pixhawk & ArduPilot

The Siderion SA275 is a high-performance helical multi-band active GNSS antenna designed for precision navigation and positioning applications.

Leveraging multi-arm, multi-feed point technology, it supports L1, L2 & L5 signal reception across BeiDou, GPS, GLONASS and Galileo satellite systems. The minimum 2dBi peak gain is amplified using a 32dB LNA gain to ensure the best signal quality in any situation.

#### Specification

|              |                        |
|--------------|------------------------|
| GNSS Bands   | GPS: L1/L2/L5          |
|              | GLONASS: G1/G2         |
|              | BDS: B1/B2/B3          |
|              | Galileo: E1/E5/E6      |
| GNSS Gain    | 32dB                   |
| Antenna type | Helical active antenna |

#### Interface

|              |            |
|--------------|------------|
| Connector    | SMA (Male) |
| Rubber Joint | IP67       |

#### Electrical Data

|         |          |
|---------|----------|
| Voltage | 3V to 6V |
| Current | 45mA max |

#### Mechanical Data

|             |                |
|-------------|----------------|
| Size        | 54x27.8mm      |
| Weight      | 16g            |
| Temperature | -40°C to +85°C |

Read the full datasheet here: [SA275](#)

## GNSS Antennas

### SA435

€69.90 tax excl.

Active

From 50 units: €62.91 (10% off)  
 From 100 units: €61.16 (12.5% off)  
 From 200 units: €59.42 (15% off)  
 From 500 units: €57.67 (17.5% off)



[SA435 →](#)



#### Main Features

- ✓ L1/L5 RTK based on the u-blox ZED-F9P
- ✓ Embedded GNSS passive patch antenna
- ✓ **RM3100** professional-grade magnetometer
- ✓ **BMP581** high precision pressure sensor
- ✓ JST-GH for compatibility with Pixhawk & ArduPilot

The Siderion SA435 is a high-performance helical multi-band active GNSS antenna designed for precision navigation and positioning applications.

Leveraging multi-arm, multi-feed point technology, it supports L1, L2 & L5 signal reception across BeiDou, GPS, GLONASS and Galileo satellite systems. The minimum 2dBi peak gain is amplified using a 35dB LNA gain to ensure the best signal quality in any situation.

#### Specification

|              |                        |
|--------------|------------------------|
| GNSS Bands   | GPS: L1/L2/L5          |
|              | GLONASS: G1/G2/G3      |
|              | BDS: B1/B2/B3          |
|              | Galileo: E1/E5/E6      |
| GNSS Gain    | 35dB                   |
| Antenna type | Helical active antenna |

#### Interface

|              |            |
|--------------|------------|
| Connector    | SMA (Male) |
| Rubber Joint | IP67       |

#### Electrical Data

|         |          |
|---------|----------|
| Voltage | 3V to 6V |
| Current | 45mA max |

#### Mechanical Data

|             |                |
|-------------|----------------|
| Size        | 43.5x40.8mm    |
| Weight      | 32g            |
| Temperature | -40°C to +85°C |

Read the full datasheet here: [SA435](#)

## GNSS Antennas

### ANN-MB

€49.90 tax excl.

Active

From 50 units: €44.91 (10% off)  
 From 100 units: €43.66 (12.5% off)  
 From 200 units: €42.42 (15% off)  
 From 500 units: €41.17 (17.5% off)



[ANN-MB →](#)

#### Main Features



- ☒ L1/L2 Dual-Feed active patch antenna
- ☒ High GNSS gain: 21dB
- ☒ Excellent price to performance ratio
- ☒ Compact and versatile
- ☒ 5m long cable

The u-blox ANN-MB multi-band (L1, L2/E5b/B2I) active GNSS antennas are designed to reduce time to market for the next generation of high precision GNSS applications, which require highly accurate location information. The compact design, excellent price to performance ratio, and versatile mounting and connector choices provide customers with fast, easy, and reliable multi-band antenna solutions. The ANN-MB antenna is a perfect match to the u-blox F9P based Siderion modules.

#### Specification

|              |                                |
|--------------|--------------------------------|
| GNSS Bands   | GPS: L1/L2                     |
|              | GLONASS: G1/G2                 |
|              | BDS: B1/B2                     |
|              | Galileo: E1/E5                 |
| GNSS Gain    | 21dB                           |
| Antenna type | Dual-feed active patch antenna |

#### Interface

|              |              |
|--------------|--------------|
| Connector    | SMA (Male)   |
| Mounting     | 2xM4mm holes |
| Cable length | 5m           |

#### Electrical Data

|         |          |
|---------|----------|
| Voltage | 3V to 5V |
| Current | 15mA     |

#### Mechanical Data

|             |                |
|-------------|----------------|
| Size        | 80x60x23mm     |
| Weight      | 173g           |
| Temperature | -40°C to +85°C |

Read the full datasheet here: [ANN-MB](#)

## GNSS Antennas

### ANN-MB2

€59.90 tax excl.

Active

From 50 units: €53.91 (10% off)  
 From 100 units: €52.41 (12.5% off)  
 From 200 units: €50.92 (15% off)  
 From 500 units: €49.42 (17.5% off)



[ANN-MB2 →](#)



#### Main Features

- ☒ L1/L2/L5 Active patch antenna
- ☒ High GNSS gain: 23dB
- ☒ Excellent price to performance ratio
- ☒ Compact and versatile
- ☒ 5m long cable

The u-blox ANN-MB2 multi-band (L1/L2/L5/E6/B3/L) active GNSS antenna is designed to reduce time-to-market for modern wide-frequency, multi-constellation, high precision GNSS applications. Its robust design, excellent price-to-performance ratio, and flexible mounting options make ANN-MB2 an ideal choice for mass market applications requiring an all-band high precision GNSS antenna. ANN-MB2 is a perfect match to the u-blox triple-band F20 (e.g. ZED-D20P) and all-band X20 high precision platform (e.g. ZED-X20P).

#### Specification

|              |                                |
|--------------|--------------------------------|
| GNSS Bands   | GPS: L1/L2/L5                  |
|              | BDS: B1/B2/B3                  |
|              | Galileo: E1/E6                 |
| GNSS Gain    | 23dB                           |
| Antenna type | Dual-feed active patch antenna |

#### Interface

|              |              |
|--------------|--------------|
| Connector    | SMA (Male)   |
| Mounting     | 2xM4mm holes |
| Cable length | 5m           |

#### Electrical Data

|         |          |
|---------|----------|
| Voltage | 3V to 5V |
| Current | 15mA     |

#### Mechanical Data

|             |                   |
|-------------|-------------------|
| Size        | 108.5x92.9x24.7mm |
| Weight      | 260g              |
| Temperature | -40°C to +85°C    |

Read the full datasheet here: [ANN-MB2](#)

## GNSS Antennas

### SA910

€99.90 tax excl.

Active

From 50 units: €89.91 (10% off)  
 From 100 units: €87.41 (12.5% off)  
 From 200 units: €84.92 (15% off)  
 From 500 units: €82.42 (17.5% off)



[SA910 →](#)



#### Main Features

- ☒ L1/L5 RTK based on the u-blox ZED-F9P
- ☒ Embedded GNSS passive patch antenna
- ☒ **RM3100** professional-grade magnetometer
- ☒ **BMP581** high precision pressure sensor
- ☒ JST-GH for compatibility with Pixhawk & ArduPilot

The SA910 is an affordable and highly efficient multi-band GNSS active antenna and allows concurrent reception of GPS/GLONASS/BeiDou & Galileo signals to improve signal availability. The minimum 5dBi peak gain is amplified using a 40dB LNA gain to ensure the best signal quality in any situation. Its magnetic pod makes it an ideal choice to be easily attached to larger vehicles such as tractors and heavy machines. The SA910 antenna is also the best choice for RTK GNSS bases.

#### Specification

|              |                      |
|--------------|----------------------|
| GNSS Bands   | GPS: L1/L2/L5        |
|              | GLONASS: G1/G2/G3    |
|              | BDS: B1/B2/B3        |
|              | Galileo: E1/E2/E5/E6 |
| GNSS Gain    | 40dB                 |
| Antenna type | Active antenna       |

#### Interface

|              |                    |
|--------------|--------------------|
| Connector    | TNC-K              |
| Rubber Joint | IP67               |
| Cable length | 1m long TNC to SMA |

#### Electrical Data

|         |           |
|---------|-----------|
| Voltage | 3V to 12V |
| Current | 50mA max  |

#### Mechanical Data

|             |                |
|-------------|----------------|
| Size        | 151.5x66.5mm   |
| Weight      | 16g            |
| Temperature | -40°C to +85°C |

Read the full datasheet here: [SA910](#)

## Sensors

### RM3100

€42.90 tax excl.

Active

From 50 units: €38.61 (10% off)  
 From 100 units: €37.54 (12.5% off)  
 From 200 units: €36.47 (15% off)  
 From 500 units: €35.39 (17.5% off)



[RM3100 →](#)



#### Main Features

- ✓ Most popular RM3100 module on the market
- ✓ Low power consumption <5mA
- ✓ High-resolution (13nT)
- ✓ Compatible with Pixhawk & ArduPilot

Achieve unmatched heading precision with the professional-grade **RM3100** magnetometer. Ultra-low power, compact size, and an extensive dynamic range.

Ideal for UAVs, drones, robotics, and precision farming.

#### Specification

|             |                        |
|-------------|------------------------|
| Sensor chip | PNI RM3100             |
| Resolution  | 13nT @200 Cycle Counts |
| Mag range   | ±800μT                 |

#### Interface

|     |          |
|-----|----------|
| SPI | 1 (1Mhz) |
| I2C | 1 (1MHz) |

#### Electrical Data

|             |          |
|-------------|----------|
| Voltage     | 5V       |
| I/O Voltage | 3.3V     |
| Current     | 10mA max |

#### Mechanical Data

|             |                |
|-------------|----------------|
| Size        | 33x26x10mm     |
| Weight      | 7g             |
| Temperature | -40°C to +70°C |

Read the full datasheet here: [RM3100](#)

## Sensors

### MS4525 Airspeed

€42.90 tax excl.

Active

From 50 units: €38.61 (10% off)  
 From 100 units: €37.54 (12.5% off)  
 From 200 units: €36.47 (15% off)  
 From 500 units: €35.39 (17.5% off)



[MS4525 →](#)



#### Main Features

- ☒ High-Accuracy (14 bit ADC)
- ☒ Differential inputs, ideal for Pitot tubes
- ☒ ±1 PSI pressure range (Max speed: 350Km/h)
- ☒ Compatible with Pixhawk & ArduPilot

Achieve outstanding airspeed accuracy with the MS4525 Airspeed.  
 A small, differential, high-performance pressure sensor based on the TE MS4525DO.

Ideal for unmanned aerial vehicles, drones, fixed-wings, robotics.

#### Specification

|                |                             |
|----------------|-----------------------------|
| Sensor chip    | TE MS4525DO                 |
| Resolution     | 14bit ADC                   |
| Pressure range | ±1 PSI (Max speed: 350Km/h) |

#### Interface

|       |                      |
|-------|----------------------|
| I2C   | 1 (400KHz)           |
| Input | 1 differential input |

#### Electrical Data

|             |         |
|-------------|---------|
| Voltage     | 5V      |
| I/O Voltage | 3.3V    |
| Current     | 3mA max |

#### Mechanical Data

|             |                |
|-------------|----------------|
| Size        | 33x26x15mm     |
| Weight      | 8g             |
| Temperature | -40°C to +70°C |

Read the full datasheet here: [MS4525 Airspeed](#)

## Sensors

### MS5525 Airspeed

€49.90 tax excl.

Active

From 50 units: €44.91 (10% off)  
 From 100 units: €43.66 (12.5% off)  
 From 200 units: €42.42 (15% off)  
 From 500 units: €41.17 (17.5% off)



[MS5525 →](#)



#### Main Features

- ☒ High-Accuracy (24 bit ADC)
- ☒ Differential inputs, ideal for Pitot tubes
- ☒ ±1 PSI pressure range (Max speed: 350Km/h)
- ☒ Compatible with Pixhawk & ArduPilot

Achieve outstanding airspeed accuracy with the MS5525 Airspeed.  
 A small, differential, high-performance pressure sensor based on the TE MS5525DSO.

Ideal for unmanned aerial vehicles, drones, fixed-wings, robotics.

#### Specification

|                |                             |
|----------------|-----------------------------|
| Sensor chip    | TE MS5525DSO                |
| Resolution     | 24bit ADC                   |
| Pressure range | ±1 PSI (Max speed: 350Km/h) |

#### Interface

|       |                      |
|-------|----------------------|
| SPI   | 1 (2MHz)             |
| I2C   | 1 (400KHz)           |
| Input | 1 differential input |

#### Electrical Data

|             |         |
|-------------|---------|
| Voltage     | 5V      |
| I/O Voltage | 3.3V    |
| Current     | 2mA max |

#### Mechanical Data

|             |                |
|-------------|----------------|
| Size        | 33x26x10mm     |
| Weight      | 7g             |
| Temperature | -40°C to +70°C |

Read the full datasheet here: [MS5525 Airspeed](#)

## Sensors

### SDP33 Airspeed

€49.90 tax excl.

Active

From 50 units: €44.91 (10% off)  
 From 100 units: €43.66 (12.5% off)  
 From 200 units: €42.42 (15% off)  
 From 500 units: €41.17 (17.5% off)



[SDP33 →](#)



#### Main Features

- ☒ High-Accuracy (16 bit ADC)
- ☒ Differential inputs, ideal for Pitot tubes
- ☒ ±1500Pa pressure range (Max speed: 180Km/h)
- ☒ Compatible with Pixhawk & ArduPilot

Achieve outstanding airspeed accuracy with the SDP33 Airspeed.

A tiny form factor, differential, high-performance pressure sensor based on the Sensirion SDP33.

Ideal for unmanned aerial vehicles, drones, fixed-wings, robotics.

#### Specification

|                |                 |
|----------------|-----------------|
| Sensor chip    | Sensirion SDP33 |
| Resolution     | 16bit ADC       |
| Pressure range | ±1500Pa         |

#### Interface

|       |                       |
|-------|-----------------------|
| I2C   | 1 (400KHz)            |
| Input | 1 differential input  |
| Other | No calibration needed |

#### Electrical Data

|             |          |
|-------------|----------|
| Voltage     | 5V       |
| I/O Voltage | 3.3V     |
| Current     | Max 50mA |

#### Mechanical Data

|             |                |
|-------------|----------------|
| Size        | 26x17x8mm      |
| Weight      | 4g             |
| Temperature | -40°C to +70°C |

Read the full datasheet here: [SDP33 Airspeed](#)

## Sensors

### BMM350

€19.90 tax excl.

Active

From 50 units: €17.91 (10% off)  
 From 100 units: €17.41 (12.5% off)  
 From 200 units: €16.92 (15% off)  
 From 500 units: €16.42 (17.5% off)



[BMM350 →](#)



#### Main Features

- ✓ Magnetic sensor based on Bosch's BMM350
- ✓ Low power consumption (200µA @100Hz)
- ✓ Wide magnetic field range ( $\pm 2000 \mu\text{T}$  on all axis)
- ✓ Minuscule footprint & weight (26x17x8mm / 4g)
- ✓ Compatible with Pixhawk & ArduPilot

The BMM350 is Bosch's next-generation 3-axis geomagnetic sensor, designed to give microcontrollers precise compass heading and dead-reckoning support. Whether you're equipping an autonomous drone with reliable heading tracking, building head-tracking hardware for VR/AR, or adding indoor navigation to a wearable, the BMM350 handles stray magnetic interference effortlessly thanks to its built-in field-shock reset features.

#### Specification

**Sensor chip** Bosch Sensortech BMM350  
**Resolution** ~100nT  
**Magnetic range**  $\pm 2000 \mu\text{T}$  for X, Y, and Z axes

#### Interface

**I2C** 1 (1MHz)

#### Electrical Data

**Voltage** 5V  
**I/O Voltage** 3.3V  
**Current** Max 3.5mA

#### Mechanical Data

**Size** 26x17x8mm  
**Weight** 4g  
**Temperature** -40°C to +70°C

Read the full datasheet here: [BMM350](#)

## Sensors

### VL53L1X

€19.90 tax excl.

Active

From 50 units: €17.91 (10% off)  
 From 100 units: €17.41 (12.5% off)  
 From 200 units: €16.92 (15% off)  
 From 500 units: €16.42 (17.5% off)



[VL53L1X →](#)



#### Main Features

- ☒ Time-of-Flight IR Sensor based on ST's VL53L1X
- ☒ Distance up to 400cm
- ☒ Infrared protective cover
- ☒ Minuscule footprint & weight (26x17x8mm / 4g)
- ☒ Compatible with Pixhawk & ArduPilot

The ST VL53L1X Time-of-Flight range sensor powered by STMicroelectronics, is a micro-laser module that accurately measures distances up to 400 cm (13 feet) at speeds up to 50 Hz. Unlike traditional infrared sensors that estimate distance based on reflected light intensity, the VL53L1X measures the exact time it takes for photons to bounce back, ensuring target color, reflectivity, and surface texture don't distort your readings.

#### Specification

|                    |             |
|--------------------|-------------|
| Sensor chip        | VL53L1X     |
| Field of View      | 15 to 27°   |
| Distance           | Up to 400cm |
| Sampling frequency | up to 50Hz  |

#### Interface

|     |            |
|-----|------------|
| I2C | 1 (400KHz) |
|-----|------------|

#### Electrical Data

|             |          |
|-------------|----------|
| Voltage     | 5V       |
| I/O Voltage | 3.3V     |
| Current     | Max 20mA |


#### Mechanical Data

|             |                |
|-------------|----------------|
| Size        | 26x17x8mm      |
| Weight      | 4g             |
| Temperature | -40°C to +70°C |

Read the full datasheet here: [VL53L1X](#)

## Product Description


### DP0601

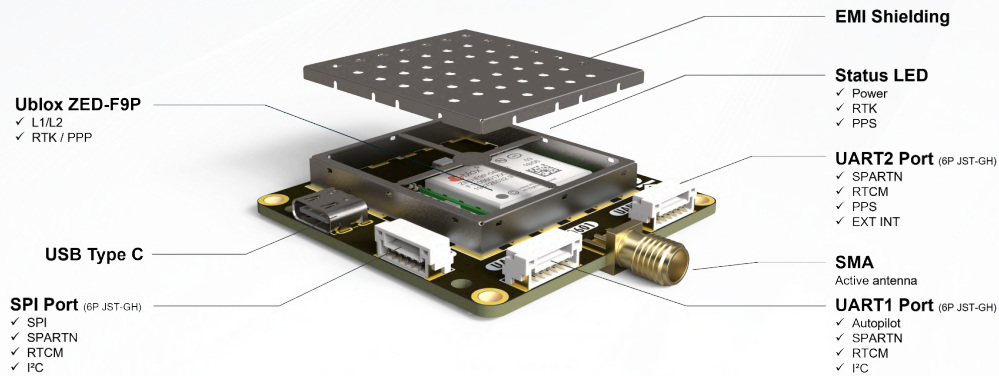


### Sirius F9P




### SP0700

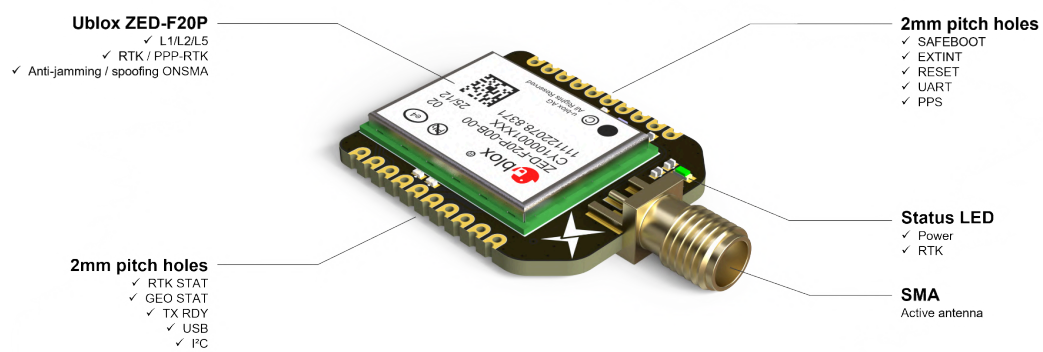


## SP0701

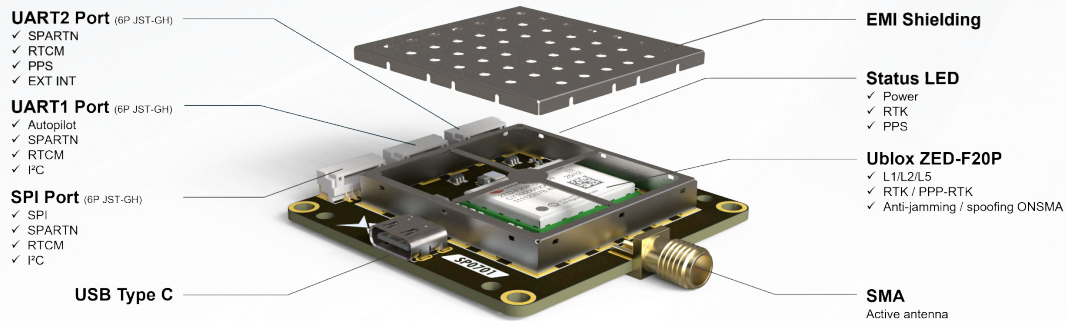


## SP0702

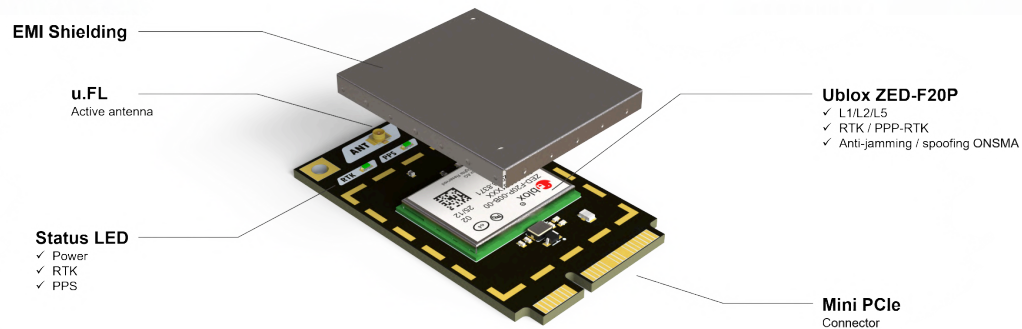


## SP0703

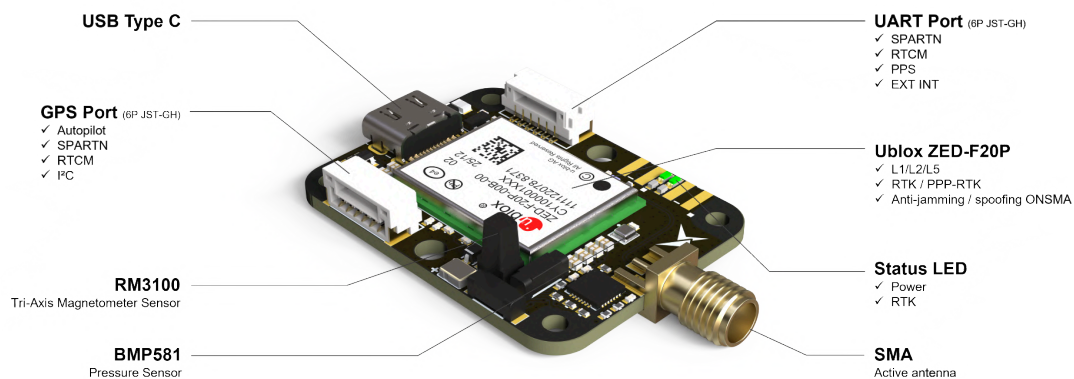


## Beacon F20P

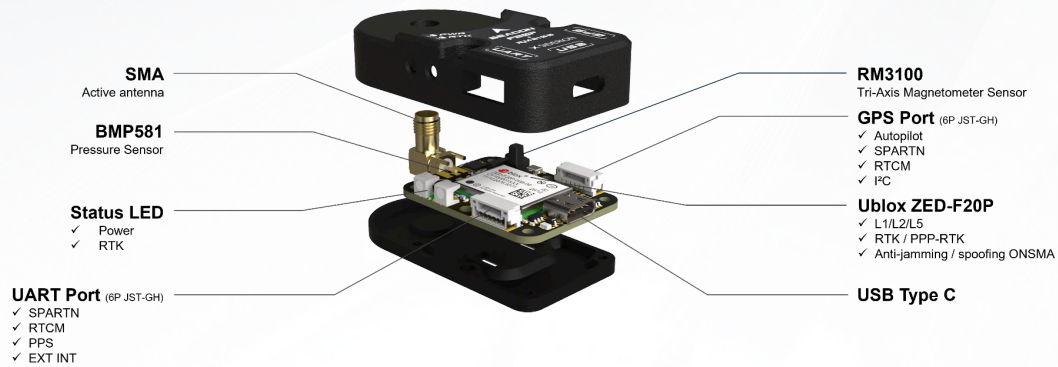


## Pioneer F20P

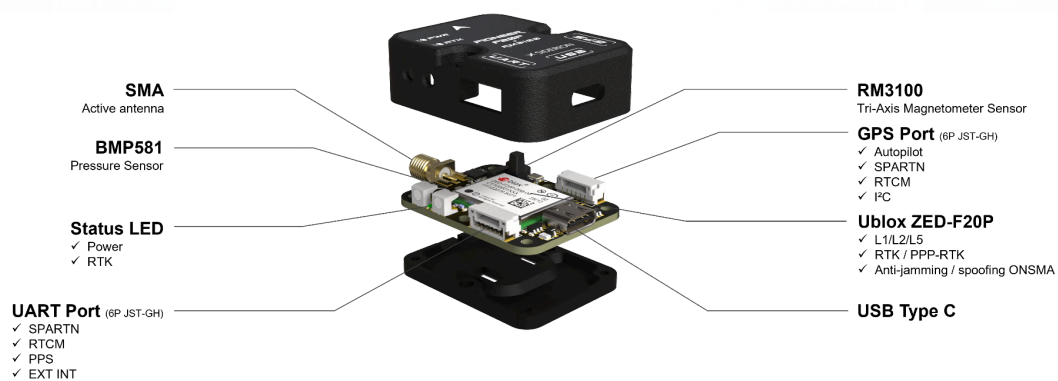


## Polaris F10N

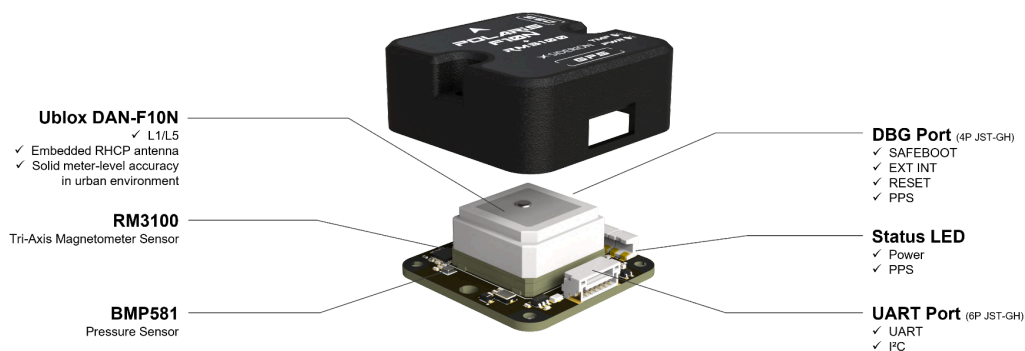


## RM3100

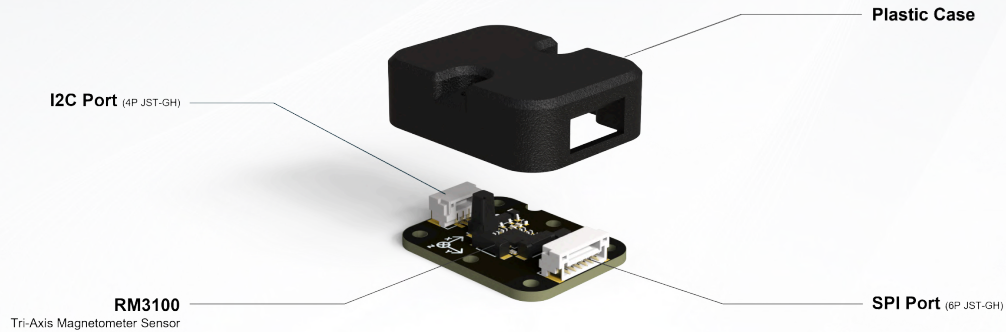

## Pioneer F20P

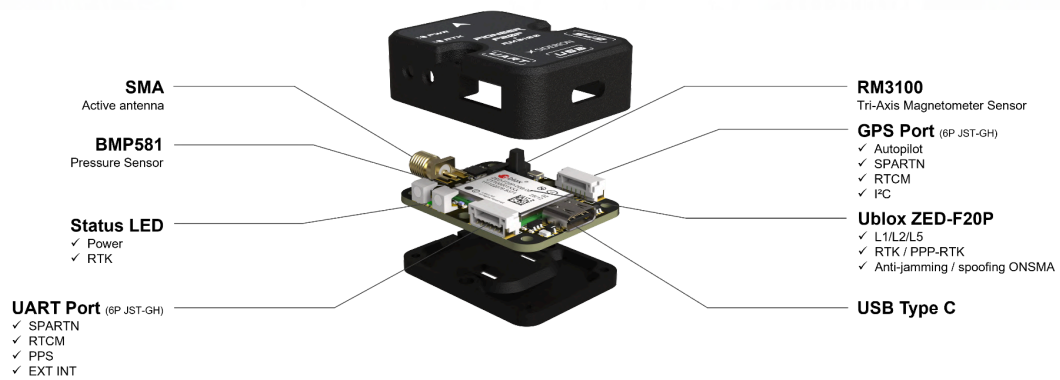

## Pioneer F20P

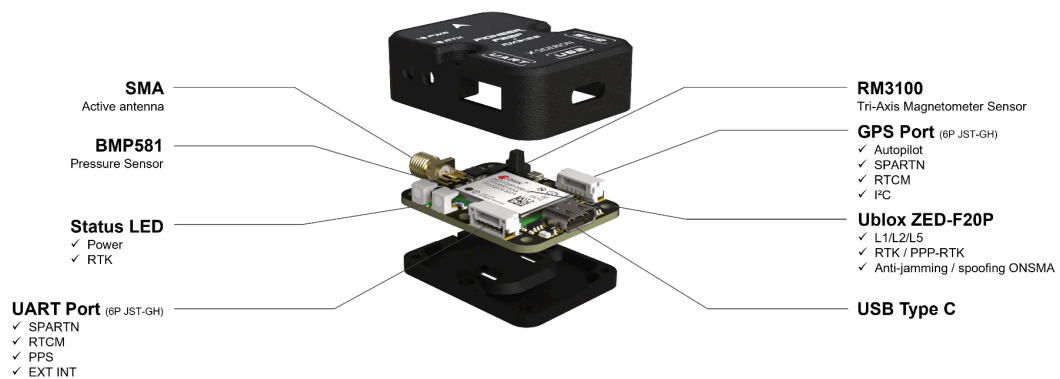

### **IMPORTANT NOTICE – PLEASE READ CAREFULLY**

Siderion reserves the right to make changes, corrections, enhancements, modifications, and improvements to Siderion products and/or to this document at any time without notice. Purchasers should obtain the latest relevant information on Siderion products before placing orders. Siderion products are sold pursuant to Siderion's terms and conditions of sale in place at the time of order acknowledgement.

Purchasers are solely responsible for the choice, selection, and use of Siderion products and Siderion assumes no liability for application assistance or the design of Purchasers' products.

No license, express or implied, to any intellectual property right is granted by Siderion herein.

Resale of Siderion products with provisions different from the information set forth herein shall void any warranty granted by Siderion for such product.

Information in this document supersedes and replaces information previously supplied in any prior versions of this document.

2026 Siderion – All rights reserved

