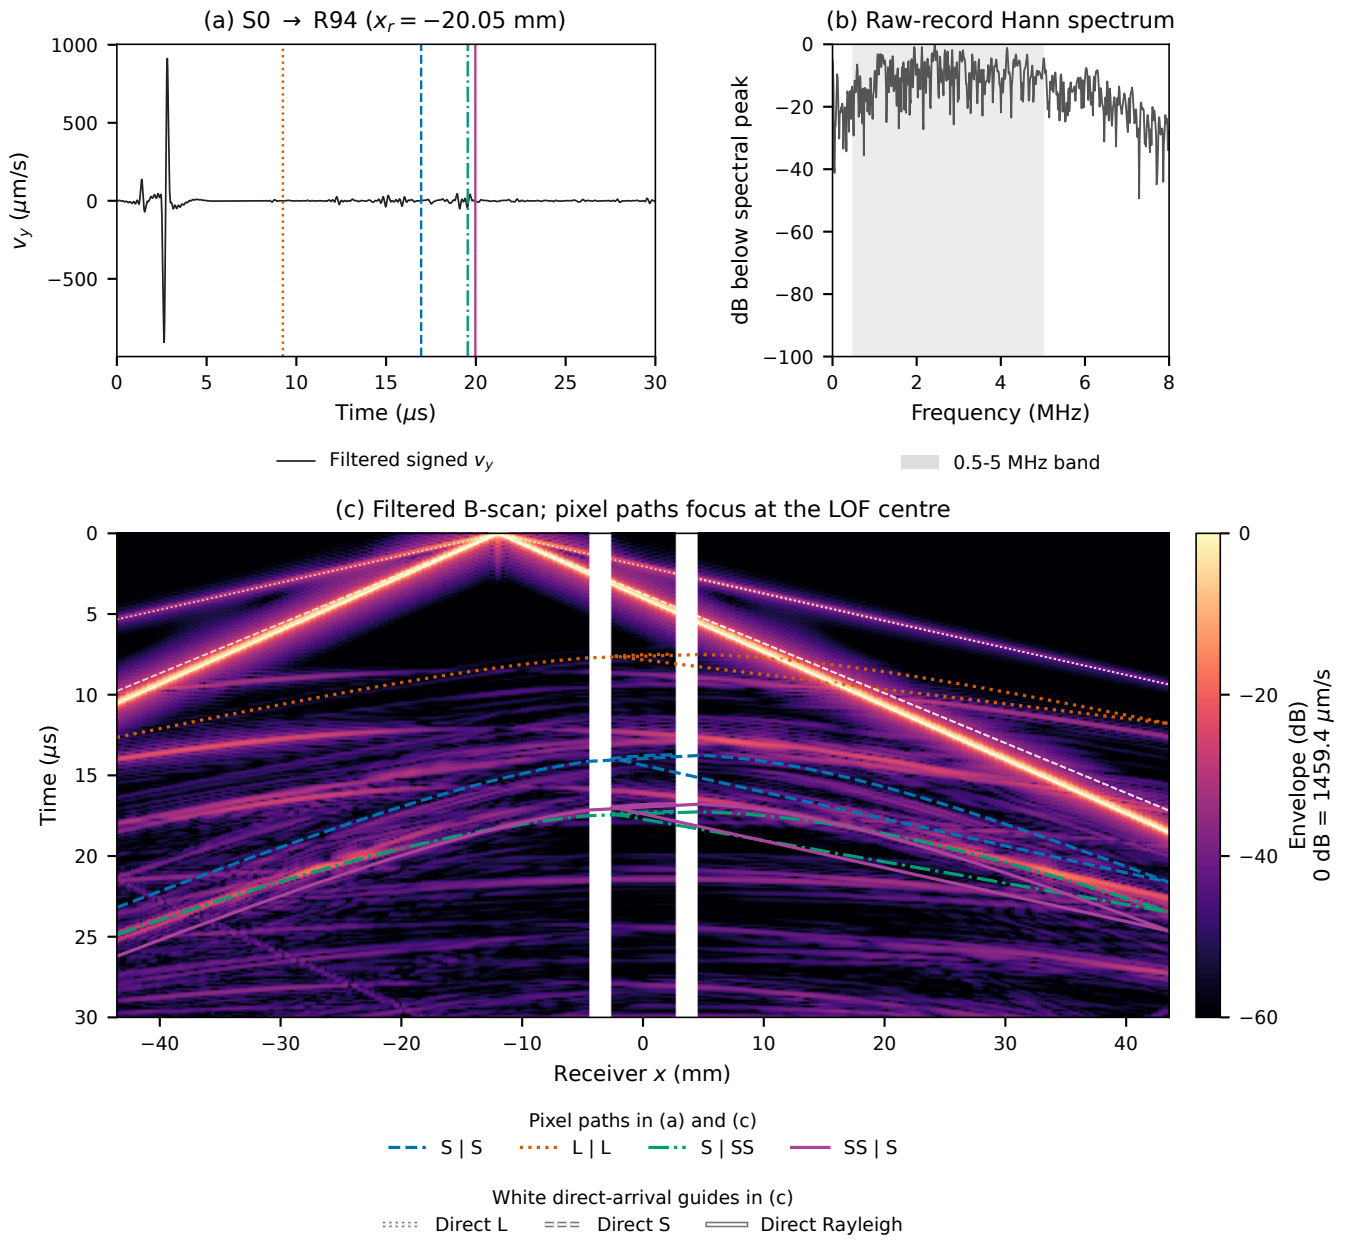

(a) S0 → R94 ($x_r = -20.05$ mm)
v_y (μm/s)
Time (μs)
Filtered signed v_y
(b) Raw-record Hann spectrum
dB below spectral peak
Frequency (MHz)
0.5-5 MHz band
(c) Filtered B-scan; pixel paths focus at the LOF centre
Time (μs)
Receiver x (mm)
Envelope (dB)
0 dB = 1459.4 μm/s
Pixel paths in (a) and (c)
S | S
L | L
S | SS
SS | S
White direct-arrival guides in (c)
Direct L
Direct S
Direct Rayleigh