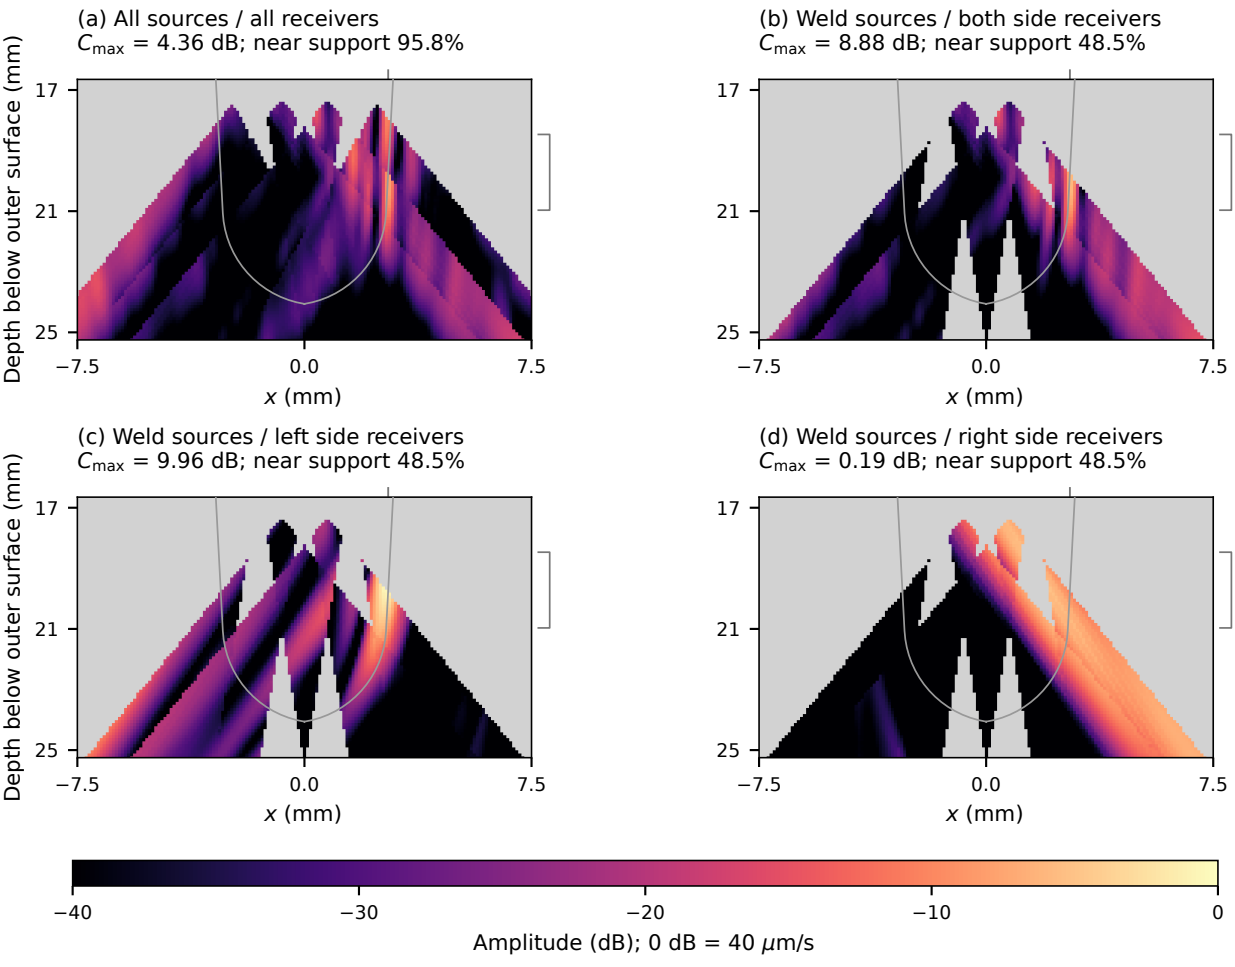

(a) All sources / all receivers
C_{max} = 4.36 dB; near support 95.8%
(b) Weld sources / both side receivers
C_{max} = 8.88 dB; near support 48.5%
(c) Weld sources / left side receivers
C_{max} = 9.96 dB; near support 48.5%
(d) Weld sources / right side receivers
C_{max} = 0.19 dB; near support 48.5%
Depth below outer surface (mm)
17
21
25
−7.5
0.0
7.5
x (mm)
−40
−30
−20
−10
0
Amplitude (dB); 0 dB = 40 μm/s