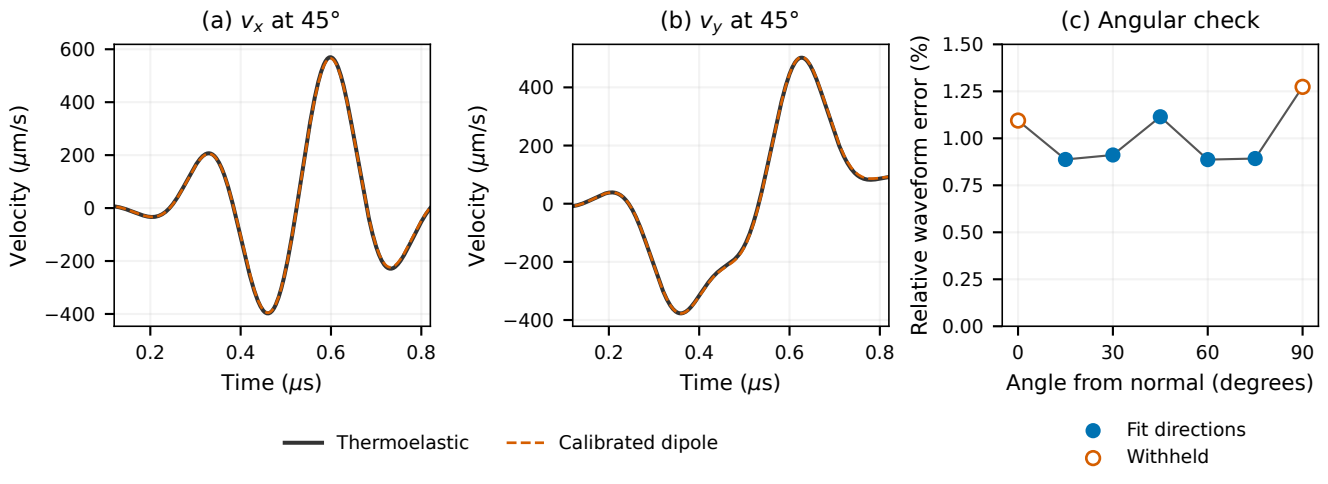
(a) v_x at 45°
(b) v_y at 45°
(c) Angular check
Velocity (μm/s)
Time (μs)
Relative waveform error (%)
Angle from normal (degrees)
Thermoelastic
Calibrated dipole
Fit directions
Withheld