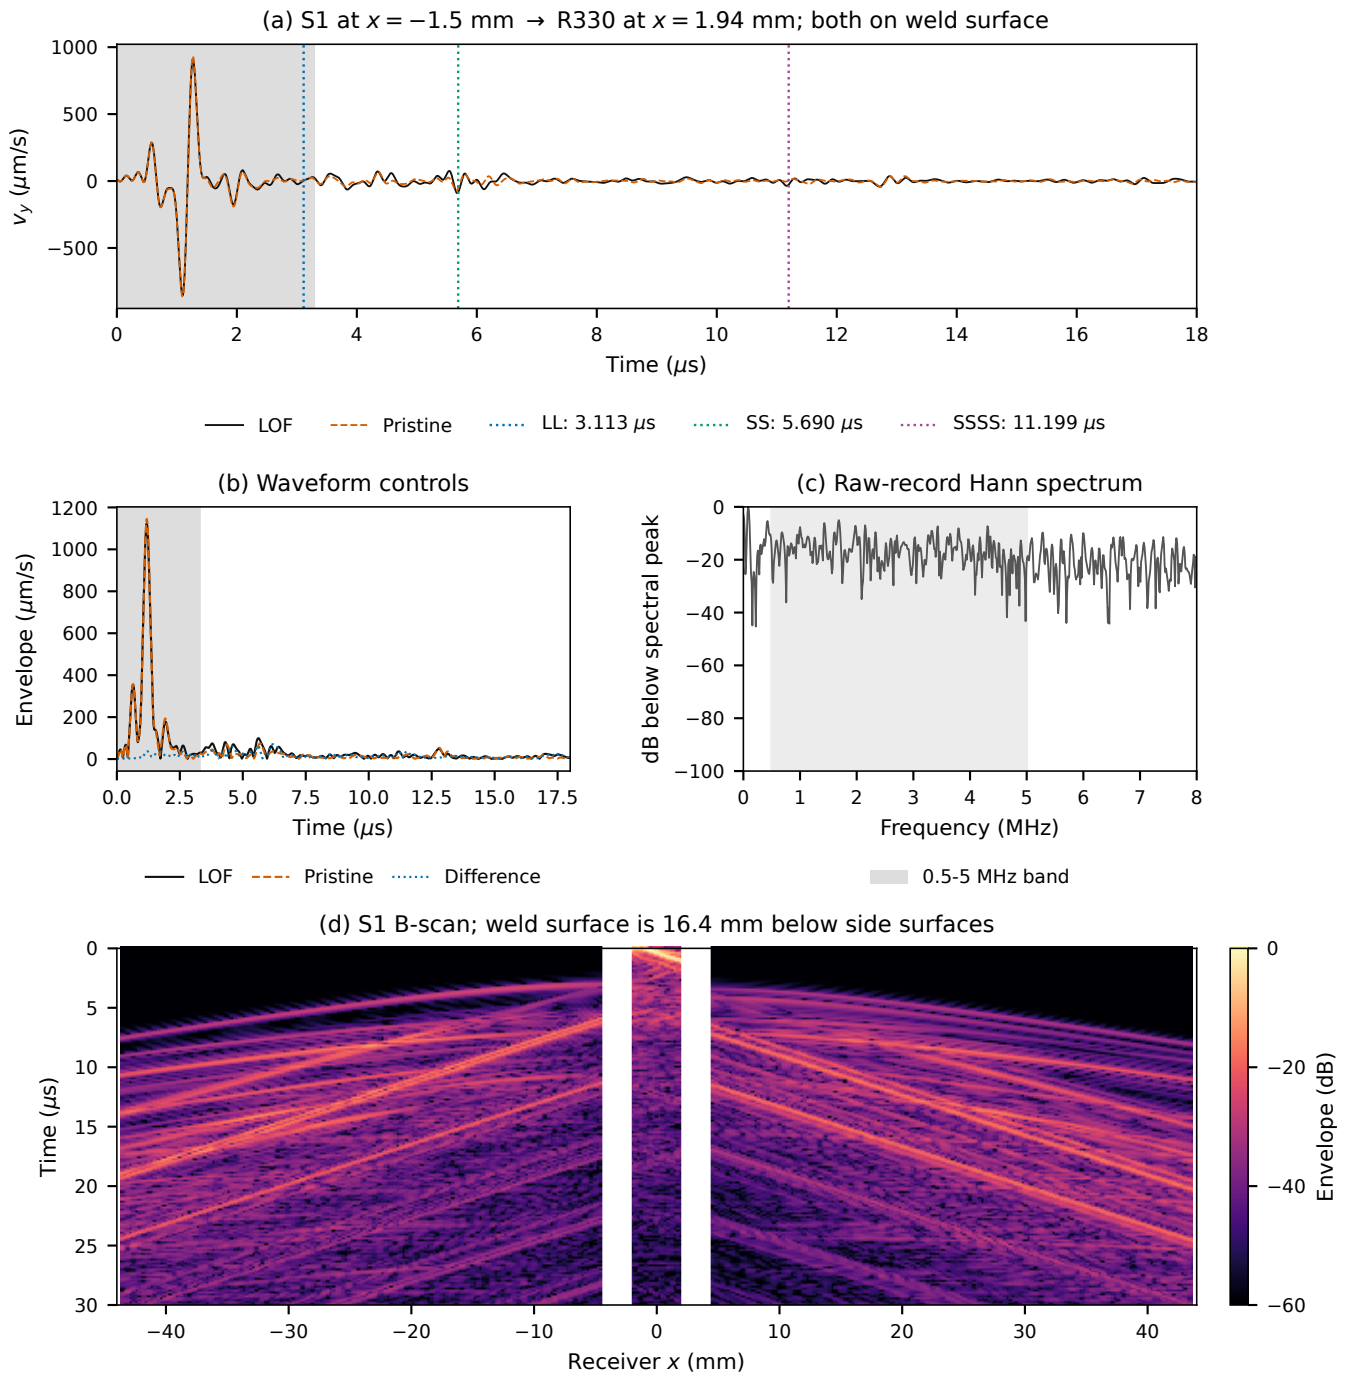

(a) S1 at $x = -1.5$ mm → R330 at $x = 1.94$ mm; both on weld surface
v_y (μm/s)
Time (μs)
LOF
Pristine
LL: 3.113 μs
SS: 5.690 μs
SSSS: 11.199 μs
(b) Waveform controls
Envelope (μm/s)
Time (μs)
LOF
Pristine
Difference
(c) Raw-record Hann spectrum
dB below spectral peak
Frequency (MHz)
0.5-5 MHz band
(d) S1 B-scan; weld surface is 16.4 mm below side surfaces
Time (μs)
Receiver x (mm)
Envelope (dB)