



AMR_GridDeck_C45_D3 - GRID DECK / QUOTATION ONLY

Revision D3 | 2026-09-22 | All dimensions in mm | Quantity 1 | Not released for fabrication or loaded use

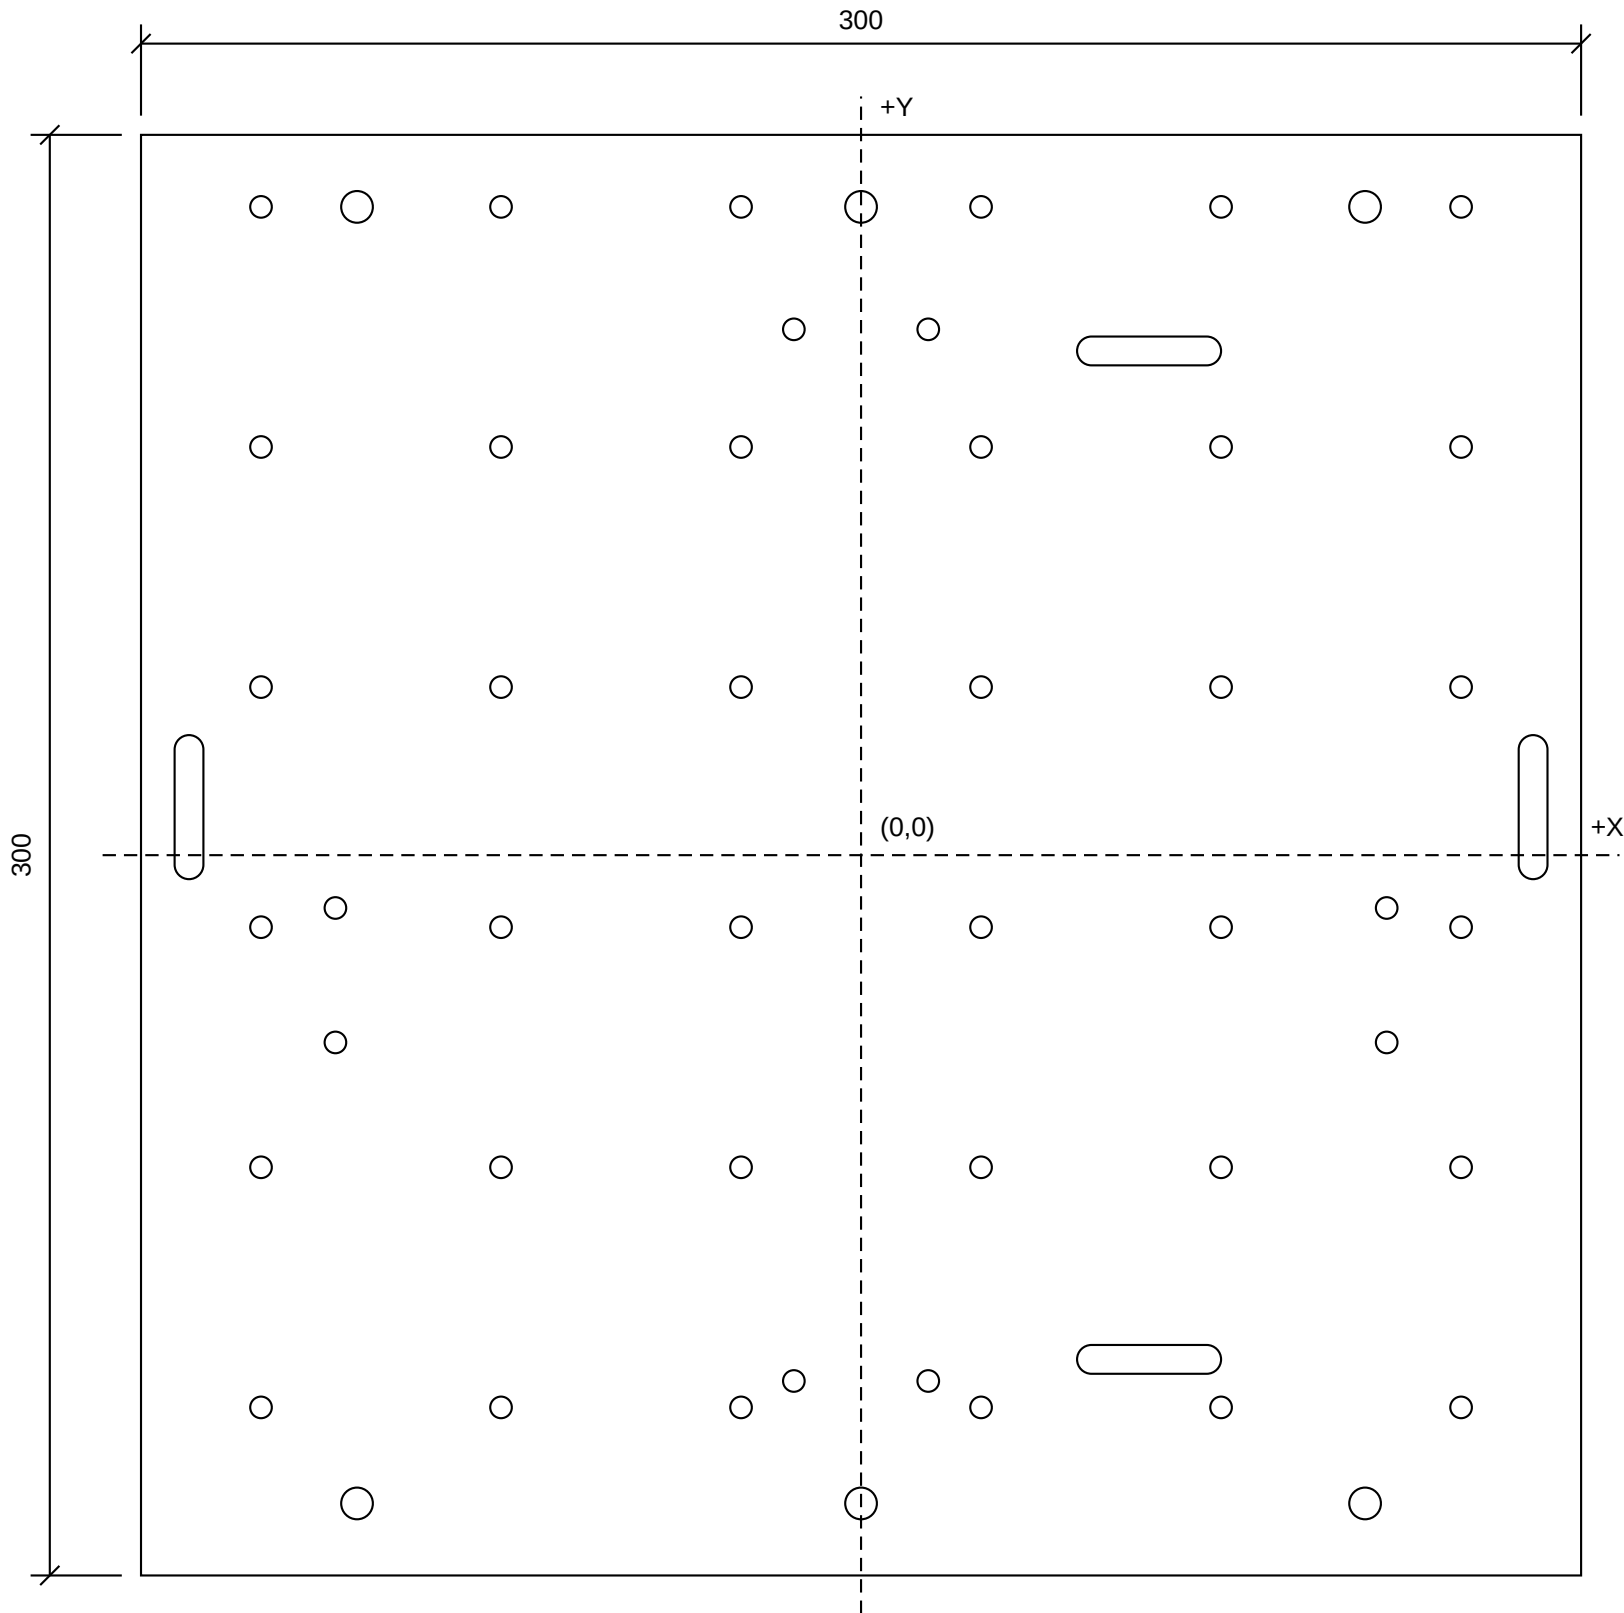

TOP VIEW | Origin at plate centre | 50mm pitch; X edge25, Y first35 / last15 (grid Y offset+10)



SIDE VIEW | Thickness 4 +/-0.10 | All holes/slots through

MATERIAL / FINISH

Aluminum 6061-T6 (JLCCNC Aluminum 6061 selection).
Require Rp0.2 >=240 MPa; confirm material lot / temper.
As machined; no blasting, anodizing or cosmetic finish.
No assembly or inserts. Remove burrs on both faces.
Edge break <=0.2; preserve nominal hole/slot sizes.
Plate flatness <=0.5 over 300. Protect flatness in shipment.

HOLE SCHEDULE - ALL CENTRES FROM (0,0)

GRID: 36 locations, full Cartesian product of:
X = -125, -75, -25, 25, 75, 125
Y = -115, -65, -15, 35, 85, 135

36 x D4.5 +0.2/0 THROUGH. NO THREADS.

FRAME: 6 x D6.6 +0.2/0 THROUGH
X = -105, 0, 105; Y = -135, 135 (all combinations)

STOPS: 8 x D4.5 +0.2/0 THROUGH, unthreaded
X=+/-109.5, Y=-39,-11; and X=+/-14, Y=+/-109.5

STRAPS: 4 x obround slots 30 overall x 6 wide, R3
Centres (+/-140,10), axis Y; (60,+/-105), axis X

TOLERANCES / MODEL PRIORITY

Hole and slot centre coordinates +/-0.10 from origin.
Slot width 6 +0.2/0; length 30 +/-0.2.
Other linear/angular dimensions: ISO 2768-m.
PDF controls threads and tolerances; STEP controls outline.
Do not merge holes or alter geometry without review.

QUOTE SCOPE

Includes material, all 50 round holes and all 4 strap slots.
No mounting hardware. Ship quote to Japan separately.
D3: direct on3030. No support parts or spacers included.