


AMR_LidAngle_D68 / D6.8 / QUOTATION ONLY

2026-09-23 | mm | Quantity 2 | Matching STEP required | Not released for fabrication

SIDE Y-Z:50 x22; foot/upright4 +/-0.10; inside root R3.

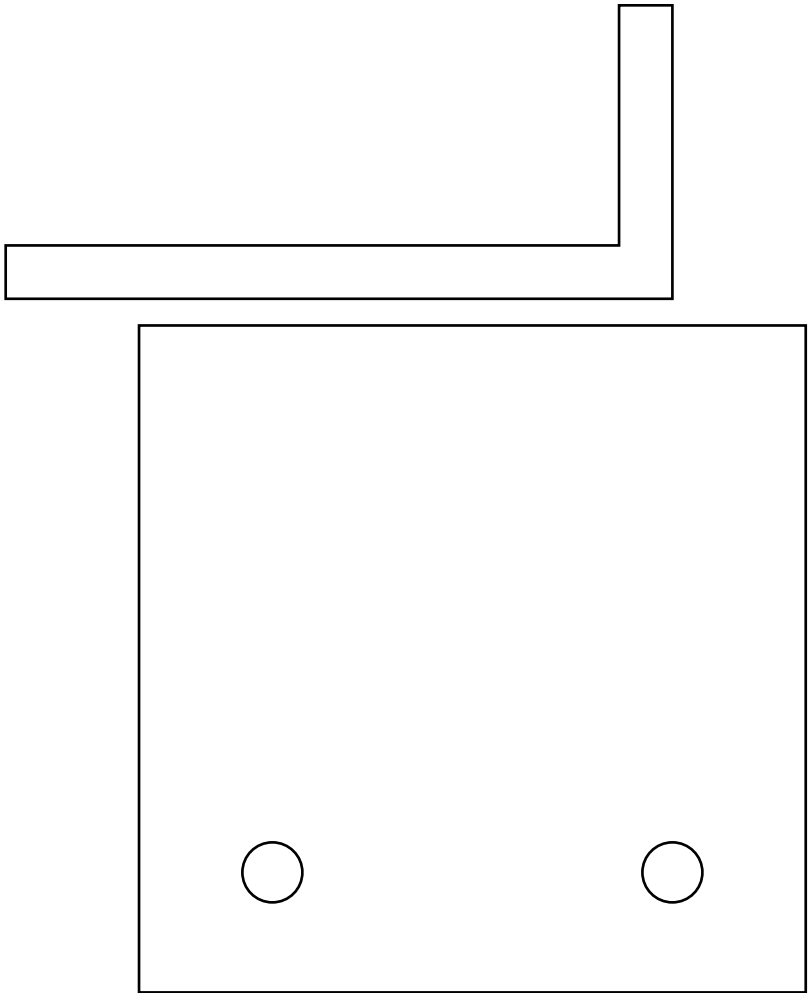

TOP X-Y:50x50, width50; two base holes, no threads.

Aluminum 6061-T6; require Rp0.2 >=240MPa.
As machined. No blasting, anodizing or cosmetic finish.
No threads or inserts. All specified holes are THROUGH.
Deburr both sides. Edge break <=0.2mm.
Hole coordinates +/-0.10mm; D4.5 +0.2/0.
Other dimensions ISO2768-m unless specified.
Do not change dimensions, material, R or holes without review.
STEP SHA256:
b4b467c1241a4a0eb4f270e089accf9c
a11f9a31a81cd5eae1309d6e43b7a40a

One identical part; quantity2, not mirrored.
Overall50(X) x50(Y) x22(Z). Main walls4 +/-0.10.
One inside root R3; other outline per STEP.
4x D4.5 +0.2/0 THROUGH:
2 base bores: X=+/-15,Y=9,axisZ.
2 upright bores: X=+/-15,Z=13,axisY.
Hole centre coords +/-0.10 from exported local origin.
Main mounting faces perpendicular0.2/22.
Main foot and upright seating flatness0.15.
No opening stops, ears or additional flanges.
50mm foot preserves existing cargo belt clearance.
Schematic sharp lines atR3; STEP controls actual radii.
Manual review of machining access/R3 is required.