


AMR_GridDeck_D68 / D6.8 / QUOTATION ONLY

2026-09-23 | mm | Quantity 1 | Matching STEP required | Not released for fabrication

300 x 300; thickness4 +/-0.10

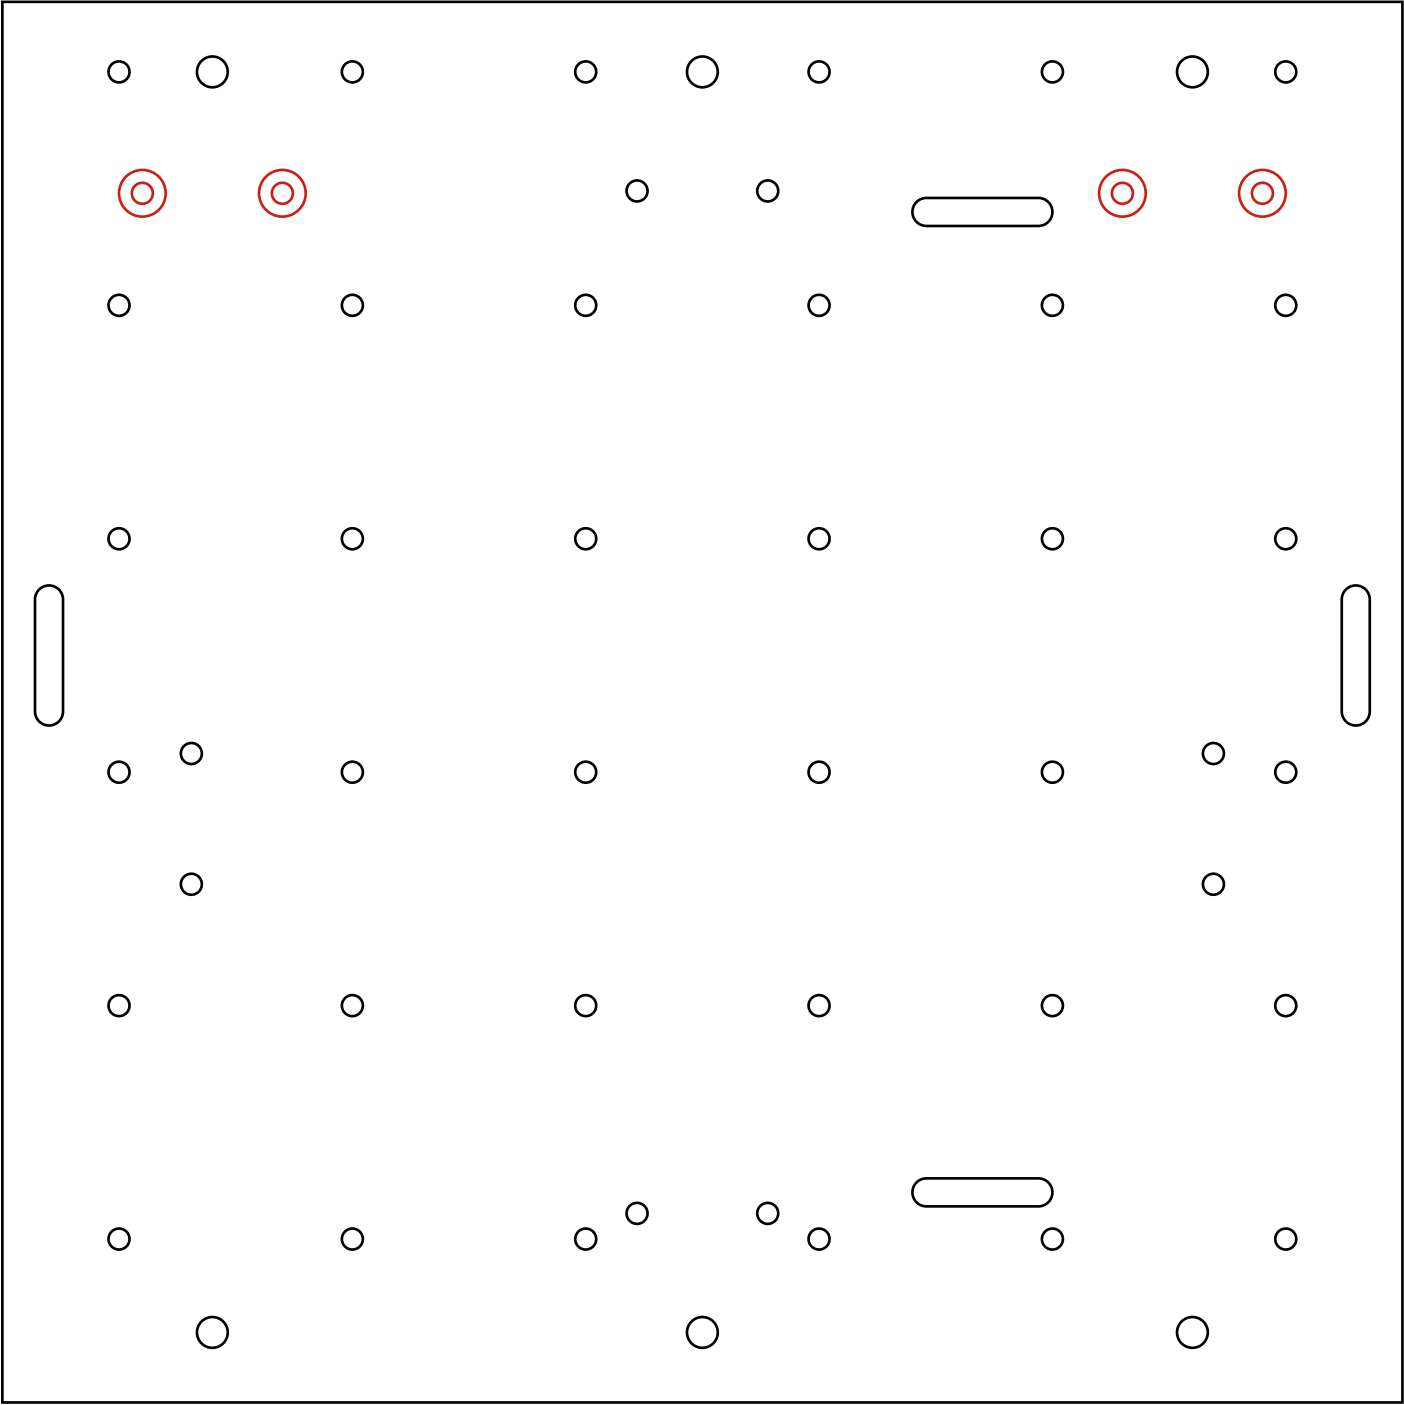

TOP / Origin centre(0,0); red rings mark4 new holes (rings are NOT machined).



SIDE:4 +/-0.10. Flatness<=0.5 over300. Preserve flatness during shipment.

Aluminum 6061-T6; require Rp0.2 >=240MPa.
As machined. No blasting, anodizing or cosmetic finish.
No threads or inserts. All specified holes are THROUGH.
Deburr both sides. Edge break <=0.2mm.
Hole coordinates +/-0.10mm; D4.5 +0.2/0.
Other dimensions ISO2768-m unless specified.
Do not change dimensions, material, R or holes without review.
STEP SHA256:
f00304de17c088257c92abcf596f50c
49d6a75395b6023d93de5facbf8d38f8

36 GRID D4.5: Cartesian product of
X=-125,-75,-25,25,75,125; Y=-115,-65,-15,35,85,135.
6 FRAME D6.6 +0.2/0: X=-105,0,105; Y=+/-135.
8 STOP D4.5: X=+/-109.5,Y=-39,-11;
and X=+/-14,Y=+/-109.5.
4 NEW HINGE D4.5: X=-120,-90,90,120; Y=109.
4 slots30x6 R3: (+/-140,10) alongY;
(60,+/-105) alongX. Length30+/-0.2,width6+0.2/0.
Same D3 plate outline/grid, with ONLY4 new plain holes.
Keep holes separate; no tapping; quantity1.