



AMR_GridDeck_T4_Q1 - GRID DECK / QUOTATION ONLY

Revision Q1 | 2026-09-21 | All dimensions in mm | Quantity 1 | Not released for fabrication or loaded use

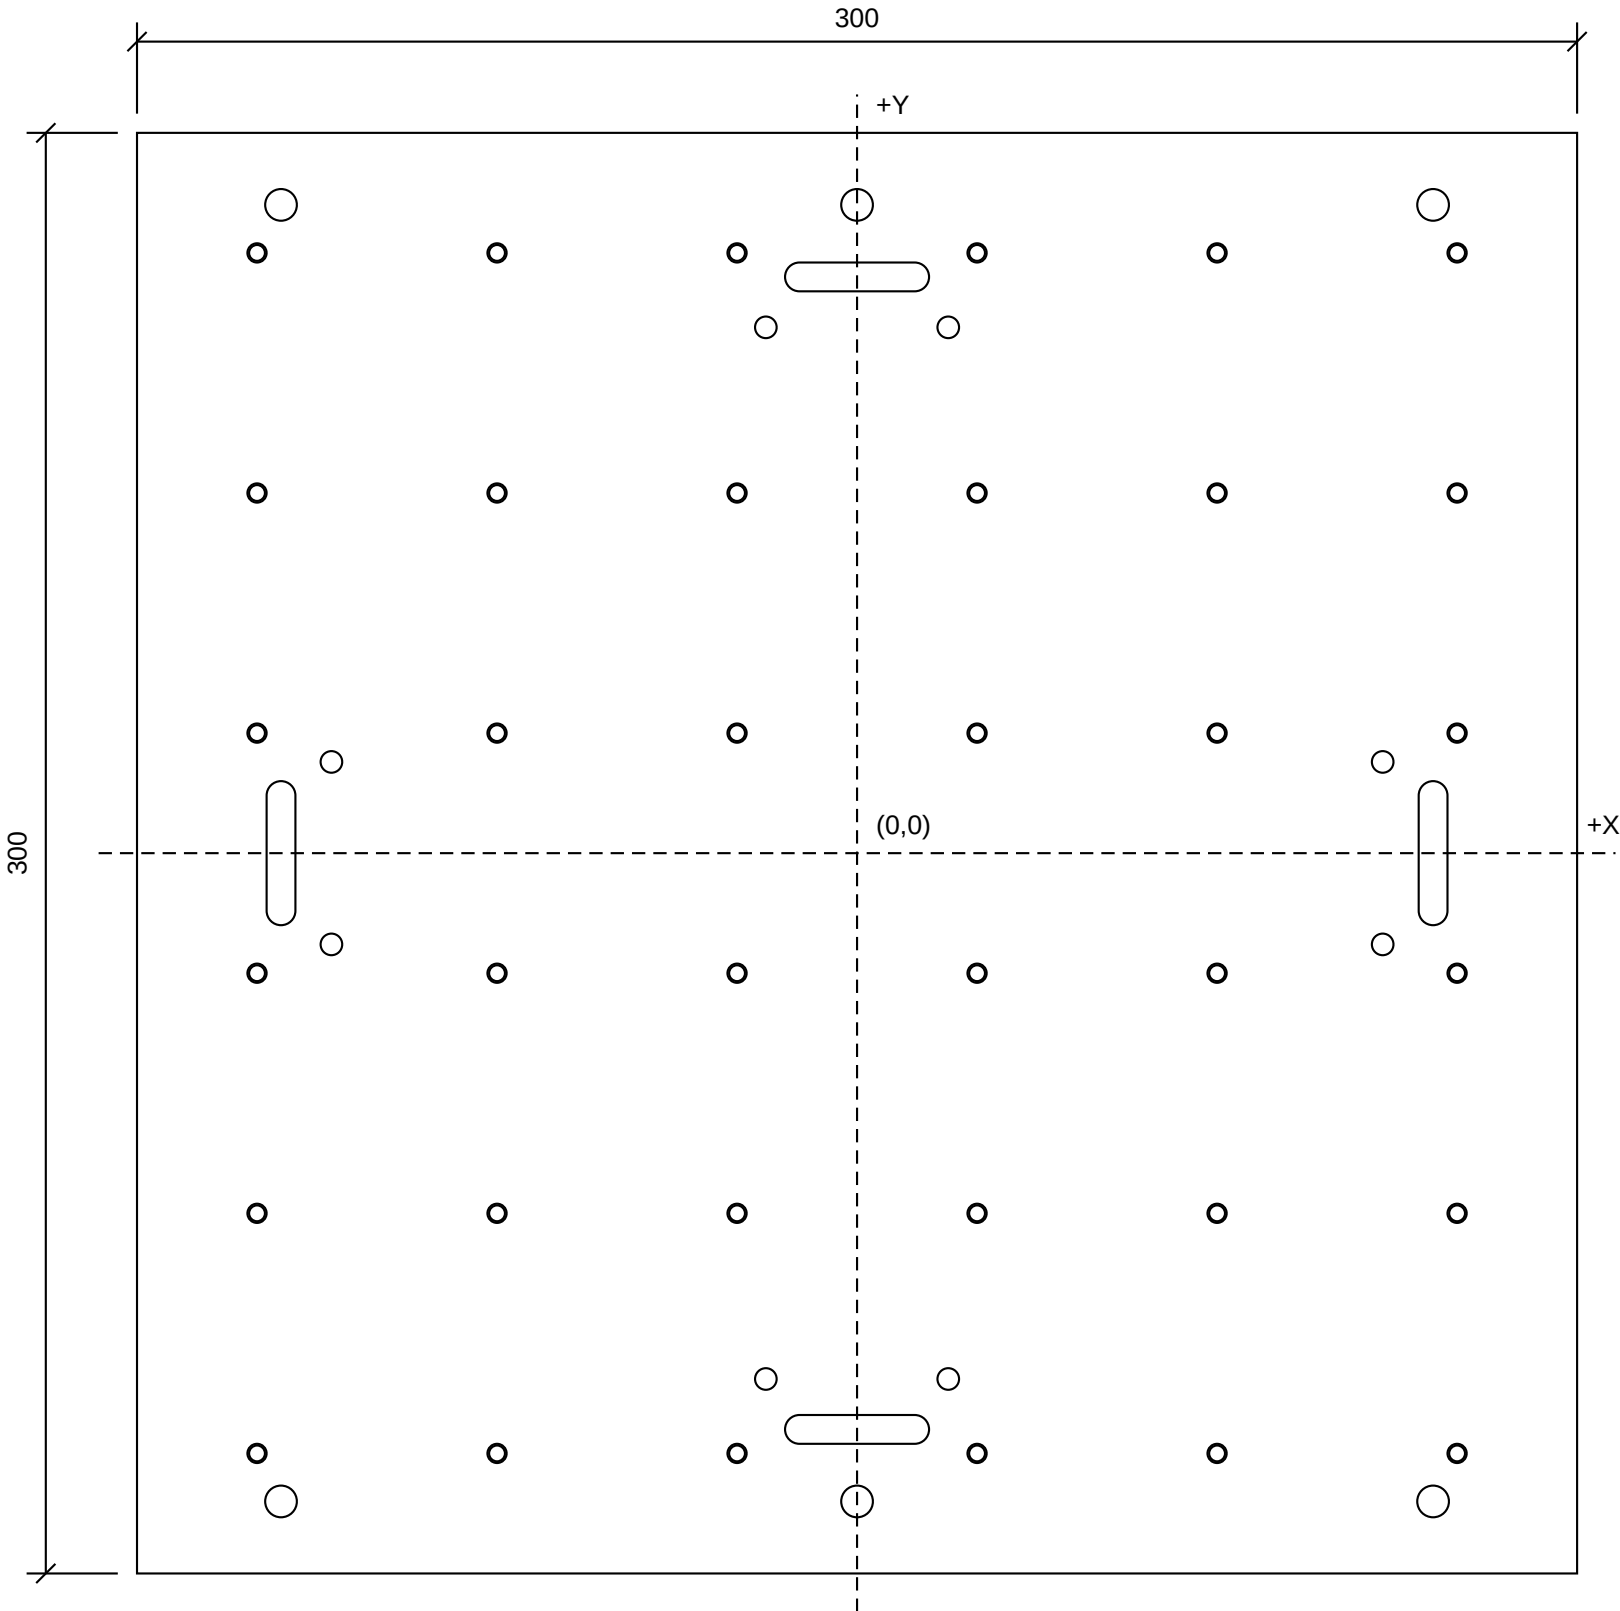

TOP VIEW | Origin at plate centre | Grid edge offset 25, pitch 50 (both axes)



SIDE VIEW | Thickness 4 +/-0.10 | All holes/slots through

MATERIAL / FINISH

Aluminum 6061-T6 (JLCCNC Aluminum 6061 selection).
As machined; no blasting, anodizing or cosmetic finish.
No assembly or inserts. Remove burrs on both faces.
Edge break <=0.2; no large chamfers on M4 threads.
Plate flatness <=0.5 over 300. Protect flatness in shipment.

HOLE SCHEDULE - ALL CENTRES FROM (0,0)

GRID: 36 locations, full Cartesian product of:
X = -125, -75, -25, 25, 75, 125
Y = -125, -75, -25, 25, 75, 125

36 x M4x0.7-6H THROUGH, full available depth.

STEP shows D3.3 pilot bores; finished threads per PDF.
Thread all 36 grid bores. Remaining 14 holes unthreaded.

FRAME: 6 x D6.6 +0.2/0 THROUGH

X = -120, 0, 120; Y = -135, 135 (all combinations)

STOPS: 8 x D4.5 +0.2/0 THROUGH, unthreaded
(X,Y) = (+/-109.5, +/-19) and (+/-19, +/-109.5)

STRAPS: 4 x obround slots 30 overall x 6 wide, R3
Centres (+/-120,0), long axis Y; (0,+/-120), long axis X

TOLERANCES / MODEL PRIORITY

Hole and slot centre coordinates +/-0.10 from origin.
Slot width 6 +0.2/0; length 30 +/-0.2.
Other linear/angular dimensions: ISO 2768-m.
PDF controls threads and tolerances; STEP controls outline.
Do not merge holes or alter geometry without review.

QUOTE SCOPE

Includes material, all 50 round holes and all 4 strap slots.
No mounting hardware. Ship quote to Japan separately.
Quote candidate only: accessory clearance / strength pending.