



GRANDE FLOOR CEILING R-410A 60HZ
INVERTER 16 SEER
YFJE(18-55)BZJ

Indoor Unit

- Ceiling and Wall Installation Option
- Automatic Up and Down Air Swing
- Low noise
- Washable air filter
- High velocity air flow
- Auto Random Restart
- 2-way Drainage
- Follow me function
- Universal Spare Parts make maintenance much easier
- Fresh air intake (Optional)
- Drain pump (Optional)
- Wired controller (Optional)

Remote Control

- 5 operation modes: Auto, Cool, Dry, Heat, Fan only
- Multi-speed fan setting: High/Medium/Low/Auto
- 24-hour timer setting
- Turbo cool setting
- Background light LCD display
- Real-time clock display

Condensing Unit

- Compact size
- More sturdy and durable
- High efficiency compressor
- Low noise
- 3-minute protection
- Valve protection
- Easier installation
- Easier maintenance
- Universal design



The YORK® line of Floor ceiling Air Conditioners includes a wide range of sizes to meet many customers' needs. Each model is designed to provide comfort and efficiency, in an easy-to-operate unit and flexible installation makes them an easy fit for a variety of applications. Models meet the highest energy efficiency ratings, so less energy is consumed without sacrificing comfort and performance. Both the condensing and indoor units are engineered for quiet operation. And comfort control settings are easily changed with the touch of a button on the remote control.

Features and benefits



Multi-Speed Fan

Multi-speed fan helps satisfy various airflow requirements.



3-Minute Protection

A 3-minute delay before the compressor will restart helps avoid compressor damage and work time.



24-Hour Timer

Allows programmed start times up to 24 hours in advance for flexible and more convenient operation.



4-Way Airflow

Front air deflectors are adjustable for horizontal or vertical airflow. Airflow can be directed to air condition the whole room or even a particular point providing for better comfort.



DC Inverter Compressor

DC inverter compressor provides more comfortable indoor environment, higher performance in partial load and better heating performance in low ambient temperature than fixed compressor.



Washable Filter

Washable filter allows for convenient service and maintenance.



Auto Restart

Unit is automatically returned to previous operating conditions after a power outage, for simplified operation.




Self Diagnosis

Clearly displayed failure codes allow for quicker troubleshooting and easier maintenance.



Low Ambient Cooling at -15°C

The AC will run in cooling mode when outdoor temperature is below -15°C to meet special user-requested applications.

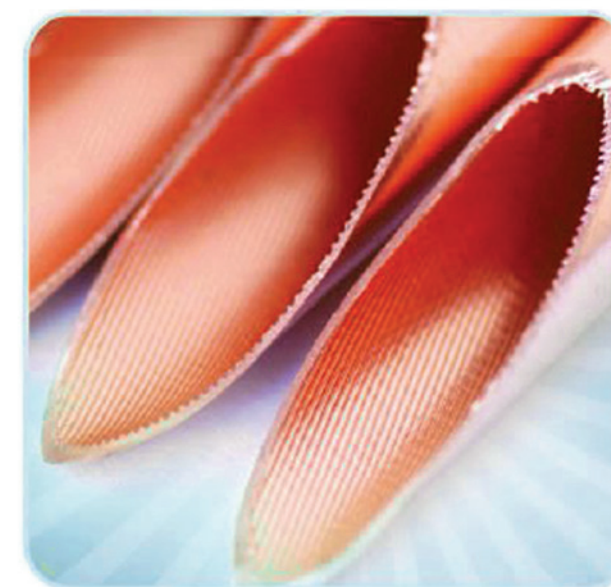

Inner Groove Copper Tube

Inner groove copper tubing allows more refrigerant to pass through, improving heat exchange by 30 to 50% when compared to traditional copper tubing, and lowering power consumption while keeping output capacity at the same level.

Specification

| York Set Model | | | YFJE18BZJ6AMORX | YFJE24BZJ6AMORX | YFJE36BZJ6AMORX | YFJE48BZJ6AMORX | YFJE55BZJ6AMORX |
|---|----------------------------|----------------------|--------------------------|-----------------------------|------------------------------|--------------------------------|--------------------------------|
| York Indoor Model | | | YFJE18BXJ6AM-RX | YFJE24BXJ6AM-RX | YFJE36BXJ6AM-RX | YFJE48BXJ6AM-RX | YFJE55BXJ6AM-RX |
| York Outdoor Model | | | YUJE18BYJ6AMO-X | YUJE24BYJ6AMO-X | YUJE36BYJ6AMO-X | YUJE48BYJ6AMO-X | YUJE55BYJ6AMO-X |
| Power supply | | V-ph-Hz | 208-230-1-60 | 208-230-1-60 | 208-230-1-60 | 208-230-1-60 | 208-230-1-60 |
| Cooling | Capacity | Btu/h | 18000 | 24000 | 36000 | 48000 | 54000 |
| | Power input | W | 1440 | 1920 | 4500 | 5161 | 5427 |
| | EER | Btu/W | 12.5 | 12.5 | 8.0 | 9.3 | 9.95 |
| | SEER | | 20 | 20 | 16 | 17.8 | 18.7 |
| Minimum circuit ampacity | | A | 15 | 18 | 30 | 35 | 36 |
| Max.fuse | | A | 20 | 25 | 50 | 50 | 50 |
| Indoor fan motor | Qty | | 1 | 1 | 1 | 2 | 2 |
| | Input | W | 55 | 55 | 115 | 90 | 90 |
| | RLA | A | 1.5 | 2 | 1.5 | 1.8 | 1.8 |
| | Speed(Hi/Med/Lo) | r/min | 950/850/750 | 1350/1260/1120 | 1300/1150/800 | 1320/1200/1120 | 1320/1200/1120 |
| Indoor air flow(Hi/Med/Lo) | | m³/h(CFM) | 982/885/790(578/521/465) | 1290/1204/1017(759/708/598) | 1762/1559/1084(1037/917/638) | 2300/1900/1700(1350/1120/1000) | 2300/1900/1700(1350/1120/1000) |
| Indoor noise level (sound pressure) (Hi/Mid/Lo) | | dB(A) | 47/44/39 | 53/48/42 | 54/49/43 | 57/54/52 | 57/54/52 |
| Indoor unit | Dimension (WxDxH) | mm | 1068x675x235 | 1068x675x235 | 1285x675x235 | 1650x675x235 | 1650x675x235 |
| | Dimension (WxDxH) | inch | 42.05x26.57x9.25 | 42.05x26.57x9.25 | 50.59x26.57x9.25 | 64.96x26.57x9.25 | 64.96x26.57x9.25 |
| | Packing (WxDxH) | mm | 1145x755x313 | 1145x755x313 | 1360x755x313 | 1725x755x313 | 1725x755x313 |
| | Packing (WxDxH) | inch | 45.08x29.72x12.32 | 45.08x29.72x12.32 | 53.54x29.72x12.32 | 67.91x29.72x12.32 | 67.91x29.72x12.32 |
| | Net/Gross weight | kg | 25/29.7 | 26.5/31.4 | 31.3/37 | 38/44 | 38/44 |
| Design pressure | | PSIG | 550/340 PSIG | 550/340 PSIG | 550/340 PSIG | 550/340 PSIG | 550/340 PSIG |
| Drainage water pipe diameter | | mm | ODØ25 | ODØ25 | ODØ25 | ODØ25 | ODØ25 |
| Refrigerant piping | | Liquid side/Gas side | mm(inch) | Ø6.35/Ø12.7(1/4"/1/2") | Ø9.52/Ø15.9(3/8"/5/8") | Ø9.52/Ø15.9(3/8"/5/8") | Ø9.52/Ø15.9(3/8"/5/8") |
| Controller | | | Remote control | Remote control | Remote control | Remote control | Remote control |
| Room temperature | | Cooling | °C/°F | 17~32/62~90 | | | |
| Operation temperature | | | °C/°F | 17~30/62~86 | | | |
| Compressor | Type | | ROTARY | ROTARY | ROTARY | ROTARY | ROTARY |
| | Capacity | Btu/h | 13836 | 24345 | 32823 | 44697 | 44697 |
| | Input | W | 1035 | 1970 | 2570 | 3420 | 3420 |
| | Rated current (RLA) | A | 10.50 | 12.00 | 22.00 | 23.5 | 23.5 |
| | Thermal protector position | | INTERNAL | EXTERNAL | EXTERNAL | INTERNAL | INTERNAL |
| | Refrigerant oil | ml | ESTER OIL VG74/450 | POE(VG74)/670 | ESTER OIL VG74/1000 | Ester Oil VG74/1400 | Ester Oil VG74/1400 |
| Outdoor fan motor | Qty | | 1 | 1 | 1 | 2 | 2 |
| | Input | W | 50(Output) | 120(Output) | 120(Output) | 85(Output) | 85(Output) |
| | RLA | A | 0.60 | 0.6 | 1.0 | 0.39 | 0.39 |
| | Speed | r/min | 810 | 810 | 950 | 900 | 900 |
| Outdoor air flow (Max.) | | m³/h | 2500 | 4000 | 4300 | 7600 | 7600 |
| Outdoor air flow (Max.) | | CFM | 1470 | 2354 | 2530 | 4470 | 4470 |
| Outdoor noise level | | dB(A) | 60 | 61 | 66 | 62.5 | 62.5 |
| Throttle type | | | Capillary +EXV | Capillary +EXV | Capillary +EXV | Capillary +EXV | Capillary +EXV |
| Outdoor unit | Dimension (W×D×H) | mm | 845x363x702 | 946x410x810 | 946x410x810 | 952x415x1333 | 952x415x1333 |
| | | inch | 33.27x14.29x27.64 | 37.24x16.14x31.89 | 37.24x16.14x31.89 | 37.48x16.34x52.48 | 37.48x16.34x52.48 |
| | Packing (W×D×H) | mm | 965x395x755 | 1090x500x875 | 1090x500x875 | 1095x495x1480 | 1095x495x1480 |
| | | inch | 37.99x15.55x29.72 | 42.91x19.69x34.45 | 42.91x19.69x34.45 | 43.11x19.49x58.27 | 43.11x19.49x58.27 |
| | Net/ Gross weight | kg | 43.2/46.5 | 62/67.4 | 67.4/73 | 98.6/111.6 | 98.6/111.6 |
| Refrigerant type/Quantity | | Type/Charged volume | Oz | R410A/68.8 | R410A/82.9 | R410A/108 | R410A/148.2 |
| Refrigerant precharge | | ft | 25 | 25 | 25 | 25 | 25 |
| Additional charge for each ft | | oz | 0.16 | 0.32 | 0.32 | 0.32 | 0.32 |
| Design pressure | | PSIG | 550/340 | 550/340 | 550/340 | 550/340 | 550/340 |
| Refrigerant piping | Liquid side/ Gas side | mm(inch) | Ø6.35/Ø12.7(1/4"/1/2") | Ø9.52/Ø15.9(3/8"/5/8") | Ø9.52/Ø15.9(3/8"/5/8") | Ø9.52/Ø15.9(3/8"/5/8") | Ø9.52/Ø15.9(3/8"/5/8") |
| | Max. pipe length | m/ft | 30/98 | 50/164 | 65/213 | 65/213 | 65/213 |
| | Max. difference in level | m/ft | 20/66 | 25/82 | 30/98 | 30/98 | 30/98 |
| Ambient temperature | | Cooling | °C/°F | -25~50/-13~122 | -25~50/-13~122 | -15~50/5~122 | -15~50/5~122 |
| Qty'per 20' /40' /40'HQ | | Indoor | 102/220/252 | 102/220/252 | 92/188/213 | 72/147/167 | 72/147/167 |
| Qty'per 20' /40' /40'HQ | | Outdoor | 92/188/213 | 72/147/167 | 44/96/144 | 22/46/46 | 22/46/46 |

Nominal testing conditions:

Cooling - Indoor 80.6°F DB / 66.2°F WB (27°C DB / 19°C WB) & Outdoor 95°F DB / 75.2°F WB (35°C DB / 24°C WB)

Heating - Indoor 68°F DB / 59°F WB (20°C DB / 15°C WB) & Outdoor 44.6°F DB / 42.8°F WB (7°C DB / 6°C WB)



INSTALL CONFIDENCE.

Johnson Controls, the Johnson Controls logo, YORK are registered trademarks of Johnson Controls, Inc in the United States of America and other countries. Other trademarks used herein may be trademarks or registered trademarks of other companies.

FOR MORE INFORMATION CONTACT JOHNSONCONTROLS.COM

© 2017 Johnson Controls, Inc, P.O. Box 423, Milwaukee, WI 53201, All rights reserved worldwide.

SFJE(18-55)BZJ-170714