


Signaloid SD-Dev QuickStart Guide




Package includes:

- 1x Signaloid SD-Dev
- 1x Signaloid C0-microSD
- 1x Signaloid C0-microSD pinout sticker

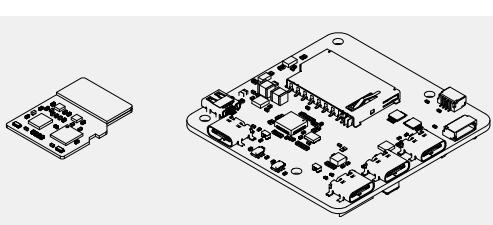

Board features


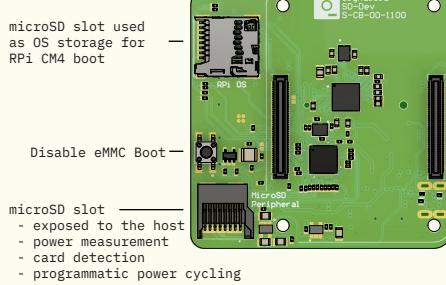


- full size SD slot
 - exposed to the host
 - power measurement
 - card detection
 - programmatic power cycling


mezzanine connectors for Raspberry Pi CM4




① Connect a microSD or full-size SD card to your SD-Dev.

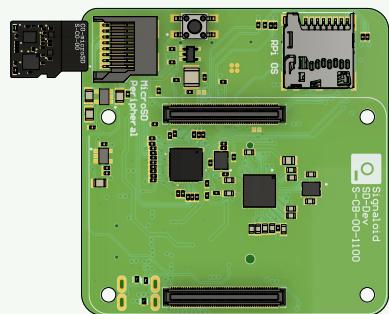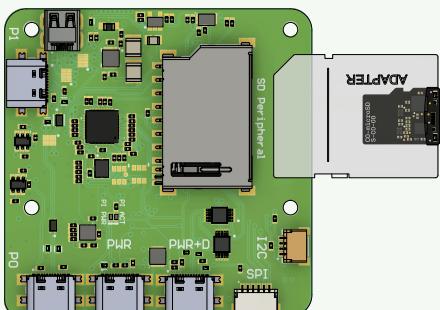

② Connect the SD-Dev to your computer.

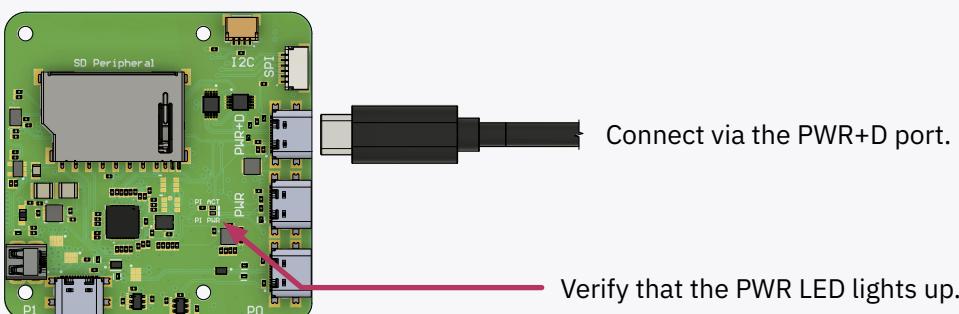

③ Optionally, add a Raspberry Pi CM4 to your SD-Dev.

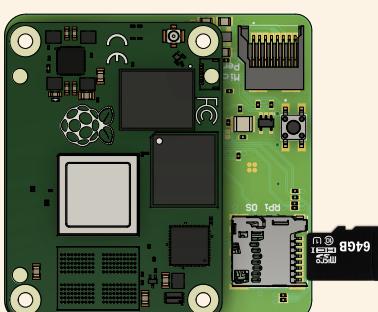

Power the device via the PWR port.

Use this microSD port for the Raspberry Pi OS.

