

Design specification

AquaElevate


Dead fish handling

Operational systems - ScaleAQ

January 29, 2026



Dødfiskhåndtering fra merd til ensilasje

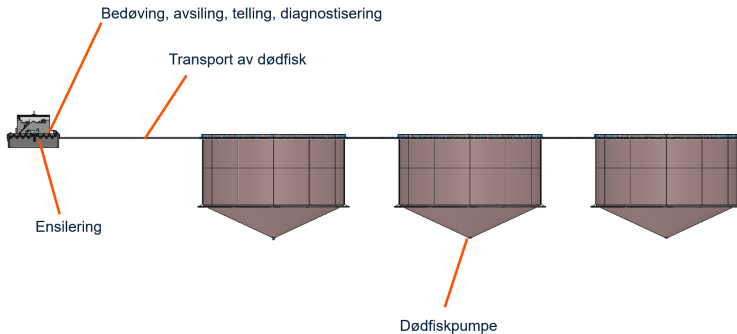


System overview

1. Dead fish are gathered at the bottom of the pen.



System overview

1. Dead fish are gathered at the bottom of the pen.
2. The fish flows through a GRP pipe from the pen and up to the LiftUp unit.

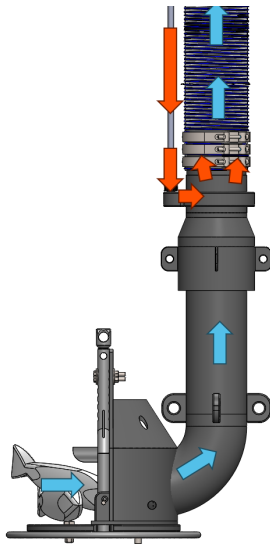


System overview

1. Dead fish are gathered at the bottom of the pen.
2. The fish flows through a GRP pipe from the pen and up to the LiftUp unit.
3. Stunner unit (state mandatory)




System overview

1. Dead fish are gathered at the bottom of the pen.
2. The fish flows through a GRP pipe from the pen and up to the LiftUp unit.
3. Stunner unit (state mandatory)
4. It then moves through the liftup-unit by means of gravity and a VSD controlled conveyor belt




System overview

1. Dead fish are gathered at the bottom of the pen.
2. The fish flows through a GRP pipe from the pen and up to the LiftUp unit.
3. Stunner unit (state mandatory)
4. It then moves through the liftup-unit by means of gravity and a VSD controlled conveyor belt
5. Flushing system




System overview

1. Dead fish are gathered at the bottom of the pen.
2. The fish flows through a GRP pipe from the pen and up to the LiftUp unit.
3. Stunner unit (state mandatory)
4. It then moves through the liftup-unit by means of gravity and a VSD controlled conveyor belt
5. Flushing system
6. Camera unit / vision system




System overview

1. Dead fish are gathered at the bottom of the pen.
2. The fish flows through a GRP pipe from the pen and up to the LiftUp unit.
3. Stunner unit (state mandatory)
4. It then moves through the liftup-unit by means of gravity and a VSD controlled conveyor belt
5. Flushing system
6. Camera unit / vision system
7. Distance sensor




System overview

1. Dead fish are gathered at the bottom of the pen.
2. The fish flows through a GRP pipe from the pen and up to the LiftUp unit.
3. Stunner unit (state mandatory)
4. It then moves through the liftup-unit by means of gravity and a VSD controlled conveyor belt
5. Flushing system
6. Camera unit / vision system
7. Distance sensor
8. Moves through a pre-grinder




System overview

1. Dead fish are gathered at the bottom of the pen.
2. The fish flows through a GRP pipe from the pen and up to the LiftUp unit.
3. Stunner unit (state mandatory)
4. It then moves through the liftup-unit by means of gravity and a VSD controlled conveyor belt
5. Flushing system
6. Camera unit / vision system
7. Distance sensor
8. Moves through a pre-grinder
9. Stored in tanks and continuously circulated/grinded in the ensilage system.



System overview

1. Dead fish are gathered at the bottom of the pen.
2. The fish flows through a GRP pipe from the pen and up to the LiftUp unit.
3. Stunner unit (state mandatory)
4. It then moves through the liftup-unit by means of gravity and a VSD controlled conveyor belt
5. Flushing system
6. Camera unit / vision system
7. Distance sensor
8. Moves through a pre-grinder
9. Stored in tanks and continuously circulated/grinded in the ensilage system.
10. Automatic handling of acid dosing



Compressor

1. Will be continuously running in subsea applications. Will only run when dead fish system is active on other pens.
4. Has its own local user interface with configuration and setting possibilities.



Compressor

1. Will be continuously running in subsea applications. Will only run when dead fish system is active on other pens.
2. Responsibilities are delivering air to
4. Has its own local user interface with configuration and setting possibilities.



Compressor

1. Will be continuously running in subsea applications. Will only run when dead fish system is active on other pens.
2. Responsibilities are delivering air to
 - ▶ a buffer tank used for refilling the air domes in the subsea pens.
4. Has its own local user interface with configuration and setting possibilities.



Compressor

1. Will be continuously running in subsea applications. Will only run when dead fish system is active on other pens.
2. Responsibilities are delivering air to
 - ▶ a buffer tank used for refilling the air domes in the subsea pens.
 - ▶ the air pump at the bottom of the pens for collecting dead fish.
4. Has its own local user interface with configuration and setting possibilities.



Compressor

1. Will be continuously running in subsea applications. Will only run when dead fish system is active on other pens.
2. Responsibilities are delivering air to
 - ▶ a buffer tank used for refilling the air domes in the subsea pens.
 - ▶ the air pump at the bottom of the pens for collecting dead fish.
3. Controlled and monitored in the ensilage PLC by hardwired (+24VDC) signals.
4. Has its own local user interface with configuration and setting possibilities.



LiftUp unit

1. Consists of different subsystems.



LiftUp unit

1. Consists of different subsystems.

- ▶ Stunner



LiftUp unit

1. Consists of different subsystems.

- ▶ Stunner
- ▶ Flusher



LiftUp unit

1. Consists of different subsystems.

- ▶ Stunner
- ▶ Flusher
- ▶ Pen selector control



LiftUp unit

1. Consists of different subsystems.

- ▶ Stunner
- ▶ Flusher
- ▶ Pen selector control
- ▶ Conveyor belt



LiftUp unit

1. Consists of different subsystems.
 - ▶ Stunner
 - ▶ Flusher
 - ▶ Pen selector control
 - ▶ Conveyor belt
 - ▶ Camera diagnostic unit



LiftUp unit

1. Consists of different subsystems.
 - ▶ Stunner
 - ▶ Flusher
 - ▶ Pen selector control
 - ▶ Conveyor belt
 - ▶ Camera diagnostic unit
2. All components connected to Framo's local PLC on the unit.




LiftUp unit

1. Consists of different subsystems.
 - ▶ Stunner
 - ▶ Flusher
 - ▶ Pen selector control
 - ▶ Conveyor belt
 - ▶ Camera diagnostic unit
2. All components connected to Framo's local PLC on the unit.
3. Modbus TCP/IP interface to the local PLC for monitoring and control.




LiftUp unit

1. Consists of different subsystems.
 - ▶ Stunner
 - ▶ Flusher
 - ▶ Pen selector control
 - ▶ Conveyor belt
 - ▶ Camera diagnostic unit
2. All components connected to Framo's local PLC on the unit.
3. Modbus TCP/IP interface to the local PLC for monitoring and control.
4. Local user interface

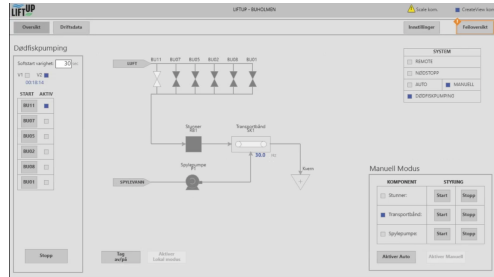


Ensilage unit

1. Consists of two different PLC's.




Ensilage unit

1. Consists of two different PLC's.
 - ▶ Ensilage PLC. Responsible for reading different tank levels, valve- and pump control.




Ensilage unit

1. Consists of two different PLC's.
 - ▶ Ensilage PLC. Responsible for reading different tank levels, valve- and pump control.
 - ▶ Acid dosing PLC. Responsible for dosing the correct amount of acid in the grinder tank.




Ensilage unit

1. Consists of two different PLC's.
 - ▶ Ensilage PLC. Responsible for reading different tank levels, valve- and pump control.
 - ▶ Acid dosing PLC. Responsible for dosing the correct amount of acid in the grinder tank.
2. pre-grinder
 - ▶ controlled by hardwired signals from the PLC (+24VDC).




Ensilage unit

1. Consists of two different PLC's.
 - ▶ Ensilage PLC. Responsible for reading different tank levels, valve- and pump control.
 - ▶ Acid dosing PLC. Responsible for dosing the correct amount of acid in the grinder tank.
2. pre-grinder
 - ▶ controlled by hardwired signals from the PLC (+24VDC).
3. interface to the compressor by HW signals.




Ensilage unit

1. Consists of two different PLC's.
 - ▶ Ensilage PLC. Responsible for reading different tank levels, valve- and pump control.
 - ▶ Acid dosing PLC. Responsible for dosing the correct amount of acid in the grinder tank.
2. pre-grinder
 - ▶ controlled by hardwired signals from the PLC (+24VDC).
3. interface to the compressor by HW signals.
4. interface to LiftUp system over Modbus TCP.




Ensilage unit

1. Consists of two different PLC's.
 - ▶ Ensilage PLC. Responsible for reading different tank levels, valve- and pump control.
 - ▶ Acid dosing PLC. Responsible for dosing the correct amount of acid in the grinder tank.
2. pre-grinder
 - ▶ controlled by hardwired signals from the PLC (+24VDC).
3. interface to the compressor by HW signals.
4. interface to LiftUp system over Modbus TCP.
5. single point interface to SiteControl through OPC UA.



Network topology

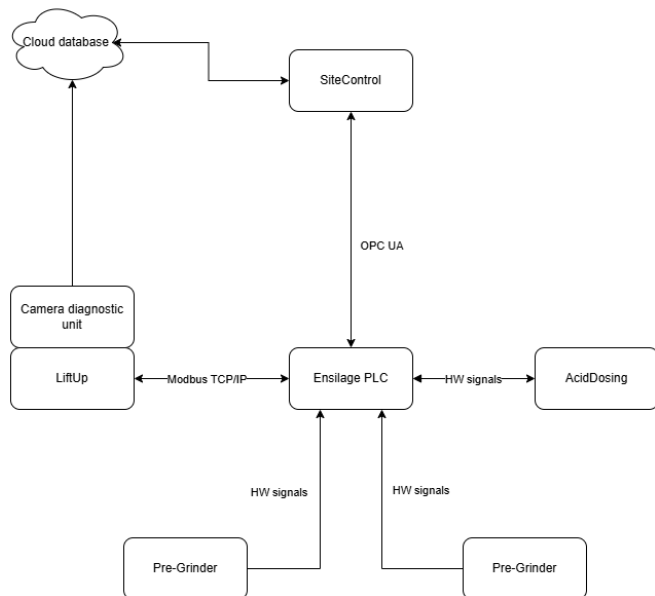

System control

1. Manual mode

System control

1. Manual mode

- ▶ Can start each subsystems manually.

System control

1. Manual mode

- ▶ Can start each subsystems manually.
- ▶ More familiarity of the process.

System control

1. Manual mode

- ▶ Can start each subsystems manually.
- ▶ More familiarity of the process.
- ▶ Need to have personell on board for operating.

System control

1. Manual mode

- ▶ Can start each subsystems manually.
- ▶ More familiarity of the process.
- ▶ Need to have personell on board for operating.

2. Semi auto mode

System control

1. Manual mode

- ▶ Can start each subsystems manually.
- ▶ More familiarity of the process.
- ▶ Need to have personell on board for operating.

2. Semi auto mode

- ▶ The controller checks if every necessary subsystem for remote control is available.

System control

1. Manual mode

- ▶ Can start each subsystems manually.
- ▶ More familiarity of the process.
- ▶ Need to have personell on board for operating.

2. Semi auto mode

- ▶ The controller checks if every necessary subsystem for remote control is available.
- ▶ Manually select each pen. The controller takes care of starting the necessary subsystems in correct order.

System control

1. Manual mode

- ▶ Can start each subsystems manually.
- ▶ More familiarity of the process.
- ▶ Need to have personell on board for operating.

2. Semi auto mode

- ▶ The controller checks if every necessary subsystem for remote control is available.
- ▶ Manually select each pen. The controller takes care of starting the necessary subsystems in correct order.

3. Auto mode

System control

1. Manual mode

- ▶ Can start each subsystems manually.
- ▶ More familiarity of the process.
- ▶ Need to have personell on board for operating.

2. Semi auto mode

- ▶ The controller checks if every necessary subsystem for remote control is available.
- ▶ Manually select each pen. The controller takes care of starting the necessary subsystems in correct order.

3. Auto mode

- ▶ Similar as semi-auto, but schedule based. Starts up at regular time intervals, run each pen for a predetermined time

System control

1. Manual mode

- ▶ Can start each subsystems manually.
- ▶ More familiarity of the process.
- ▶ Need to have personell on board for operating.

2. Semi auto mode

- ▶ The controller checks if every necessary subsystem for remote control is available.
- ▶ Manually select each pen. The controller takes care of starting the necessary subsystems in correct order.

3. Auto mode

- ▶ Similar as semi-auto, but schedule based. Starts up at regular time intervals, run each pen for a predetermined time

4. More manual control modes from sitecontrol?