


MULTI CRYSTALLINE

SOLAR MODULE 400-430 Wp

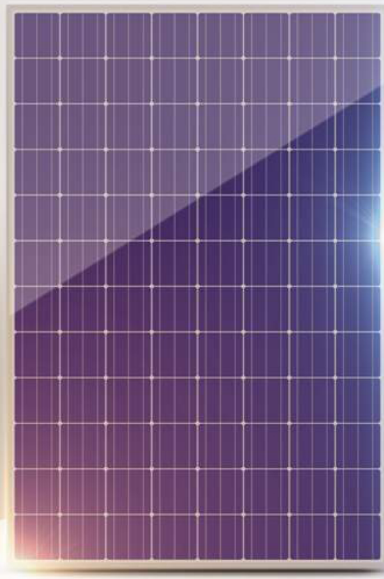

TEMPERATURE COEFFICIENTS

VOLTAGE	-0.31 % / °C
CURRENT	0.035 % / °C
POWER	-0.429 % / °C
NOCT AVG	45 °C ±3

LIMITS


MAX. SYSTEM VOLTAGE
DC 1000V

OPERATING MODULE TEMPERATURE
-40°C TO +85°C (-40°F TO 185°F)


STORM RESISTANCE/STATIC LOAD
Tested to IEC61215 for loads
up to 5400Pa (113psf).
hail and wind resistant

WARRANTY - 10 YEARS
POWER OUTPUT 90% - 10 YEARS, 80% - 25 YEARS

* I-V Curve

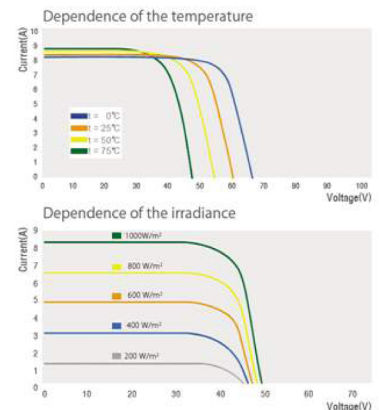

* TECHNICAL DRAWINGS

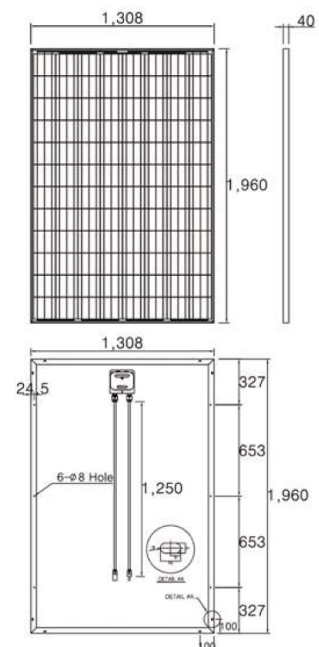

* MECHANICAL CHARACTERISTICS

Solar cells	96PCS of 6"Multi-crystalline
Front cover	Low iron tempered glass 4.0mm (0.157in)
Back cover	White polyester
Frame	Silver anodized aluminum alloy (40mm)
Cable and Connectors	12 AWG(4mm ²) cables with polarized weatherproof connectors, cable length 1.25m (49.21in.)
Junction box	NEMA IP67 rated; 4 internal bypass diodes
Dimensions	1960 (77.16in.) X 1308 (51.50in.) X 40mm (1.57in.)
Approximate Weight	35kg(77.16lbs)

* ELECTRICAL SPECIFICATION

	TS-M400	TS-M405	TS-M410	TS-M415	TS-M420	TS-M425	TS-M430
Nominal power[Wp] - P _{mpp}	400	405	410	415	420	425	430
Voltage at nominal power[V] - V _{mpp}	49.27	49.45	49.64	49.82	49.94	50.24	50.53
Current at nominal power[A] - I _{mpp}	8.12	8.19	8.26	8.33	8.41	8.46	8.51
Open-circuit voltage[V] - V _{oc}	61.10	61.36	61.62	61.88	62.06	62.47	62.82
Short-circuit current[A] - I _{sc}	8.62	8.69	8.76	8.83	8.91	8.96	9.01
Module efficiency level[%]	15.6%	15.8%	16.0%	16.2%	16.4%	16.6%	16.8%

Performance under standard test conditions (STC) : 1000W/m², 25°C, AM 1.5 / Output tolerance[%] 0~+3%