

CLEAN TIER • SOLAR • BATTERY • NO FUEL

Harka Solar

An autonomous 6 m mast platform for surveillance, communications and sensor payloads, powered by solar and battery alone.

Three panels and a 400 Ah battery pack carry the payload with no fuel, no exhaust and no engine to service. Where irradiance supports the duty cycle the platform runs indefinitely and unattended; the pack alone holds a 75-hour reserve at 100 W. The platform is delivered open: the universal head mount and internal equipment bay accept the operator's own cameras, lighting, sensors and radios.

KEY FEATURES

- 6 m hot-dip galvanised manual mast, mechanical safety brake; automatic patent winch brake available
- Battery solar energy pack: four AGM batteries, 24 VDC 400 Ah
- 3 × 360 W book-opening solar array, manual deployment, no tools
- No fuel and no engine: nothing to refuel, nothing to steal, nothing to service
- Open head mount compatible with all major camera and lighting systems
- Lockable steel compartment for operator electronics, 370 × 200 × 470 mm
- Permanently silent and zero-emission in operation — the lowest signature of the range
- Forklift pockets, all-terrain transport, ten units per truck

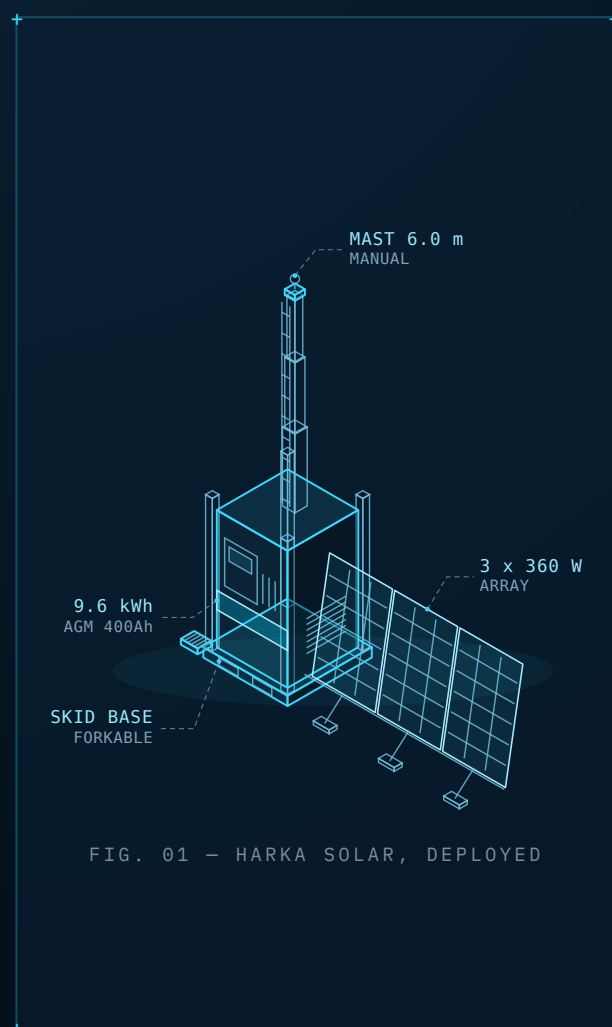


FIG. 01 — HARKA SOLAR, DEPLOYED

75 h

BATTERY RESERVE, NO
SOLAR INPUT

400 Ah

STORAGE AT 24 VDC

1,080 W

INSTALLED SOLAR
ARRAY

Zero

FUEL, EMISSIONS AND
NOISE

Reserve figure at continuous 100 W payload draw with no solar input. Runs indefinitely where irradiance supports the duty cycle.

DEPLOYMENT

Remote construction & highways Compounds and corridors with no supply.	Oil, gas & mining Fuel-free monitoring for remote oil, gas and mining sites.	Defence & border surveillance Silent, no engine heat or exhaust.
Critical national infrastructure Pipelines, substations, dams, telecoms.	Noise-sensitive & urban sites Residential edges, events, city centres.	Environmental monitoring Dust, gas, weather and traffic sensing.

Harka Solar MK-HK-S6

MAST

Lifting method	Manual
Maximum height	6 m
Rotation	None
Safety brake	Mechanical
Body	Hot-dip galvanised

BATTERY

Type & number	AGM × 4
Power pack	24 VDC – 400 Ah
Expected cycles	500

SOLAR & CHARGING

Array	3 × 360 W – 1,080 W
Deployment	Manual, book-opening
Charge source	Solar only
Engine & fuel	None
Emissions in operation	Zero

RUNNING TIME AT 100 W

Battery only	75 hrs
With solar input	Continuous where irradiance allows

DIMENSIONS & WEIGHT

Transport L × W × H	1200 × 1700 × 2520 mm
In operation L × W × H	3280 × 2400 × 6000 mm
Weight	1,100 kg
Equipment bay, internal	370 × 200 × 470 mm

TRANSPORT & HANDLING

- Ten units per truck, packaged for rapid unloading
- Forklift pockets; transportable across all terrains
- Mast raised manually in minutes by one operator, no tools or electric motors
- Solar array opens by hand; no technicians required on site

YOUR PAYLOAD, OUR POWER

Delivered as an open, ready-to-use platform. Operators integrate their own systems, or Melrakki specifies them:

- HD CCTV, PTZ and IP cameras
- LTE, 5G and Wi-Fi router modules
- Motion and environmental sensors
- Remote access panel and software
- LED matrix or infrared floodlighting
- GPS tracking and geofencing
- Alarms, sirens and UPS
- Operator branding and colour

COMMON QUESTIONS

What powers the platform?

Three 360 W panels charging a 24 VDC 400 Ah AGM pack. There is no engine and no fuel on board.

How long does it run without sun?

75 hours at a 100 W draw on battery alone, and indefinitely where irradiance supports the duty cycle.

How loud is it?

Silent at all times, with no engine heat or exhaust.

Is it secure against tampering?

All sensitive components are housed in a lockable steel compartment.



Tell us the load, the location and the conditions.

We engineer the platform that keeps it alive, and support it for the life of the deployment.

ENQUIRIES

www.melrakki.systems

hello@melrakki.systems

SUPPLY & SUPPORT

Lead time, commissioning, spares and warranty terms confirmed at quotation. Technical support direct from Melrakki Systems.