
Digital PenEmpower next-level collaboration

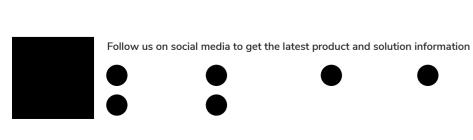

Product Specification

Security certification information = Non-safety parts, no safety certification involved.

Environmental Requirements = Raw materials and packaging materials used for parts comply with RoHS requirements.

Packaging specifications

- Inner packing material: sky and earth box
- Bag size: 185mm*65*25mm
- Orientation of material: Horizontal
- Quantity of inner package: 1PCS
- Outer packing material: corrugated paper, K=K
- Outer box size: 565mm X 410mm X 160mm
- Outer packing quantity: 80PCS

CYNKCO



Transportation and Storage Environmental Requirements

Transportation requirements

- Good packaging should be used during transportation to ensure that the product will not be damaged by environmental atmosphere or undue stress.
- Avoid violent impact or shock during transportation. It should be waterproof and moisture-proof during transportation.
- The temperature and humidity of the transportation environment should meet the requirements of storage conditions.
- Transportation of static sensitive devices should be placed in anti-static packaging, if necessary, the use of ion fans to eliminate static electricity generated during transportation.

Storage requirements

- Must be stored in a clean, ventilated, non-corrosive gas warehouse.
- Items with anti-static requirements should be stored in an anti-static environment.
- The device should be stored for a limited period of one year at a temperature of -10~40°C and a relative humidity of not more than 75%.

08:54

Technical specifications, performance parameter indicators and test methods

Basic functions

TX (transmitter side)				
Keystrokes	Functions		note	
Strokes	Replaces finger tapping and writing functions			
Annotation keys	Short press	Open Annotation		
	Long press	Exit Annotation		
Page Up Key	Short press	Page up		
	Long press	Increase volume		
Page Down Key	Short press	Page down		
	Long press	Volume down		
Whiteboard key	Short press	Enter Whiteboard		
	Long press	Exit Whiteboard		
Indicator Light				
Indicator light	Status			
Red light	Red light always on during charging; low battery blinking			
Green light	Lights up when charging is complete			
Blue light	Working			

CYNKCO



Product parameters

Item	Product Parameter	
Dimension	14*166mm	
Weight	26g	
Power supply mode	Rechargeable lithium battery	
Working Current	≤30mA	
Input Voltage	2.75-4.2V	
Working time	8-12 hours	
Battery capacity	320mAh	
Charging box interface	TYPE-C	
Charging time	1-2 hours	
Charging current	≤300mA	
Effective distance	Barrier-free distance not less than 20 meters	
Working Temperature	5°C~35°C	



