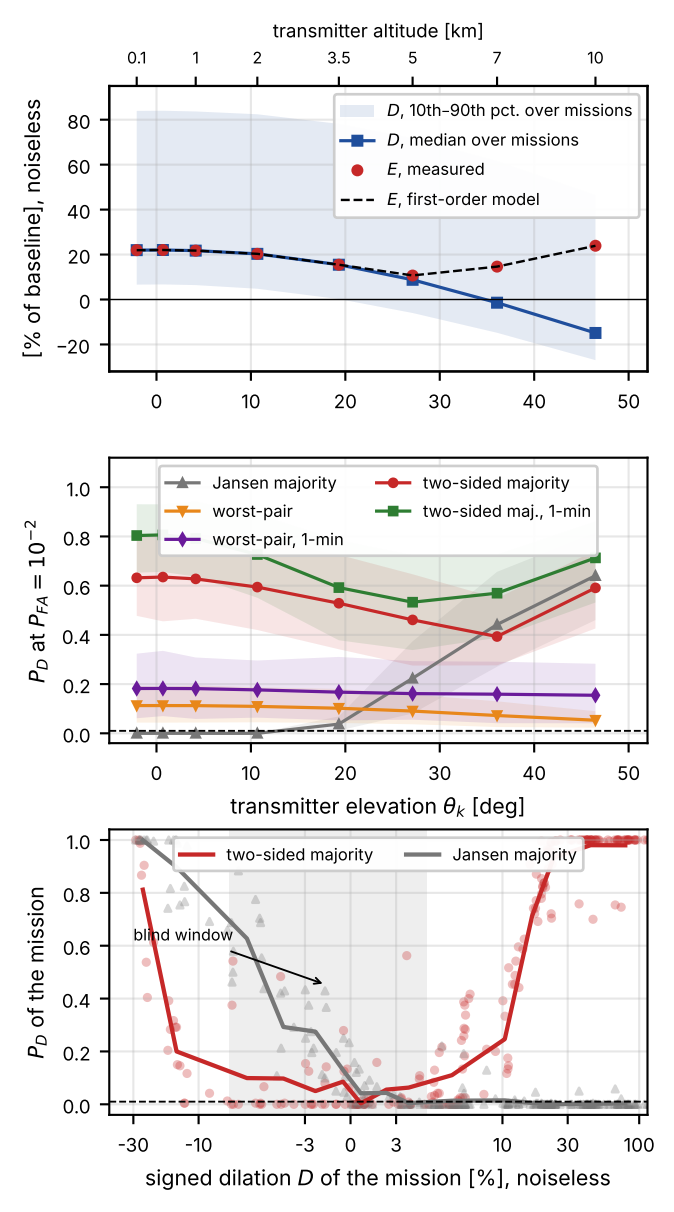
transmitter altitude [km]
0.1
1
2
3.5
5
7
10
[% of baseline], noiseless
D, 10th–90th pct. over missions
D, median over missions
E, measured
E, first-order model
Jansen majority
worst-pair
worst-pair, 1-min
two-sided majority
two-sided maj., 1-min
P_D at P_FA = 10^−2
transmitter elevation θ_k [deg]
two-sided majority
Jansen majority
blind window
P_D of the mission
signed dilation D of the mission [%], noiseless