




TOP VIEW

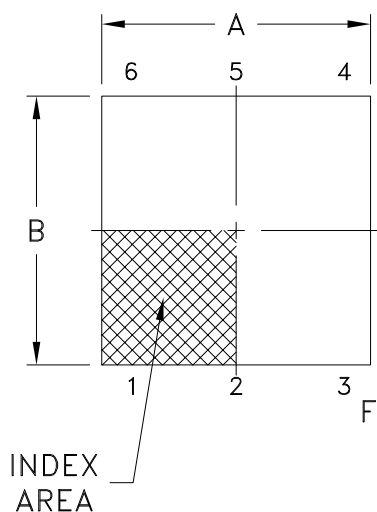

BOTTOM VIEW

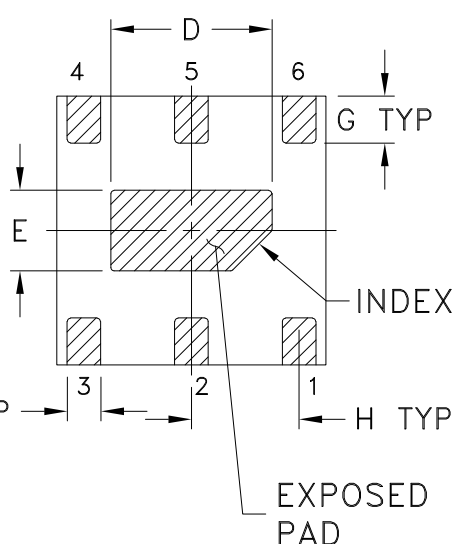


PCB Land Pattern

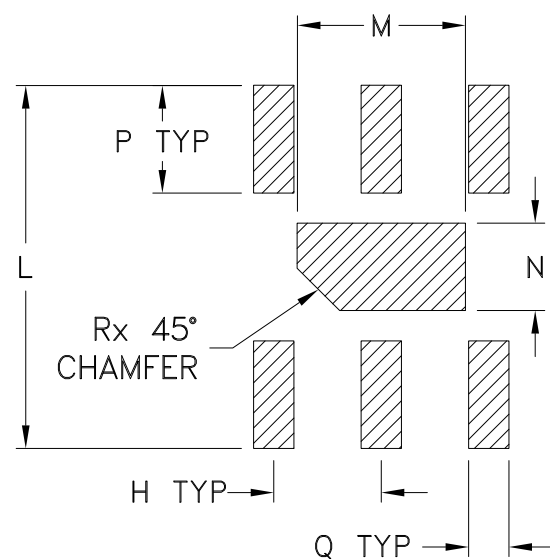

Suggested Layout,
Tolerance to be within ± 0.002

 DENOTES METALLIZATION

SIDE VIEW

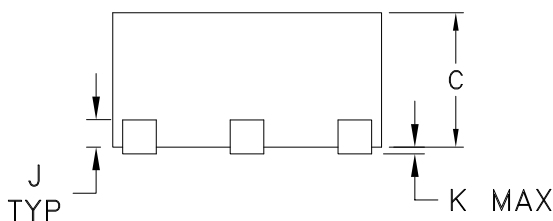

CASE#	A	B	C	D	E	F	G	H	J	K	L	M	N
MC3000	.079 (2.00)	.079 (2.00)	.039 (1.00)	.047 (1.20)	.024 (.60)	.010 (.25)	.014 (.35)	.031 (.80)	.008 (.20)	.002 (.05)	.106 (2.70)	.049 (1.25)	.026 (.65)
CASE #	P	Q	R	WT, GRAM									
MC3000	.031 (.80)	.012 (.30)	.012 (.30)	.006									

Dimensions are in inches (mm). Tolerances: 2 Pl. ± 0.01 ; 3 Pl. ± 0.005

Notes:

- Case material: Plastic.
- Termination finish:

For RoHS Case Styles: Tin-Silver over Nickel plated or Matte-Tin plated (See Data sheet).

All models, (+) suffix.

- Lead #1 identifier shall be located in the cross-hatched area shown.
Identifier may be either a molded or marked feature.



P.O. Box 350166, Brooklyn, New York 11235-0003 (718) 934-4500 Fax (718) 332-4661 For detailed performance specs & shopping online see Mini-Circuits web site



The Design Engineers Search Engine Provides ACTUAL Data Instantly From MINI-CIRCUITS At: www.minicircuits.com

RF/IF MICROWAVE COMPONENTS