

Product Name	Blender	Factory	MYLUX	Date	2024/11/4
P.O. No.	LS_H240830_2	Product Rating	230V, 50-60Hz, 900W	Factory Model No.	Y-938
Customer Model No.	BL-D01EWH	Destination	Germany	Brand	HUROM
Order Qty	1000PCS	Standby Qty	0	INSP. QTY.	1000PCS
Sampling INSP. QTY.	80PCS	Serial No. : EF2411010001-EF2411011000			

INSPECTION STANDARD: Finished product inspection specification NO:QA-23-109-012 version: 01

ISO2859 General Inspection, Level II, Normal, Single Sampling Plan

Acceptance Quality Level		Accept No.	Reject No.	Found No.	AQL JUDGEMENT
CRITICAL:	0	0	0	0	ACCEPT
MAJOR:	1.0	2	3	0	
MINOR:	4.0	7	8	5	

NO.	DESCRIPTION OF DEFECT	CR	MA	MI
1	Poor coating on inner surface	0	0	1
2	Scratch mark on surface	0	0	1
3	Dirt mark on surface	0	0	3
4				
5				
6				
7				
Total :		0	0	5

Remark:

- 1、All the unacceptable products above, MYLUX will rework.
- 2、The defective photos are as shown below.

(1) Defect Photo

	
1. Poor coating on inner surface - minor	2. Scratch mark on surface - minor
	
3. Dirt mark on surface - minor	4. Dirt mark on surface - minor

	
---	--

5. Dirt mark on surface - minor

(2) CRITICAL PARTS CHECK LIST

Object/ part NO.	Manufacturer	Type	Technical data	Certification	RESULT	PHOTO
Supply cord	Toong Yean Plastic Ind. Co., Ltd.	H03VVH2-F (60227 IEC 52)	2x0.75mm ²	VDE 40024356	P	
Plug	Toong Yean Plastic Ind. Co., Ltd.	TY-019	250V~, 16A	VDE 40002153	P	
Motor	Xiamen YOUo Intelligent Technology Co., Ltd.	M7643CAV22 23P160F	AC220-230V 50-60Hz 900W, Class F	/	P	
Motor protector	You Xian Lian Cheng Electron Co. Ltd.	17AM1 039A5+PTC	AC 250 V, 160 ℃	VDE 40028660	P	
Y-Capacitor	JYH HSU (JEC) ELECTRONICS LTD	JY	Y2, 4700pF, 40/125/21	VDE 40038643	P	
Capacitor	Tenta Electric Industrial Co.,Ltd.	MKP	0.33μF, 275VAC, X2, 40/100/21	VDE 119119	P	
Interlock Switch	GUANGDONG YUSHUN ELECTRIC APPLIANCE LTD	KW-5	10.1A, 125/250V~, 3E4, T125; 10(5)A, 125/250V~, 1E4, T125, GWT 850	CN 52651	P	
Power switch	Zhejiang Jialong Electron Co., Ltd.	KAN-9-CC-1	250VAC, 10(3)A, T85, 1E4, GWT 850	TUV R50533106	P	


(3) Check the CDF record photos					
Alternative	Toong Yean Plastic Ind. Co., Ltd.	TY-019	250V~, 16A	DIN VDE 0620-1 IEC 60884-1	VDE 40002153
Supply cord	Toong Yean Plastic Ind. Co., Ltd.	H03VVH2-F (60227 IEC 52)	2 x 0,75mm2	EN 50525-2-11 DIN VDE 0281-5	VDE 40024356
Motor	Xiamen YOUo Intelligent Technology Co., Ltd.	M7643CAV22 23P160F	AC220-230V 50- 60Hz 900W, Class F	IEC/EN 60335-1 IEC/ EN 60335- 2-14	Tested with appliance
- Motor protector	You Xian Lian Cheng Electron Co. Ltd.	17AM1 039A5+PTC	AC 250 V,160℃	IEC/EN 60730-1 IEC/EN 60730-2- 22	VDE 40028660
Alternative	JYH HSU (JEC) ELECTRONICS LTD	JY	Y2, 4700pF, 40/125/21	IEC/EN 60384-14	VDE 40038643
Alternative	Tenta Electric Industrial Co.,Ltd.	MEX	0.33μF, 275VAC, X2, 40/100/21	IEC/EN 60384-14	VDE 119119
Power switch	Zhejiang Jialong Electron Co., Ltd.	KAN-9-CC-1	250VAC, 10(3)A, T85, 1E4, GWT 850	IEC/EN 61058-1	TUV R50533106
Micro-switch/interlock Switch	GUANGDONG YUSHUN ELECTRIC APPLIANCE LTD	KW-5	10.1A, 125/250V~, 3E4, T125; 10(5)A, 125/250V~, 1E4, T125, GWT 850	IEC/EN 61058-1	CN 52651

Remark:
The "CRITICAL PARTS CHECK LIST" and "Check the CDF record photos "are based on the CE test report (report No. 230526005GZU-001)

(4) SERIAL NUMBER of INSPECTED UNITS

SERIAL NUMBER FORMAT AND RANGE:

The numbers below

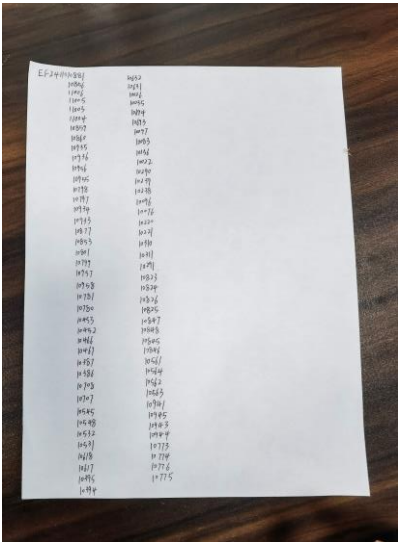



INSPECTION REPORT

REPORT NO. : [LZX20241104-1](#)

(5) DATA TEST											
NO.	Test Item \Serial NO.	0881	0860	0935	0798	0933	0957	0453	0387	Blank	Blank
1	Rated Power NO-load power (250-350W)	290	294	289	296	291	297	288	291	Blank	Blank
	500mL load rated water test load power (640-753W)	670	675	674	668	677	674	671	667	Blank	Blank
	700mL load rated water test load power (780-900W)	802	799	796	803	798	801	795	798	Blank	Blank
2	Blending Water Test (1min)	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	Blank	Blank
3	Jar Leakage Test (1Hour)	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	Blank	Blank
Remark	The items (number1 to 3) are tested according to the S-2 standard,8 products are selected for testing, and the test results are as above.										
NO.	Test Item \Serial NO.	0707	0548	0531	0617	0394	0026	0694	0097	0156	0239
4	Electric Strength (1500V/3mA/2s)	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS
5	Leakege Current Test (≤0.25mA)	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS
6	Cord Length (85±5cm)	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS
Remark	1、The above items (number4 to 6) are tested according to the G II standard, and the data is only part of the test results, because the space limit does not show all the results.										
NO.	Test Item \Serial NO.	0096					0221				
7	No-load Speed Test (18810-22990rpm)	20629rpm					20315rpm				
NO.	Test Item \Serial NO.	0310					0823				
8	Noise Test ≤90dB (1m, 700mL)	77.1dB					77.8dB				
NO.	Test Item \Serial NO.	0825					0847				
9	Jar Container Capacity 700mL±35mL	699mL					699.5mL				
	Jar Container Capacity 500mL±25mL	501.0mL					500.50mL				
Remark	The items (number7 to 9) are tested according to the Finished product inspection specification,2 products are selected for testing, and the test results are as above.										
NO.	Test Item \Serial NO.	0845		0561		0945		0773		0776	
	Press the button force: 0.7-2.3kgf	1.2		1.2		1.3		1.2		1.4	



INSPECTION REPORT

5/5

REPORT NO. : [LZX20241104-1](#)

10	Jar lid and filp lid: Locking force is 1.5-3kgf.cm	1.8	1.8	1.9	1.9	2.0
	Jar lid and filp lid: Un-locking force is 0.3-2.2kgf.cm	1.8	1.7	1.9	1.8	1.8
	Jar base and main housing: Locking force is 23-37kgf.cm, and the un-locking force is 2.6-18kgf.cm	Pass	Pass	Pass	Pass	Pass
	Jar and jar base: Locking force is 25kgf.cm, and the un-locking force is 15-30kgf.cm	Pass	Pass	Pass	Pass	Pass
Remark	The item (number10) is tested according to the Finished product inspection specification, 5 products are selected for testing, and the test results are as above.					
NO.	Test Item \Serial NO.	0943				
11	Power cord tension as per IEC60335-1 requirement ≥6kgf	Pass				
(6) INFORMATION CHECK LIST						
NO.	Item	DETAILS/POSITION				Result
1	VOLTAGE SYSTEM	230V, 50-60Hz, 900W				P
2	BAR CODE	ON GIFT BOX 8809686402687				P
3	ACCESSORIES	User manual*1、Jar (500mL) *2、Jar (700mL) *1、Cup cap*2、Blade base with blade*1				P
4	Printing	The PE bags and user manual printing match the reference drawings				P
(7) OTHER						
Item	Inspection Standard	DETAILS				结果 Result
Drop Test	ISTA-1A	Carton Box GROSS WEIGHT: 7.03kg DROP TEST SEQUENCE: 760mm SAFETY : PASS FUNCTION : PASS APPEARANCE : PASS				P
Carton size	445×361×353mm	448×365×358mm				P
Gift Box Size	346×215×333mm	352×220×335mm				P
HOTOEM Information Technology Company Limited		Liang Zixuan		Li Yanlin		
REPORTED BY		INSPECTOR' S SIGNATURE		FACTORY' S REPRESENTATIVE SIGNATURE		