

Product Name	Blender	Factory	MYLUX	Date	2026/3/27
P.O. No.	LS_H260127	Product Rating	220-240V 50-60Hz 250W	Factory Model No.	Y-910
Customer Model No.	BL-C01CCR	Destination	Vietnam	Brand	HUROM
Order Qty	1206PCS	Standby Qty	0	INSP. QTY.	1206PCS
Sampling INSP. QTY.	125PCS	Serial No. : EF2603310001-EF260331206			

INSPECTION STANDARD: [Finished product inspection specification NO:QA-20-109-006 version: 01](#)

[ISO2859 General Inspection, Level II, Normal, Single Sampling Plan](#)

Acceptance Quality Level		Accept No.	Reject No.	Found No.	AQL JUDGEMENT
CRITICAL:	0	0	0	0	ACCEPT
MAJOR:	1.0	3	4	0	
MINOR:	2.5	7	8	6	

NO.	DESCRIPTION OF DEFECT	CR	MA	MI
1	Flash on foot pad	0	0	1
2	Poor plating on decoration ring	0	0	2
3	Impurity on button	0	0	1
4	Impurity under label	0	0	2
5				
6				
7				
Total :		0	0	6

Remark:

- 1、All the unacceptable products above, MYLUX will rework.
- 2、The defective and remark photos are as shown below.
- 3、Found CR certificate LOGO on the base.

(1) Defect Photo

	
1. Flash on foot pad - Minor	2. Poor plating on decoration ring - Minor
	
3. Poor plating on decoration ring - Minor	4. Impurity on button - Minor

			
5. Impurity under label - Minor		6. Impurity under label - Minor	
			
Remark: Found CR certificate LOGO on the base.			

(2) CRITICAL PARTS CHECK LIST

Object/ part NO.	Manufacturer	Type	Technical data	Certification	RESULT	PHOTO
Power cord	Toong Yean Plastic Ind. Co.,Ltd.	H03VVH2-F (60227 IEC 52)	2 x 0,5mm2 (Cord length< 2m) 2 x 0,75mm2	EN 50525-2- 11:2011	P	
Plug	Toong Yean Plastic Ind. Co.,Ltd.	TY-011	250V~, 2.5A	DIN VDE 0620 Teil 101:1992-05	P	
Motor	Xiamen YOUo Intelligent Technology Co., Ltd	M5440CAV2224T 133	220-240V ~, 50- 60Hz, 250W	IEC/EN 60335- 1 IEC/EN 60335- 2- 14	P	
Thermal protector	Zhangzhou Aupo Electronics Co., Ltd.	BF133	AC 250V, 10A, Tf:133°C	IEC 60691:2015 EN 60691:2016	P	
X-capacitor	KUNSHAN UTX VALUE ENTERPPISE CO., Ltd.	HQX X2	275/310V ~, 0.33uF, ,4 0/110/56/B	EC 60384-14 EN 60384-14	P	
Y-capacitor	Jyh Chung	JY	Y2, 300V~, 4700pF, 40/125/21	IEC 60384-14 EN 60384-14	P	
Micro switch	Guangdong Yushun Electric Appliance Ltd.	KW-5	250V~, 5A, 3E4, T125	IEC 61058-1 EN 61058-1	P	

Switch	zhejiang Jialong Electron Co.,Ltd.	KAN-9-GG-1	250V~, 10 (3) A, T85, 10E3	IEC 61058-1 EN 61058-1	P	
Internal wire	Qifurui Electronics Co.,Ltd.	1015	26-18AWG, 600V, 105°C	IEC/EN 60335- 1 IEC/EN 60335- 2-14	P	

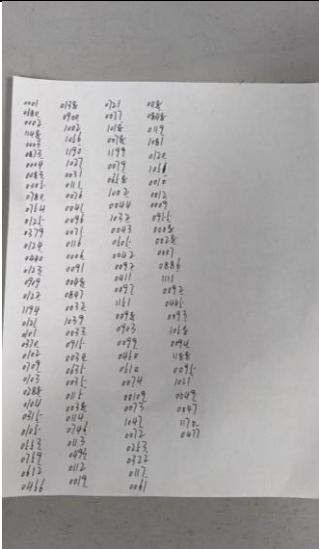
(3) Check the CDF record photos

Supply cord	Toong Yean Plastic Ind. Co., Ltd.	H03VVH2-F (60227 IEC 52)	2 x 0,5mm ² (Cord length< 2m) 2 x 0,75mm ²	EN 50525-2- 11:2011	VDE 40024356
EU plug	Toong Yean Plastic Ind. Co., Ltd.	TY-011	250V~, 2,5A	DIN VDE 0620 Teil 101:1992-05	VDE 40002154
Motor	Xiamen YOUo Intelligent Technology Co., Ltd.	M5440CAV22 24T133	AC220-240V, 50-60Hz, 250W, Class F	IEC/EN 60335-1 IEC/EN 60335-2- 14	Tested with appliance
Thermal link in motor	Zhangzhou Aupo Electronics Co., Ltd.	BF133	AC 250V, 10A, Tf:133°C	IEC 60691:2015 EN 60691:2016	VDE 40005418
X capacitor	Ultra Tech XiphiEnterprise Co. Ltd.	HQX	0.33μF, 275VAC, X2, 40/110/56	IEC 60384- 14:2013 + A1:2016 EN 60384-14: 2013+A1:2016	VDE 40024534
Alternative	Jyh Chung Electronic Co Ltd	JY	Y2, 300V~, 4700pF, 40/125/21	IEC 60384- 14:2013 + A1:2016 EN 60384-14: 2013+A1:2016	VDE 123326
Micro-switch	Guangdong Yushun Electric Appliance Ltd.	KW-5	5A, 250V~, 3E4, T125	IEC 61058- 1:2000+A1+A2 EN 61058- 1:2002+A2:2008	TUV Rh R50179582
Power switch	Zhejiang Jialong Electron Co., Ltd.	KAN-9-GG-1	250VAC, 10(3)A, T85, 10E3	IEC 61058- 1:2000+A1+A2 EN 61058- 1:2002+A2:2008	VDE 40033672
Alternative	Qifurui Electronics Co.,Ltd.	1015	26-18AWG, 600V, 105°C	IEC/EN 60335-1 IEC/EN 60335-2- 14	Tested with appliance UL E211048

Remark:

The "CRITICAL PARTS CHECK LIST" and "Check the CDF record photos "are based on the CB report (report No.XYU-ESH-P20011501-A2)

(4) SERIAL NUMBER of INSPECTED UNITS

SERIAL NUMBER FORMAT AND RANGE:	The numbers below
	

(5) DATA TEST

NO.	Test Item \Serial NO.	0580	0003	0873	0754	0379	0440	0909	0121	Blank	Blank
1	Rated Power NO-load power (85-145W)	89	92	91	87	89	92	93	90	Blank	Blank
	350mL load rated water test load power (188- 268W)	193	195	190	189	194	192	190	193	Blank	Blank
	600mL load rated water test load power (205- 285W)	211	210	208	214	211	217	209	212	Blank	Blank
2	Blending Water Test	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	Blank	Blank
3	Jar Leakage Test	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	Blank	Blank
Remark	The items (number1 to 3) are tested according to the S-2 standard, 8 products are selected for testing, and the test results are as above.										
NO.	Test Item \Serial NO.	0370	0288	0105	0612	0138	1002	1190	0031	0096	0847
4	Hi-Pot Check (3000V/2s/5mA)	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS
5	Leakege Current Test ($\leq$ 0.25mA)	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS
6	Cord Length (85 $\pm$ 5cm)	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS
Remark	1、The above items (number4 to 6) are tested according to the G II standard, and the data is only part of the test results, because the space limit does not show all the results.										
NO.	Test Item \Serial NO.	1039					0035				
7	No-load Speed Test (17000-23000rpm)	22506rpm					21897rpm				

NO.	Test Item \Serial NO.	0114					0493				
8	Noise Test ≤95dB	81.0dB					82.1dB				
NO.	Test Item \Serial NO.	0019					1018				
9	Jar Container Capacity 600mL±30mL	601mL					602mL				
	Jar Container Capacity 350mL±17.5mL	350mL					350mL				
Remark	The items (number7 to 9) are tested according to the Finished product inspection specification,2 products are selected for testing, and the test results are as above.										
NO.	Test Item \Serial NO.	0079	0658	1032	0411	1151					
10	Jar holder and the main body: Put the jar holder into main body, the screw force is 8-40kgf, and the loose force is 5-35kgf.	PASS	PASS	PASS	PASS	PASS					
	Operating Force Test Jar and Jar holder: Locking tightly force 30kgf.cm; Loose force ≤40kgf.cm	PASS	PASS	PASS	PASS	PASS					
	Operating Force Test The micro switch starting force of the jar holder pressing into the main body is 0.5-8kgf	2.4kgf	2.2kgf	2.1kgf	2.4kgf	2.3kgf					
	Operating Force Test Lid and jar body: Locking tightly force is 30kgf.cm; Loose force ≤40kgf.cm	PASS	PASS	PASS	PASS	PASS					
	Operating Force Test The open/close button force is 0.5kgf≤X≤4.1kgf	1.5kgf	1.4kgf	1.4kgf	1.2kgf	1.5kgf					
Remark	The item (number10) is tested according to the Finished product inspection specification, 5 products are selected for testing, and the test results are as above.										
NO.	Test Item \Serial NO.	0510									
11	Power cord tension as per IEC60335-1 requirement ≥6kgf	PASS									
NO.	Test Item \Serial NO.	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
12	Upper cover size Factory drawing: 9.98±0.1mm	9.92	9.93	9.93	9.92	9.94	9.91	9.93	9.92	9.92	9.92



INSPECTION REPORT

6/6

REPORT NO. : [LZX20260327-1](#)

Remark	The items (number 12) are tested with the spare upper cover, because it can't be test unless destroy the cover. Factory's drawing still remain 9.98±0.1mm for production control.		
(6) INFORMATION CHECK LIST			
NO.	Item	DETAILS/POSITION	Result
1	VOLTAGE SYSTEM	220-240V, 50-60Hz, 250W	P
2	BAR CODE	ON GIFT BOX 8809686403097	P
3	ACCESSORIES	User manual*1、Jar (350mL) *1、Jar (600mL) *1、Cup cap*2、Blade base with blade*1	P
4	Printing	The PE bags and user manual printing match the reference drawings	P
(7) OTHER			
Item	Inspection Standard	DETAILS	结果 Result
Drop Test	ISTA-1A	Carton Box GROSS WEIGHT: 7.05kg DROP TEST SEQUENCE: 760mm SAFETY : PASS FUNCTION : PASS APPEARANCE : PASS	P
Carton size	469×345×260mm	470×348×265mm	P
Gift Box Size	225×163×240mm	228×165×240mm	P
HOTOEM Information Technology Company Limited		Liang Zixuan	Li Yanlin
REPORTED BY		INSPECTOR' S SIGNATURE	FACTORY' S REPRESENTATIVE SIGNATURE