

Product Name	Blender	Factory	YOUo	Date	2024/5/15
P.O. No.	LS_H240315	Product Rating	220V, 60Hz 250W	Factory Model No.	Y-910
Customer Model No.	BL-C01FRD	Destination	Korea	Brand	HUROM
Order Qty	2200PCS	Standby Qty	0	INSP. QTY.	2200PCS
Sampling INSP. QTY.	125PCS	Serial No. : EF2405200001-EF2405202200			

INSPECTION STANDARD: Finished product inspection specification NO:QA-20-109-006 version: 01

ISO2859 General Inspection, Level II, Normal, Single Sampling Plan

Acceptance Quality Level		Accept No.	Reject No.	Found No.	AQL JUDGEMENT
CRITICAL:	0	0	0	0	ACCEPT
MAJOR:	1.0	3	4	0	
MINOR:	2.5	7	8	7	

NO.	DESCRIPTION OF DEFECT	CR	MA	MI
1	Impurity on surface	0	0	1
2	Poor printing on surface	0	0	1
3	Scratch mark on button	0	0	1
4	Scratch mark on surface	0	0	3
5	Pit mark on button	0	0	1
6				
7				
Total :		0	0	7

Remark:


- 1、All the unacceptable products above, YOUo will rework.
2、The defective photos are as shown below.

(1) Defect Photo

	
1. Impurity on surface - Minor	2. Poor printing on surface - Minor
	
3. Scratch mark on button - Minor	4. Scratch mark on surface - Minor

	
5. Scratch mark on surface - Minor	6. Scratch mark on surface - Minor
	
7. Pit mark on button - Minor	

(2) CRITICAL PARTS CHECK LIST

Object/ part NO.	Manufacturer	Type	Technical data	Certification	RESULT	PHOTO
Power cord	Toong Yean Plastic Ind. Co.,Ltd.	60227 IEC 52 (H03VVH2-F)	2x0.75mm ²	EN 50525-2	P	
Plug	Toong Yean Plastic Industrial Co.,Ltd.	TY-021	250V~, 2.5A	VDE 40002154	P	
Motor	Xiamen YOUo Intelligent Technology Co., Ltd	M5440CAV2224T 133	220-240V ~, 50- 60Hz, 250W	IEC/EN 60335- 1 IEC/EN 60335- 2-14	P	
Thermal protector	Zhangzhou Aupo Electronics Co., Ltd.	BF133	250V ~, 10A, 133℃	IEC 60691 EN 60691	P	
X-capacitor	KUNSHAN UTX VALUE ENTERPPISE CO., Ltd.	HQX X2	275/310V ~, 0.33uF, ,4 0/110/56/B	EC 60384-14 EN 60384-14	P	
Y-capacitor	Jyh Chung	JY	Y2, 300V~, 4700pF, 40/125/21	IEC 60384-14 EN 60384-14	P	
Micro switch	Guangdong Yushun Electric Appliance Ltd.	KW-5	250V~, 5A, 3E4, T125	IEC 61058-1 EN 61058-1	P	

Switch	zhejiang Jialong Electron Co.,Ltd.	KAN-9-GG-1	250V~,10 (3) A, T85,10E3	IEC 61058-1 EN 61058-1	P	
Internal wire	Qifurui Electronics Co.,Ltd.	1015	26-18AWG, 600V, 105℃	IEC/EN 60335-1 IEC/EN 60335-2-14	P	

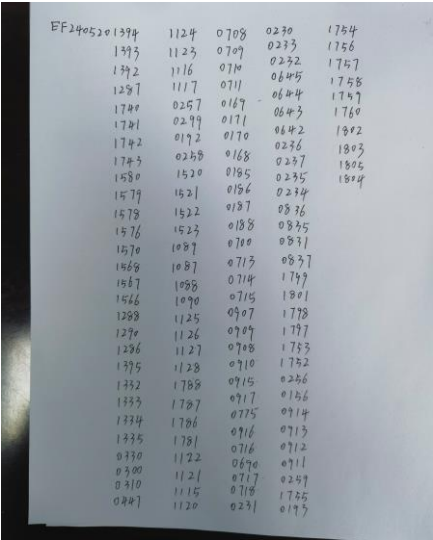
(3) Check the CDF record photos

Plug	Toong Yean Plastic Industrial Co.,Ltd.	TY-021	250 V~, 2.5 A	KC
Alt) Cord	Toong Yean Plastic Ind. Co., Ltd.	60227 IEC 52 (H03VVH2-F)	2 x 0.75 mm²	KC
Motor	Xiamen YOuo Intelligent Technology Co., Ltd.	M5440CAV2224T13	220-240 V~, 50-60 Hz, 250 W	
Thermal protector (for Motor)	Zhangzhou Aupo Electronics Co., Ltd.	BF 133	250 V~, 10 A, 133 ℃	KC
X-capacitor	KUNSHAN UTX VALUE ENTERPPISE CO., LTD.	HQX X2	275/310 V~, 0.33 μF, 40/110/56/B	KC
Micro switch	Guangdong Yushun Electric Appliance Ltd.	KW-5	250 V~, 5 A, 3E4, T125	KC
Switch	zhejiang Jialong Electron Co., Ltd.	KAN-9-GG-1	250 V~, 10(3) A, T85, 10E3	KC

Remark:

The "CRITICAL PARTS CHECK LIST" and "Check the CDF record photos "are based on the KC report (report No. HU071120-20012C)

(4) SERIAL NUMBER of INSPECTED UNITS

SERIAL NUMBER FORMAT AND RANGE:	The numbers below
o	

(5) DATA TEST

NO.	Test Item \Serial NO.	1394	1741	1579	1568	1288	1334	0310	1124	Blank	Blank
1	Rated Power NO-load power (77-137W)	91	87	89	94	92	95	88	89	Blank	Blank
	350mL load rated water test load power (160- 240W)	173	170	175	178	174	181	177	179	Blank	Blank
	600mL load rated water test load power (185- 265W)	189	186	193	194	191	197	194	198	Blank	Blank
2	Blending Water Test	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	Blank	Blank
3	Jar Leakage Test	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	Blank	Blank
Remark	The items (number1 to 3) are tested according to the S-2 standard,8 products are selected for testing, and the test results are as above.										
NO.	Test Item \Serial NO.	0257	1521	1089	1126	1788	1115	0708	0169	0188	0713
4	Hi-Pot Check (3000V/2s/5mA)	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS
5	Leakege Current Test ($\leq$ 0.25mA)	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS
6	Cord Length (85 $\pm$ 5cm)	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS
Remark	1、The above items (number4 to 6) are tested according to the G II standard, and the data is only part of the test results, because the space limit does not show all the results.										
NO.	Test Item \Serial NO.	0907					0915				
7	No-load Speed Test (17000-23000rpm)	21083rpm					21026rpm				
NO.	Test Item \Serial NO.	0716					0231				
8	Noise Test $\leq$ 95dB	79.8dB					80.6dB				
NO.	Test Item \Serial NO.	0645					0237				
9	Jar Container Capacity 600mL $\pm$ 30mL	599.5mL					599.7mL				
	Jar Container Capacity 350mL $\pm$ 17.5mL	349.8mL					349.6mL				
Remark	The items (number7 to 9) are tested according to the Finished product inspection specification,2 products are selected for testing, and the test results are as above.										
NO.	Test Item \Serial NO.	0836		1799		1753		0256		1755	
	Jar holder and the main body: Put the jar holder into main body, the screw force is 8-40kgf, and the loose force is 5-35kgf.	PASS		PASS		PASS		PASS		PASS	

10	Operating Force Test Jar and Jar holder: Locking tightly force 30kgf.cm; Loose force ≤ 40kgf.cm	PASS	PASS	PASS	PASS	PASS					
	Operating Force Test The micro switch starting force of the jar holder pressing into the main body is 0.5-8kgf	3.6kgf	3.8kgf	3.8kgf	3.9kgf	3.7kgf					
	Operating Force Test Lid and jar body: Locking tightly force is 30kgf.cm; Loose force ≤ 40kgf.cm	PASS	PASS	PASS	PASS	PASS					
	Operating Force Test The open/close button force is 0.5kgf≤X≤ 4.1kgf	1.1kgf	1.2kgf	1.2kgf	1.0kgf	1.0kgf					
Remark	The item (number10) is tested according to the Finished product inspection specification, 5 products are selected for testing, and the test results are as above.										
NO.	Test Item \Serial NO.	1760									
11	Power cord tension as per IEC60335-1 requirement ≥6kgf	PASS									
NO.	Test Item \Serial NO.	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
12	Upper cover size Factory drawing: 9.98± 0.1mm	9.92	9.94	9.90	9.92	9.92	9.92	9.94	9.92	9.92	9.90
Remark	The items (number 12) are tested with the spare upper cover, because it can't be test unless destroy the cover. Factory's drawing still remain 9.98±0.1mm for production control.										
(6) INFORMATION CHECK LIST											
NO.	Item	DETAILS/POSITION									Result
1	VOLTAGE SYSTEM	220V, 60Hz, 250W									P
2	BAR CODE	ON GIFT BOX 8809069580230									P
3	ACCESSORIES	User manual*1、Jar (350mL) *1、Jar (600mL) *1、Cup cap*2 、 Blade base with blade*1									P
4	Printing	The PE bags and user manual printing match the reference drawings									P
(7) OTHER											
Item		Inspection Standard		DETAILS						结果 Result	
Drop Test		ISTA-1A		Carton Box GROSS WEIGHT: 7.07kg DROP TEST SEQUENCE: 760mm SAFETY : PASS FUNCTION : PASS APPEARANCE : PASS						P	



INSPECTION REPORT

REPORT NO. : [LZX20240515-1](#)

Carton size	469×345×260mm	470×350×265mm	P
Gift Box Size	225×163×240mm	225×165×245mm	P
HOTOEM Information Technology Company Limited	Liang Zixuan	Li Yanlin	
REPORTED BY	INSPECTOR' S SIGNATURE	FACTORY' S REPRESENTATIVE SIGNATURE	