

Product Name	Blender	Factory	MYLUX	Date	2024/8/23
P.O. No.	LS_H240625	Product Rating	220-230V, 50-60Hz, 900W	Factory Model No.	Y-938
Customer Model No.	BL-D01ATG	Destination	Philippines	Brand	HUROM
Order Qty	1000PCS	Standby Qty	0	INSP. QTY.	1000PCS
Sampling INSP.QTY.	80PCS	Serial No. : EF2408240001-EF2408241000			

INSPECTION STANDARD: Finished product inspection specification NO:QA-23-109-012 version: 01

ISO2859 General Inspection, Level II, Normal, Single Sampling Plan

Acceptance Quality Level		Accept No.	Reject No.	Found No.	AQL JUDGEMENT		
CRITICAL:	0	0	0	0	ACCEPT		
MAJOR:	1.0	2	3	0			
MINOR:	4.0	7	8	3			
NO.	DESCRIPTION OF DEFECT				CR	MA	MI
1	Scratch mark on inner surface				0	0	1
2	Scratch mark on surface				0	0	2
3							
4							
5							
6							
7							
	Total :				0	0	3

Remark:
1、All the unacceptable products above, MYLUX will rework.
2、The defective photos are as shown below.

(1) Defect Photo

	
1. Scratch mark on inner surface - minor	2. Scratch mark on surface - minor
	
3. Scratch mark on surface - minor	

(2) CRITICAL PARTS CHECK LIST

Object/ part NO.	Manufacturer	Type	Technical data	Certification	RESULT	PHOTO
Supply cord	TOONG YEAN	H03VVH2-F	300/300V 2x0.75mm ²	CCC	P	
Plug	/	TY-138	10A 250V	/	P	
Motor	/	M76430AV2223 P160F	AC220-230V 50-60Hz 900W	/	P	
Capacitor	MEX/TENTA	MKP	0.33uF K X2 275VAC 40/100/21	VDE ENEC ICC CQC UL	P	
Interlock Switch	Ushun	KW-5	10. 1A 125/250VAC 10(5) A 125/250VAC uT125	UL TUV CB CQC	P	
ON/OFF Switch	/	KAN-9-CC-1	10(3)A 250VAC 1E4 25T85	TUC ICC CE	P	

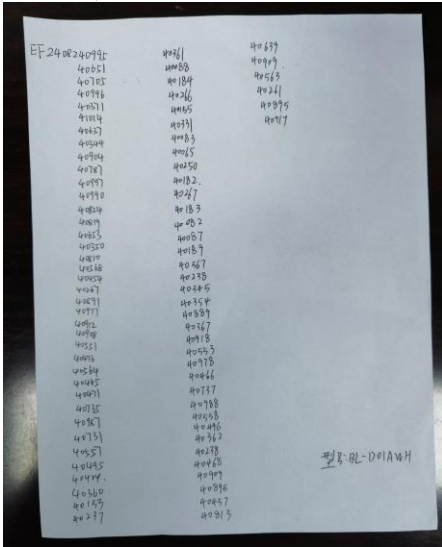
(3) Check the CDF record photos

Motor	—	M76430AV2223 P160F	AC220-230V 50-60Hz 900W 2024 04.08	—	—
Supply cord	TOONG YEAN	H03VVH2-F	300/300V 2x0.75mm ²	—	CCC
Plug	—	TY-138	10A 250V	—	—
ON/OFF Switch	—	KAN-9-CC-1	10(3)A 250VAC 1E4 25T85	—	TUC ICC CE
Capacitor	MEX/TENTA	MKP	0.33uF K X2 275VAC 40/100/21	EN60384-14	VDE ENEC ICC CQC UL
Interlock Switch	Ushun	KW-5	10. 1A 125/250VAC 10(5)A 125/250VAC uT125	—	UL TUV CB CQC

Remark:

The "CRITICAL PARTS CHECK LIST" and "Check the CDF record photos "are based on the BPS test report (report No. TR-SUP4B-24-01-A)

(4) SERIAL NUMBER of INSPECTED UNITS

SERIAL NUMBER FORMAT AND RANGE:	The numbers below										
											

(5) DATA TEST

NO.	Test Item \Serial NO.	0995	0371	0637	0904	0824	0653	0568	0454	Blank	Blank
1	Rated Power NO-load power (250-350W)	300	306	310	307	305	298	308	296	Blank	Blank
	500mL load rated water test load power (640-753W)	718	714	722	723	728	715	717	721	Blank	Blank
	700mL load rated water test load power (780-900W)	821	826	817	819	822	828	821	819	Blank	Blank
2	Blending Water Test (1min)	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	Blank	Blank
3	Jar Leakage Test (1Hour)	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	Blank	Blank

Remark

The items (number1 to 3) are tested according to the S-2 standard,8 products are selected for testing, and the test results are as above.

NO.	Test Item \Serial NO.	0267	0977	0551	0471	0987	0557	0424	0153	0088	0266
4	Electric Strength (1500V/3mA/2s)	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS
5	Leakege Current Test ($\leq 0.25\text{mA}$)	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS
6	Cord Length ($85\pm 5\text{cm}$)	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS

Remark

1、The above items (number4 to 6) are tested according to the G II standard, and the data is only part of the test results, because the space limit does not show all the results.

NO.	Test Item \Serial NO.	0155	0331
7	No-load Speed Test (18810-22990rpm)	20211rpm	20773rpm
NO.	Test Item \Serial NO.	0182	0267
8	Noise Test $\leq 90\text{dB}$ (1m, 700mL)	77.7dB	78.8dB



INSPECTION REPORT

4/5

REPORT NO. : [LZX20240823-2](#)

NO.	Test Item \Serial NO.	0189			0889	
9	Jar Container Capacity 700mL±35mL	701.5mL			701.0mL	
	Jar Container Capacity 500mL±25mL	501.0mL			501.5mL	
Remark	The items (number7 to 9) are tested according to the Finished product inspection specification,2 products are selected for testing, and the test results are as above.					
NO.	Test Item \Serial NO.	0918	0466	0558	0362	0909
10	Press the button force: 0.7-2.3kgf	1.4	1.2	1.3	1.4	1.4
	Jar lid and filp lid: Locking force is 1.5-3kgf.cm	1.9	2.2	2.0	1.9	2.2
	Jar lid and filp lid: Un-locking force is 0.3-2.2kgf.cm	1.7	1.8	2.0	1.8	1.9
	Jar base and main housing: Locking force is 23-37kgf.cm, and the un-locking force is 2.6-18kgf.cm	Pass	Pass	Pass	Pass	Pass
	Jar and jar base: Locking force is 25kgf.cm, and the un-locking force is 15-30kgf.cm	Pass	Pass	Pass	Pass	Pass
Remark	The item (number10) is tested according to the Finished product inspection specification, 5 products are selected for testing, and the test results are as above.					
NO.	Test Item \Serial NO.	0813				
11	Power cord tension as per IEC60335-1 requirement ≥6kgf	Pass				
NO.	Test Item \Serial NO.	ALL				
12	Function test: With 6kg loading, blending 700mL water for 1min.	Pass				
(6) INFORMATION CHECK LIST						
NO.	Item	DETAILS/POSITION				Result



INSPECTION REPORT

5/5

REPORT NO. : [LZX20240823-2](#)

1	VOLTAGE SYSTEM	220-230V, 50-60Hz, 900W	P
2	BAR CODE	ON GIFT BOX 8809686403387	P
3	ACCESSORIES	User manual*1、Jar (500mL) *2、Jar (700mL) *1、Cup cap*2、Blade base with blade*1	P
4	Printing	The PE bags and user manual printing match the reference drawings	P
(7) OTHER			
Item	Inspection Standard	DETAILS	结果 Result
Drop Test	ISTA-1A	Carton Box GROSS WEIGHT: 3.54kg DROP TEST SEQUENCE: 760mm SAFETY : PASS FUNCTION : PASS APPEARANCE : PASS	P
Carton size	361×227×353mm	365×235×360mm	P
Gift Box Size	346×215×333mm	350×220×335mm	P
HOTOEM Information Technology Company Limited		Liang Zixuan	Li Yanlin
REPORTED BY		INSPECTOR' S SIGNATURE	FACTORY' S REPRESENTATIVE SIGNATURE