

Product Name	Blender	Factory	MYLUX	Date	2025/11/20
P. O. No.	LS_H251014	Product Rating	220-230V, 50-60Hz, 900W	Factory Model No.	Y-938
Customer Model No.	BL-D01CTG	Destination	VIETNAM	Brand	HUROM
Order Qty	2010PCS	Standby Qty	0	INSP. QTY.	2010PCS
Sampling INSP. QTY.	125PCS	Serial No. : EF2511230001-EF2511232010			

INSPECTION STANDARD: Finished product inspection specification NO:QA-23-109-012 version: 02

ISO2859 General Inspection, Level II, Normal, Single Sampling Plan

Acceptance Quality Level		Accept No.	Reject No.	Found No.	AQL JUDGEMENT
CRITICAL:	0	0	0	0	ACCEPT
MAJOR:	1.0	3	4	0	
MINOR:	4.0	10	11	5	

NO.	DESCRIPTION OF DEFECT	CR	MA	MI
1	Poor coating on base	0	0	1
2	Glue mark on base	0	0	1
3	Scratch mark on base	0	0	1
4	Dirt mark on base	0	0	2
5				
6				
7				
Total :		0	0	5

Remark:

- 1、All the unacceptable products above, MYLUX will rework.
- 2、The defective photos are as shown below.



(1) Defect Photo

	
1. Poor coating on base - minor	2. Glue mark on base - minor
	
3. Scratch mark on base - minor	4. Dirt mark on base - minor



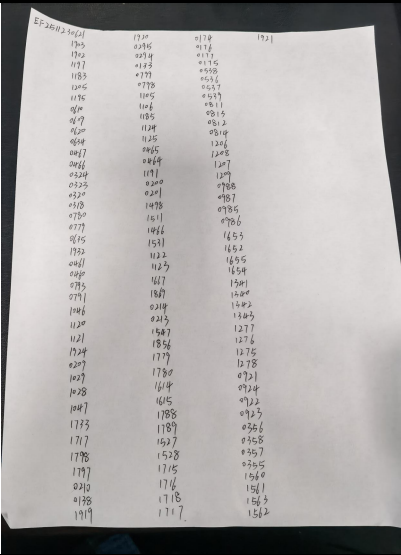
5. Dirt mark on base - minor

(2) CRITICAL PARTS CHECK LIST

Object/ part NO.	Manufacturer	Type	Technical data	Certification	RESULT	PHOTO
Supply cord	Toong Yean Plastic Ind. Co., Ltd.	H03VVH2-F (60227 IEC 52)	2x0.75mm ²	VDE 40024356	P	
Plug	Toong Yean Plastic Ind. Co., Ltd.	TY-019	250V~, 16A	VDE 40002153	P	
Motor	Xiamen YOUo Intelligent Technology Co., Ltd.	M7643CAV22 23P160F	AC220-230V 50-60Hz 900W, Class F	/	P	
Motor protector	You Xian Lian Cheng Electron Co. Ltd.	17AM1 039A5+PTC	AC 250 V, 160 ℃	VDE 40028660	P	
Y-Capacitor	JYH HSU (JEC) ELECTRONICS LTD	JY	Y2, 4700pF, 40/125/21	VDE 40038643	P	
Capacitor	Tenta Electric Industrial Co., Ltd.	MKP	0.33μF, 275VAC, X2, 40/100/21	VDE 119119	P	
Interlock Switch	GUANGDONG YUSHUN ELECTRIC APPLIANCE LTD	KW-5	10.1A, 125/250V~, 3E4, T125; 10(5)A, 125/250V~, 1E4, T125, GWT 850	CN 52651	P	
Power switch	Zhejiang Jialong Electron Co., Ltd.	KAN-9-CC-1	250VAC, 10(3)A, T85, 1E4, GWT 850	TUV R50533106	P	

(3) Check the CDF record photos					
Alternative	Toong Yean Plastic Ind. Co., Ltd.	TY-019	250V~, 16A	DIN VDE 0620-1 IEC 60884-1	VDE 40002153
Supply cord	Toong Yean Plastic Ind. Co., Ltd.	H03VVH2-F (60227 IEC 52)	2 x 0,75mm2	EN 50525-2-11 DIN VDE 0281-5	VDE 40024356
Motor	Xiamen YOUo Intelligent Technology Co., Ltd.	M7643CAV22 23P160F	AC220-230V 50- 60Hz 900W, Class F	IEC/EN 60335-1 IEC/ EN 60335- 2-14	Tested with appliance
- Motor protector	You Xian Lian Cheng Electron Co. Ltd.	17AM1 039A5+PTC	AC 250 V,160℃	IEC/EN 60730-1 IEC/EN 60730-2- 22	VDE 40028660
Alternative	JYH HSU (JEC) ELECTRONICS LTD	JY	Y2, 4700pF, 40/125/21	IEC/EN 60384-14	VDE 40038643
Alternative	Tenta Electric Industrial Co.,Ltd.	MEX	0.33μF, 275VAC, X2, 40/100/21	IEC/EN 60384-14	VDE 119119
Power switch	Zhejiang Jialong Electron Co., Ltd.	KAN-9-CC-1	250VAC, 10(3)A, T85, 1E4, GWT 850	IEC/EN 61058-1	TUV R50533106
Micro-switch/interlock Switch	GUANGDONG YUSHUN ELECTRIC APPLIANCE LTD	KW-5	10.1A, 125/250V~, 3E4, T125; 10(5)A, 125/250V~, 1E4, T125, GWT 850	IEC/EN 61058-1	CN 52651

Remark:
The "CRITICAL PARTS CHECK LIST" and "Check the CDF record photos "are based on the CE test report (report No. 230526005GZU-001)

(4) SERIAL NUMBER of INSPECTED UNITS	
SERIAL NUMBER FORMAT AND RANGE:	The numbers below
	

(5) DATA TEST

NO.	Test Item \Serial NO.	1902	1183	0609	0466	0320	0778	0460	1046	Blank	Blank
1	Rated Power NO-load power (250-350W)	306	309	302	305	307	312	308	310	Blank	Blank
	500mL load rated water test load power (623-836W)	710	714	708	711	717	709	705	706	Blank	Blank
	700mL load rated water test load power (790-957W)	874	868	866	871	864	868	873	871	Blank	Blank
2	Blending Water Test (1min)	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	Blank	Blank
3	Jar Leakage Test (1Hour)	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	Blank	Blank
Remark	The items (number1 to 3) are tested according to the S-2 standard,8 products are selected for testing, and the test results are as above.										
NO.	Test Item \Serial NO.	1029	1733	0210	1920	0798	1125	0464	1511	1667	0213
4	Electric Strength (1500V/3mA/2s)	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS
5	Leakege Current Test ($\leq$ 0.25mA)	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS
6	Cord Length (85 $\pm$ 5cm)	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS
Remark	1、The above items (number4 to 6) are tested according to the G II standard, and the data is only part of the test results, because the space limit does not show all the results.										
NO.	Test Item \Serial NO.	1856					1527				
7	No-load Speed Test (18810-22990rpm)	20327rpm					19762rpm				
NO.	Test Item \Serial NO.	1717					0175				
8	Noise Test $\leq$ 90dB (1m, 700mL)	80.0dB					80.7dB				
NO.	Test Item \Serial NO.	0537					0812				
9	Jar Container Capacity 700mL $\pm$ 35mL	699.0mL					699.5mL				
	Jar Container Capacity 500mL $\pm$ 25mL	498.5mL					499.0mL				
Remark	The items (number7 to 9) are tested according to the Finished product inspection specification,2 products are selected for testing, and the test results are as above.										
NO.	Test Item \Serial NO.	1207		0987		1655		1341		1278	
	Press the button force: 0.7-2.3kgf	1.3		1.3		1.2		1.3		1.2	



INSPECTION REPORT

5/5

REPORT NO. : LZX20251120-1

10	Jar lid and filp lid: Locking force is 1.5-3kgf.cm	1.8	2.0	1.8	1.9	1.9
	Jar lid and filp lid: Un-locking force is 0.3-2.2kgf.cm	1.8	1.9	1.8	2.0	1.8
	Jar base and main housing: Locking force is 23-37kgf.cm, and the un-locking force is 2.6-18kgf.cm	Pass	Pass	Pass	Pass	Pass
	Jar and jar base: Locking force is 25kgf.cm, and the un-locking force is 15-30kgf.cm	Pass	Pass	Pass	Pass	Pass
Remark	The item (number10) is tested according to the Finished product inspection specification, 5 products are selected for testing, and the test results are as above.					
NO.	Test Item \Serial NO.	0923				
11	Power cord tension as per IEC60335-1 requirement ≥6kgf	Pass				
(6) INFORMATION CHECK LIST						
NO.	Item	DETAILS/POSITION				Result
1	VOLTAGE SYSTEM	220-230V, 50-60Hz, 900W				P
2	BAR CODE	ON GIFT BOX 8809686403110				P
3	ACCESSORIES	User manual*1、Jar (500mL) *2、Jar (700mL) *1、Cup cap*2、Blade base with blade*1				P
4	Printing	The PE bags and user manual printing match the reference drawings				P
(7) OTHER						
Item	Inspection Standard	DETAILS				结果 Result
Drop Test	ISTA-1A	Carton Box GROSS WEIGHT: 6.94kg DROP TEST SEQUENCE: 760mm SAFETY : PASS FUNCTION : PASS APPEARANCE : PASS				P
Carton size	445×361×353mm	450×365×358mm				P
Gift Box Size	346×215×333mm	350×218×337mm				P
HOTOEM Information Technology Company Limited		Liang Zixuan		Li Yanlin		
REPORTED BY		INSPECTOR' S SIGNATURE		FACTORY' S REPRESENTATIVE SIGNATURE		