

Product Name	Blender	Factory	MYLUX	Date	2026/5/20
P.O. No.	LS_H260313VN	Product Rating	220-230V, 50-60Hz, 900W	Factory Model No.	Y-938
Customer Model No.	BL-D01CTG	Destination	VIETNAM	Brand	HUROM
Order Qty	2010PCS	Standby Qty	0	INSP. QTY.	2010PCS
Sampling INSP. QTY.	125PCS	Serial No. : EF2605170001-EF2605172010			

INSPECTION STANDARD: Finished product inspection specification NO:QA-23-109-012 version: 02

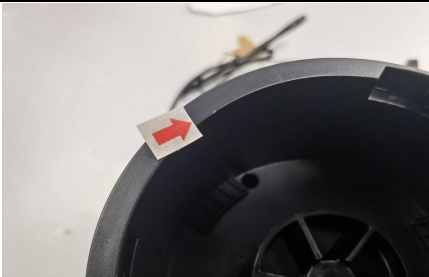
IS02859 General Inspection, Level II, Normal, Single Sampling Plan

Acceptance Quality Level		Accept No.	Reject No.	Found No.	AQL JUDGEMENT		
CRITICAL:	0	0	0	0	ACCEPT		
MAJOR:	1.0	3	4	0			
MINOR:	4.0	10	11	4			
NO.	DESCRIPTION OF DEFECT				CR	MA	MI
1	Poor assembly on base				0	0	1
2	Flow mark on base				0	0	1
3	Dent mark on base				0	0	2
4							
5							
6							
7							
	Total :				0	0	4


Remark:

- 1、All the unacceptable products above, MYLUX will rework.
- 2、The defective photos are as shown below.

(1) Defect Photo

	
1. Poor assembly on base - minor	2. Flow mark on base - minor
	
3. Dent mark on base - minor	4. Dent mark on base - minor

(2) CRITICAL PARTS CHECK LIST

Object/ part NO.	Manufacturer	Type	Technical data	Certification	RESULT	PHOTO
Supply cord	Toong Yean Plastic Ind. Co., Ltd.	H03VVH2-F (60227 IEC 52)	2x0.75mm ²	VDE 40024356	P	
Plug	Toong Yean Plastic Ind. Co., Ltd.	TY-019	250V~, 16A	VDE 40002153	P	
Motor	Xiamen YOo Intelligent Technology Co., Ltd.	M7643CAV22 23P160F	AC220-230V 50-60Hz 900W, Class F	/	P	
Motor protector	You Xian Lian Cheng Electron Co. Ltd.	17AM1 039A5+PTC	AC 250 V, 160 ℃	VDE 40028660	P	
Y-Capacitor	JYH HSU (JEC) ELECTRONICS LTD	JY	Y2, 4700pF, 40/125/21	VDE 40038643	P	
Capacitor	Tenta Electric Industrial Co.,Ltd.	MKP	0.33μF, 275VAC, X2, 40/100/21	VDE 119119	P	
Interlock Switch	GUANGDONG YUSHUN ELECTRIC APPLIANCE LTD	KW-5	10. 1A, 125/250V~, 3E4, T125; 10(5)A, 125/250V~, 1E4, T125, GWT 850	CN 52651	P	
Power switch	Zhejiang Jialong Electron Co., Ltd.	KAN-9-CC-1	250VAC, 10(3)A, T85, 1E4, GWT 850	TUV R50533106	P	

(3) Check the CDF record photos

Alternative	Toong Yean Plastic Ind. Co., Ltd.	TY-019	250V~, 16A	DIN VDE 0620-1 IEC 60884-1	VDE 40002153
Supply cord	Toong Yean Plastic Ind. Co., Ltd.	H03VVH2-F (60227 IEC 52)	2 x 0,75mm ²	EN 50525-2-11 DIN VDE 0281-5	VDE 40024356
Motor	Xiamen YOUo Intelligent Technology Co., Ltd.	M7643CAV22 23P160F	AC220-230V 50- 60Hz 900W, Class F	IEC/EN 60335-1 IEC/ EN 60335- 2-14	Tested with appliance
- Motor protector	You Xian Lian Cheng Electron Co. Ltd.	17AM1 039A5+PTC	AC 250 V,160℃	IEC/EN 60730-1 IEC/EN 60730-2- 22	VDE 40028660
Alternative	JYH HSU (JEC) ELECTRONICS LTD	JY	Y2, 4700pF, 40/125/21	IEC/EN 60384-14	VDE 40038643
Alternative	Tenta Electric Industrial Co.,Ltd.	MEX	0.33μF, 275VAC, X2, 40/100/21	IEC/EN 60384-14	VDE 119119
Power switch	Zhejiang Jialong Electron Co., Ltd.	KAN-9-CC-1	250VAC, 10(3)A, T85, 1E4, GWT 850	IEC/EN 61058-1	TUV R50533106
Micro-switch/interlock Switch	GUANGDONG YUSHUN ELECTRIC APPLIANCE LTD	KW-5	10.1A, 125/250V~, 3E4, T125; 10(5)A, 125/250V~, 1E4, T125, GWT 850	IEC/EN 61058-1	CN 52651

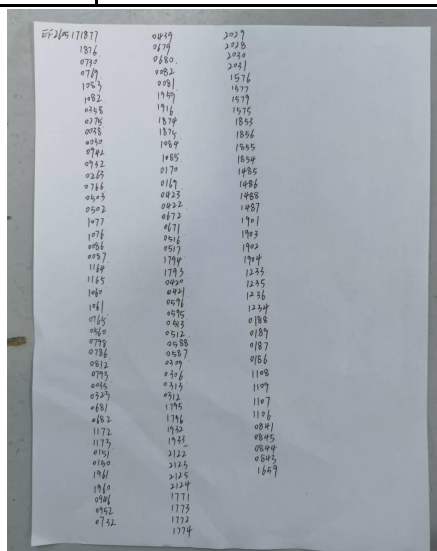
Remark:

The "CRITICAL PARTS CHECK LIST" and "Check the CDF record photos "are based on the CE test report (report No. 230526005GZU-001)

(4) SERIAL NUMBER of INSPECTED UNITS

SERIAL NUMBER FORMAT AND RANGE:

The numbers below



(5) DATA TEST

NO.	Test Item \Serial NO.	1877	1082	0030	0932	0503	1076	1061	0798	Blank	Blank
1	Rated Power NO-load power (250-350W)	321	319	328	331	326	329	316	318	Blank	Blank
	500mL load rated water test load power (623-836W)	683	694	677	684	689	675	679	681	Blank	Blank
	700mL load rated water test load power (790-957W)	814	818	813	806	811	815	822	820	Blank	Blank
2	Blending Water Test (1min)	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	Blank	Blank
3	Jar Leakage Test (1Hour)	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	Blank	Blank
Remark	The items (number1 to 3) are tested according to the S-2 standard,8 products are selected for testing, and the test results are as above.										
NO.	Test Item \Serial NO.	0323	0682	1173	1960	0732	0082	1875	0169	0422	0517
4	Electric Strength (1500V/3mA/2s)	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS
5	Leakege Current Test ($\leq$ 0.25mA)	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS
6	Cord Length (85 $\pm$ 5cm)	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS
Remark	1、The above items (number4 to 6) are tested according to the G II standard, and the data is only part of the test results, because the space limit does not show all the results.										
NO.	Test Item \Serial NO.	0421					0512				
7	No-load Speed Test (18810-22990rpm)	19380rpm					20146rpm				
NO.	Test Item \Serial NO.	0312					1933				
8	Noise Test $\leq$ 90dB (1m, 700mL)	77.7dB					78.6dB				
NO.	Test Item \Serial NO.	2124					1772				
9	Jar Container Capacity 700mL $\pm$ 35mL	700.5mL					701.0mL				
	Jar Container Capacity 500mL $\pm$ 25mL	500.5mL					500.5mL				
Remark	The items (number7 to 9) are tested according to the Finished product inspection specification,2 products are selected for testing, and the test results are as above.										
NO.	Test Item \Serial NO.	2029		1577		1855		1486		1901	
	Press the button force: 0.7-2.3kgf	1.1		1.2		1.0		1.2		0.9	

10	Jar lid and filp lid: Locking force is 1.5-3kgf.cm	2.1	2.0	1.9	1.9	2.0
	Jar lid and filp lid: Un-locking force is 0.3-2.2kgf.cm	1.4	1.4	1.5	1.6	1.4
	Jar base and main housing: Locking force is 23-37kgf.cm, and the un-locking force is 2.6-18kgf.cm	Pass	Pass	Pass	Pass	Pass
	Jar and jar base: Locking force is 25kgf.cm, and the un-locking force is 15-30kgf.cm	Pass	Pass	Pass	Pass	Pass

Remark	The item (number10) is tested according to the Finished product inspection specification, 5 products are selected for testing, and the test results are as above.
--------	---

NO.	Test Item \Serial NO.	1236
11	Power cord tension as per IEC60335-1 requirement ≥6kgf	Pass
NO.	Test Item \Serial NO.	ALL
12	Function test: With 6kg loading, blending 700mL water for 1min.	Pass

(6) INFORMATION CHECK LIST

NO.	Item	DETAILS/POSITION	Result
1	VOLTAGE SYSTEM	220-230V, 50-60Hz, 900W	P
2	BAR CODE	ON GIFT BOX 8809686403110	P
3	ACCESSORIES	User manual*1、Jar (500mL) *2、Jar (700mL) *1、Cup cap*2、Blade base with blade*1	P
4	Printing	The PE bags and user manual printing match the reference drawings	P

(7) OTHER

Item	Inspection Standard	DETAILS	结果 Result
Drop Test	ISTA-1A	Carton Box GROSS WEIGHT: 6.91kg DROP TEST SEQUENCE: 760mm SAFETY : PASS FUNCTION : PASS APPEARANCE : PASS	P
Carton size	445×361×353mm	450×363×356mm	P



INSPECTION REPORT

REPORT NO. : [LZX20260520-1](#)

Gift Box Size	346×215×333mm	350×218×335mm	P
HOTOEM Information Technology Company Limited	Liang Zixuan	Li Yanlin	
REPORTED BY	INSPECTOR' S SIGNATURE	FACTORY' S REPRESENTATIVE SIGNATURE	