

Product Name	Blender	Factory	MYLUX	Date	2025/9/11
P.O. No.	LS_H250717	Product Rating	220-230V, 50-60Hz, 900W	Factory Model No.	Y-938
Customer Model No.	BL-D01CWH	Destination	VIETNAM	Brand	HUROM
Order Qty	2010PCS	Standby Qty	0	INSP. QTY.	2010PCS
Sampling INSP. QTY.	125PCS	Serial No. : EF2508230001-EF2508232010			

INSPECTION STANDARD: Finished product inspection specification NO:QA-23-109-012 version: 02

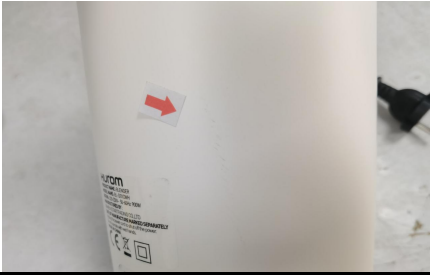
ISO2859 General Inspection, Level II, Normal, Single Sampling Plan

Acceptance Quality Level		Accept No.	Reject No.	Found No.	AQL JUDGEMENT		
CRITICAL:	0	0	0	0	ACCEPT		
MAJOR:	1.0	3	4	0			
MINOR:	4.0	10	11	9			
NO.	DESCRIPTION OF DEFECT				CR	MA	MI
1	Poor coating on base				0	0	1
2	Impurity on coating				0	0	1
3	Dirt mark on surface				0	0	4
4	Dirt mark on nameplate				0	0	1
5	Scratch mark on surface				0	0	2
6							
7							
	Total :				0	0	9

Remark:



- 1、All the unacceptable products above, MYLUX will rework.
- 2、The defective photos are as shown below.


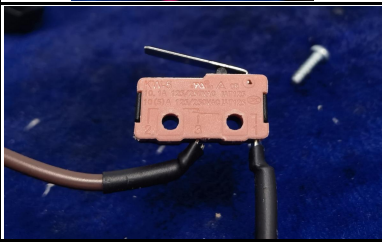
(1) Defect Photo

	
1. Poor coating on base - minor	2. Impurity on coating - minor
	
3. Dirt mark on surface - minor	4. Dirt mark on surface - minor

	
5. Dirt mark on surface - minor	6. Dirt mark on surface - minor
	
7. Dirt mark on nameplate - minor	8. Scratch mark on surface - minor
	
9. Scratch mark on surface - minor	

(2) CRITICAL PARTS CHECK LIST

Object/ part NO.	Manufacturer	Type	Technical data	Certification	RESULT	PHOTO
Supply cord	Toong Yean Plastic Ind. Co., Ltd.	H03VVH2-F (60227 IEC 52)	2x0.75mm ²	VDE 40024356	P	
Plug	Toong Yean Plastic Ind. Co., Ltd.	TY-019	250V~, 16A	VDE 40002153	P	
Motor	Xiamen YOUo Intelligent Technology Co., Ltd.	M7643CAV22 23P160F	AC220-230V 50-60Hz 900W, Class F	/	P	
Motor protector	You Xian Lian Cheng Electron Co. Ltd.	17AM1 039A5+PTC	AC 250 V, 160 ℃	VDE 40028660	P	
Y-Capacitor	JYH HSU (JEC) ELECTRONICS LTD	JY	Y2, 4700pF, 40/125/21	VDE 40038643	P	

Capacitor	Tenta Electric Industrial Co., Ltd.	MKP	0.33 μ F, 275VAC, X2, 40/100/21	VDE 119119	P	
Interlock Switch	GUANGDONG YUSHUN ELECTRIC APPLIANCE LTD	KW-5	10.1A, 125/250V~, 3E4, T125; 10(5)A, 125/250V~, 1E4, T125, GWT 850	CN 52651	P	
Power switch	Zhejiang Jialong Electron Co., Ltd.	KAN-9-CC-1	250VAC, 10(3)A, T85, 1E4, GWT 850	TUV R50533106	P	

(3) Check the CDF record photos

Alternative	Toong Yean Plastic Ind. Co., Ltd.	TY-019	250V~, 16A	DIN VDE 0620-1 IEC 60884-1	VDE 40002153
Supply cord	Toong Yean Plastic Ind. Co., Ltd.	H03VVH2-F (60227 IEC 52)	2 x 0,75mm2	EN 50525-2-11 DIN VDE 0281-5	VDE 40024356
Motor	Xiamen YOUo Intelligent Technology Co., Ltd.	M7643CAV22 23P160F	AC220-230V 50- 60Hz 900W, Class F	IEC/EN 60335-1 IEC/ EN 60335- 2-14	Tested with appliance
- Motor protector	You Xian Lian Cheng Electron Co. Ltd.	17AM1 039A5+PTC	AC 250 V,160°C	IEC/EN 60730-1 IEC/EN 60730-2- 22	VDE 40028660
Alternative	JYH HSU (JEC) ELECTRONICS LTD	JY	Y2, 4700pF, 40/125/21	IEC/EN 60384-14	VDE 40038643
Alternative	Tenta Electric Industrial Co., Ltd.	MEX	0.33 μ F, 275VAC, X2, 40/100/21	IEC/EN 60384-14	VDE 119119
Power switch	Zhejiang Jialong Electron Co., Ltd.	KAN-9-CC-1	250VAC, 10(3)A, T85, 1E4, GWT 850	IEC/EN 61058-1	TUV R50533106
Micro-switch/interlock Switch	GUANGDONG YUSHUN ELECTRIC APPLIANCE LTD	KW-5	10.1A, 125/250V~, 3E4, T125; 10(5)A, 125/250V~, 1E4, T125, GWT 850	IEC/EN 61058-1	CN 52651

Remark:

The "CRITICAL PARTS CHECK LIST" and "Check the CDF record photos "are based on the CE test report (report No. 230526005GZU-001)

(4) SERIAL NUMBER of INSPECTED UNITS

SERIAL NUMBER FORMAT AND RANGE:	The numbers below
---------------------------------	-------------------

1.	1279	953	1280	246	870	1118	1116	1196	1176	567
2.	568	967	966	120	665	1081	960	268	267	1931
3.	1930	1191	1192	1197	1198	1331	1332	1634	1521	1825
4.	1854	1522	1855	1763	1762	1770	1771	1662	1661	1425
5.	1426	1920	1921	1520	1519	1844	1845	800	801	1359
6.	1366	501	500	1598	1597	503	657	656	723	724
7.	1102	356	357	1104	502	171	172	176	431	430
8.	179	236	237	69	85	429	656	1595	64	70
9.	408	574	573	1032	720	719	956	799	798	1176
10.	1175	1675	1676	1345	1346	352	353	954	879	880
11.	201	202	409	56	56	408	889	856	855	890
12.	731	732	127	704	703	128	128	128	1640	1639
13.	1571	1427	1512	1428						

(5) DATA TEST

NO.	Test Item \Serial NO.	1279	1930	1426	1102	0428	0201	0731	0967	Blank	Blank
1	Rated Power NO-load power (250-350W)	306	304	309	302	304	310	302	307	Blank	Blank
	500mL load rated water test load power (623-836W)	657	660	654	658	663	661	659	656	Blank	Blank
	700mL load rated water test load power (790-957W)	815	809	811	813	807	809	813	814	Blank	Blank
2	Blending Water Test (1min)	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	Blank	Blank
3	Jar Leakage Test (1Hour)	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	Blank	Blank
Remark	The items (number1 to 3) are tested according to the S-2 standard, 8 products are selected for testing, and the test results are as above.										
NO.	Test Item \Serial NO.	1522	1920	0236	0574	0732	1427	0966	1855	0500	0237
4	Electric Strength (1500V/3mA/2s)	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS
5	Leakege Current Test ($\leq$ 0.25mA)	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS
6	Cord Length (85 ± 5 cm)	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS
Remark	1、The above items (number4 to 6) are tested according to the G II standard, and the data is only part of the test results, because the space limit does not show all the results.										
NO.	Test Item \Serial NO.	1676						1572			
7	No-load Speed Test (18810-22990rpm)	18879rpm						19031rpm			
NO.	Test Item \Serial NO.	0120						1763			
8	Noise Test ≤ 90 dB (1m, 700mL)	80.5dB						80.1dB			
NO.	Test Item \Serial NO.	1598						1104			

9	Jar Container Capacity 700mL±35mL	702mL		702mL		
	Jar Container Capacity 500mL±25mL	500mL		500mL		
Remark	The items (number7 to 9) are tested according to the Finished product inspection specification,2 products are selected for testing, and the test results are as above.					
NO.	Test Item \Serial NO.	1032	0055	0704	0655	1762
10	Press the button force: 0.7-2.3kgf	1.3	1.1	1.3	1.2	1.2
	Jar lid and filp lid: Locking force is 1.5-3kgf.cm	2.1	2.0	2.1	2.1	2.2
	Jar lid and filp lid: Un-locking force is 0.3-2.2kgf.cm	1.9	2.0	1.8	1.9	1.9
	Jar base and main housing: Locking force is 23-37kgf.cm, and the un-locking force is 2.6-18kgf.cm	Pass	Pass	Pass	Pass	Pass
	Jar and jar base: Locking force is 25kgf.cm, and the un-locking force is 15-30kgf.cm	Pass	Pass	Pass	Pass	Pass
Remark	The item (number10) is tested according to the Finished product inspection specification, 5 products are selected for testing, and the test results are as above.					
NO.	Test Item \Serial NO.	1597				
11	Power cord tension as per IEC60335-1 requirement ≥6kgf	Pass				
NO.	Test Item \Serial NO.	ALL				
12	Function test: With 6kg loading, blending 700mL water for 1min.	Pass				
(6) INFORMATION CHECK LIST						
NO.	Item	DETAILS/POSITION				Result
1	VOLTAGE SYSTEM	220-230V, 50-60Hz, 900W				P



INSPECTION REPORT

6/6

REPORT NO. : LZX20250911-2

2	BAR CODE	ON GIFT BOX 8809686403103		P
3	ACCESSORIES	User manual*1、Jar (500mL) *2、Jar (700mL) *1、Cup cap*2 、 Blade base with blade*1		P
4	Printing	The PE bags and user manual printing match the reference drawings		P
(7) OTHER				
Item	Inspection Standard	DETAILS		结果 Result
Drop Test	ISTA-1A	Carton Box GROSS WEIGHT: 7.04kg DROP TEST SEQUENCE: 760mm SAFETY : PASS FUNCTION : PASS APPEARANCE : PASS		P
Carton size	445×361×353mm	448×363×355mm		P
Gift Box Size	346×215×333mm	350×218×335mm		P
HOTOEM Information Technology Company Limited		Liang Zixuan	Li Yanlin	
REPORTED BY		INSPECTOR' S SIGNATURE	FACTORY' S REPRESENTATIVE SIGNATURE	