

Product Name	Blender	Factory	YOUo	Date	2024/5/16
P.O. No.	LS_H231010	Product Rating	230V, 50-60Hz, 900W	Factory Model No.	Y-938
Customer Model No.	BL-D01ETG	Destination	Germany	Brand	HUROM
Order Qty	1005PCS	Standby Qty	0	INSP. QTY.	1005PCS
Sampling INSP. QTY.	80PCS	Serial No. : EF2312150001-EF2312151005			

INSPECTION STANDARD: Finished product inspection specification NO:QA-23-109-012 version: 01

IS02859 General Inspection, Level II, Normal, Single Sampling Plan

Acceptance Quality Level		Accept No.	Reject No.	Found No.	AQL JUDGEMENT
CRITICAL:	0	0	0	0	ACCEPT
MAJOR:	1.0	2	3	1	
MINOR:	4.0	7	8	2	

NO.	DESCRIPTION OF DEFECT	CR	MA	MI
1	Foreign material on edge	0	1	0
2	Scratch mark on edge	0	0	1
3	Dirt mark on surface	0	0	1
4				
5				
6				
7				
Total :		0	1	2

Remark:

- 1、All the unacceptable products above, YOUo will rework.
- 2、The defective photos are as shown below.
- 3、The serial number and production date did not change, the production date is 2023.12.

(1) Defect Photo

	
1. Foreign material on edge - major	2. Scratch mark on edge - minjor
	

3. Dirt mark on surface - minor	

(2) CRITICAL PARTS CHECK LIST

Object/ part NO.	Manufacturer	Type	Technical data	Certification	RESULT	PHOTO
Supply cord	Toong Yean Plastic Ind. Co.,Ltd.	H03 VVH2-F (60227 IEC 52)	2x0.75mm ²	DIN VDE 0620- 1 IEC 60884-1	P	
Plug	Toong Yean Plastic Industrial Co.,Ltd.	TY-019	AC250V, 16A	EN 50525-2-11 DIN VDE 0281- 5	P	
Motor	Xiamen YOuo Intelligent Technology Co., Ltd	M7643CAV2223P 160F	AC220-230V 50- 60Hz 900W, Class F	IEC/EN 60335- 1 IEC/ EN 60335- 2-14	P	
Motor protector	You Xian Lian Cheng Electron Co.Ltd.	17AM1 039A5+PTC	AC 250V, 160°C	IEC/EN 60730- 1 IEC/EN 60730- 2- 22	P	
X-capacitor	Tenta Electric Industrial Co.,Ltd.	MEX	0.33μF, 275VAC, X2, 40/100/21	IEC/EN 60384- 14	P	
Y-capacitor	JYH HSU (JEC) ELECTRONICS LTD	JY	Y2, 4700pF, 40/125/21	IEC/EN 60384- 14	P	
Micro switch	Guangdong Yushun Electric Appliance Ltd.	KW-5	250V~, 5A, 3E4, T125	IEC	P	
Switch	Zhejiang Jialong Electron Co.,Ltd.	KAN-9-GG-1	250VAC, 10(3)A, T85, 1E4, GWT 850	IEC/EN 61058- 1	P	

(3) Check the CDF record photos

Alternative	Toong Yean Plastic Ind. Co., Ltd.	TY-019	250V~, 16A	DIN VDE 0620-1 IEC 60884-1	VDE 40002153
Supply cord	Toong Yean Plastic Ind. Co., Ltd.	H05VVH2-F (60227 IEC 53)	2 x 0,75mm ²	EN 50525-2-11 DIN VDE 0281-5	VDE 40024356
Motor	Xiamen YOUo Intelligent Technology Co., Ltd.	M7643CAV22 23P160F	AC220-230V 50- 60Hz 900W, Class F	IEC/EN 60335-1 IEC/ EN 60335- 2-14	Tested with appliance
- Motor protector	You Xian Lian Cheng Electron Co. Ltd.	17AM1 039A5+PTC	AC 250 V,160℃	IEC/EN 60730-1 IEC/EN 60730-2- 22	VDE 40028660
Alternative	JYH HSU (JEC) ELECTRONICS LTD	JY	Y2, 4700pF, 40/125/21	IEC/EN 60384-14	VDE 40038643
Alternative	Tenta Electric Industrial Co.,Ltd.	MEX	0.33μF, 275VAC, X2, 40/100/21	IEC/EN 60384-14	VDE 119119
Power switch	Zhejiang Jialong Electron Co., Ltd.	KAN-9-CC-1	250VAC, 10(3)A, T85, 1E4, GWT 850	IEC/EN 61058-1	TUV R50533106
Micro-switch/interlock Switch	GUANGDONG YUSHUN ELECTRIC APPLIANCE LTD	KW-5	10.1A, 125/250V~, 3E4, T125; 10(5)A, 125/250V~, 1E4, T125, GWT 850	IEC/EN 61058-1	CN 52651


Remark:

The "CRITICAL PARTS CHECK LIST" and "Check the CDF record photos "are based on the CB report (report No. 230526005GZU-001)

(4) SERIAL NUMBER of INSPECTED UNITS

SERIAL NUMBER FORMAT AND RANGE:

The numbers below

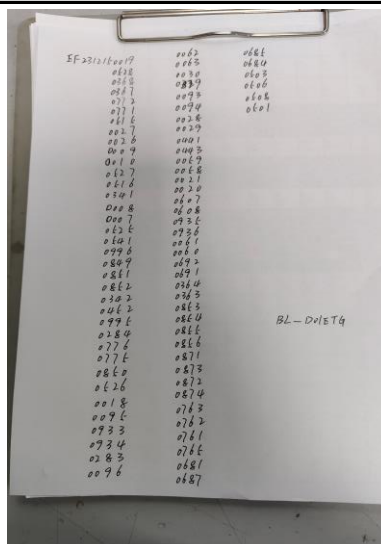

(5) DATA TEST

NO.	Test Item \Serial NO.	0019	0367	0772	0027	0527	0341	0451	0849	Blank	Blank
1	Rated Power NO-load power (250-350W)	297	301	294	299	307	304	311	295	Blank	Blank
	500mL load rated water test load power (640-753W)	696	699	705	701	696	700	691	698	Blank	Blank
	700mL load rated water test load power (780-900W)	792	786	799	797	789	785	802	799	Blank	Blank
2	Blending Water Test (1min)	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	Blank	Blank
3	Jar Leakage Test (1Hour)	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	Blank	Blank
Remark	The items (number1 to 3) are tested according to the S-2 standard,8 products are selected for testing, and the test results are as above.										
NO.	Test Item \Serial NO.	0852	0452	0776	0850	0526	0933	0283	0062	0330	0029
4	Electric Strength (1500V/3mA/2s)	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS
5	Leakege Current Test ($\leq$ 0.25mA)	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS
6	Cord Length (85 $\pm$ 5cm)	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS
Remark	1、The above items (number4 to 6) are tested according to the G II standard, and the data is only part of the test results, because the space limit does not show all the results.										
NO.	Test Item \Serial NO.	0441					0059				
7	No-load Speed Test (18810-22990rpm)	20587					21033				
NO.	Test Item \Serial NO.	0021					0608				
8	Noise Test $\leq$ 90dB (1m, 700mL)	78.1					79.2				
NO.	Test Item \Serial NO.	0935					0060				
9	Jar Container Capacity 700mL $\pm$ 35mL	701.3					700.9				
	Jar Container Capacity 500mL $\pm$ 25mL	500.8					501.3				
Remark	The items (number7 to 9) are tested according to the Finished product inspection specification,2 products are selected for testing, and the test results are as above.										
NO.	Test Item \Serial NO.	0692		0364		0853		0781		0762	
	Press the button force: 0.7-2.3kgf	0.9		1.1		0.9		0.8		1.0	

10	Jar lid and filp lid: Locking force is 0.5-2kgf.cm	0.9	1.0	0.9	0.9	1.1
	Jar lid and filp lid: Un-locking force is 0.2-1.8kgf.cm	0.4	0.6	0.5	0.5	0.6
	Jar base and main housing: Locking force is 23-37kgf.cm, and the un-locking force is 2.6-18kgf.cm	Pass	Pass	Pass	Pass	Pass
	Jar and jar base: Locking force is 25kgf.cm, and the un-locking force is 15-30kgf.cm	Pass	Pass	Pass	Pass	Pass

Remark	The item (number10) is tested according to the Finished product inspection specification, 5 products are selected for testing, and the test results are as above.					
--------	---	--	--	--	--	--

NO.	Test Item \Serial NO.	0685				
-----	-----------------------	------	--	--	--	--

11	Power cord tension as per IEC60335-1 requirement ≥6kgf	Pass				
----	--	------	--	--	--	--

NO.	Test Item \Serial NO.	ALL				
-----	-----------------------	-----	--	--	--	--

12	Function test: With no-loading, blending 700mL water for 1min.	Pass				
----	--	------	--	--	--	--

(6) INFORMATION CHECK LIST

NO.	Item	DETAILS/POSITION	Result
1	VOLTAGE SYSTEM	230V, 50-60Hz, 900W	P
2	BAR CODE	ON GIFT BOX 8809686402694	P
3	ACCESSORIES	User manual*1、Jar (500mL) *2、Jar (700mL) *1、Cup cap*2、Blade base with blade*1	P
4	Printing	The PE bags and user manual printing match the reference drawings	P

(7) OTHER

Item	Inspection Standard	DETAILS	结果 Result
Drop Test	ISTA-1A	Carton Box GROSS WEIGHT: 7.09kg DROP TEST SEQUENCE: 760mm SAFETY : PASS FUNCTION : PASS APPEARANCE : PASS	P
Carton size	445×361×353mm	445×365×360mm	P



INSPECTION REPORT

REPORT NO. : [LZX20240516-2](#)

Gift Box Size	346×215×333mm	350×215×335mm	P
HOTOEM Information Technology Company Limited	Liang Zixuan	Li Yanlin	
REPORTED BY	INSPECTOR' S SIGNATURE	FACTORY' S REPRESENTATIVE SIGNATURE	