

Product Name	Blender	Factory	MYLUX	Date	2024/11/28
P.O. No.	LS_H240830_2	Product Rating	230V, 50-60Hz, 900W	Factory Model No.	Y-938
Customer Model No.	BL-D01EWH	Destination	Germany	Brand	HUROM
Order Qty	4020PCS	Standby Qty	0	INSP. QTY.	4020PCS
Sampling INSP. QTY.	200PCS	Serial No. : EF2412010001-EF2412014020			

INSPECTION STANDARD: Finished product inspection specification NO:QA-23-109-012 version: 01

IS02859 General Inspection, Level II, Normal, Single Sampling Plan

Acceptance Quality Level		Accept No.	Reject No.	Found No.	AQL JUDGEMENT
CRITICAL:	0	0	0	0	ACCEPT
MAJOR:	1.0	5	6	0	
MINOR:	4.0	14	15	5	

NO.	DESCRIPTION OF DEFECT	CR	MA	MI
1	Scratch mark on surface	0	0	4
2	Dirt mark on surface	0	0	1
3				
4				
5				
6				
7				
Total :		0	0	5

Remark:

- 1、All the unacceptable products above, MYLUX will rework.
- 2、The defective photos are as shown below.

(1) Defect Photo

	
1. Scratch mark on surface - minor	2. Scratch mark on surface - minor
	
3. Scratch mark on surface - minor	4. Scratch mark on surface - minor



5. Dirt mark on surface - minor

(2) CRITICAL PARTS CHECK LIST

Object/ part NO.	Manufacturer	Type	Technical data	Certification	RESULT	PHOTO
Supply cord	Toong Yean Plastic Ind. Co., Ltd.	H03VVH2-F (60227 IEC 52)	2x0.75mm ²	VDE 40024356	P	
Plug	Toong Yean Plastic Ind. Co., Ltd.	TY-019	250V~, 16A	VDE 40002153	P	
Motor	Xiamen YOUo Intelligent Technology Co., Ltd.	M7643CAV22 23P160F	AC220-230V 50-60Hz 900W, Class F	/	P	
Motor protector	You Xian Lian Cheng Electron Co. Ltd.	17AM1 039A5+PTC	AC 250 V, 160 °C	VDE 40028660	P	
Y-Capacitor	JYH HSU (JEC) ELECTRONICS LTD	JY	Y2, 4700pF, 40/125/21	VDE 40038643	P	
Capacitor	Tenta Electric Industrial Co.,Ltd.	MKP	0.33μF, 275VAC, X2, 40/100/21	VDE 119119	P	
Interlock Switch	GUANGDONG YUSHUN ELECTRIC APPLIANCE LTD	KW-5	10.1A, 125/250V~, 3E4, T125; 10(5)A, 125/250V~, 1E4, T125, GWT 850	CN 52651	P	
Power switch	Zhejiang Jialong Electron Co., Ltd.	KAN-9-CC-1	250VAC, 10(3)A, T85, 1E4, GWT 850	TUV R50533106	P	

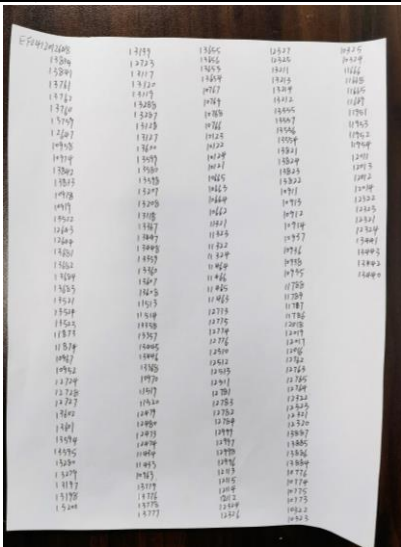
(3) Check the CDF record photos

Alternative	Toong Yean Plastic Ind. Co., Ltd.	TY-019	250V~, 16A	DIN VDE 0620-1 IEC 60884-1	VDE 40002153
Supply cord	Toong Yean Plastic Ind. Co., Ltd.	H03VVH2-F (60227 IEC 52)	2 x 0,75mm2	EN 50525-2-11 DIN VDE 0281-5	VDE 40024356
Motor	Xiamen YOUo Intelligent Technology Co., Ltd.	M7643CAV22 23P160F	AC220-230V 50- 60Hz 900W, Class F	IEC/EN 60335-1 IEC/ EN 60335- 2-14	Tested with appliance
- Motor protector	You Xian Lian Cheng Electron Co. Ltd.	17AM1 039A5+PTC	AC 250 V,160℃	IEC/EN 60730-1 IEC/EN 60730-2- 22	VDE 40028660
Alternative	JYH HSU (JEC) ELECTRONICS LTD	JY	Y2, 4700pF, 40/125/21	IEC/EN 60384-14	VDE 40038643
Alternative	Tenta Electric Industrial Co.,Ltd.	MEX	0.33μF, 275VAC, X2, 40/100/21	IEC/EN 60384-14	VDE 119119
Power switch	Zhejiang Jialong Electron Co., Ltd.	KAN-9-CC-1	250VAC, 10(3)A, T85, 1E4, GWT 850	IEC/EN 61058-1	TUV R50533106
Micro-switch/interlock Switch	GUANGDONG YUSHUN ELECTRIC APPLIANCE LTD	KW-5	10.1A, 125/250V~, 3E4, T125; 10(5)A, 125/250V~, 1E4, T125, GWT 850	IEC/EN 61058-1	CN 52651

Remark:

The "CRITICAL PARTS CHECK LIST" and "Check the CDF record photos "are based on the CE test report (report No. 230526005GZU-001)

(4) SERIAL NUMBER of INSPECTED UNITS

SERIAL NUMBER FORMAT AND RANGE:	The numbers below
	

(5) DATA TEST											
NO.	Test Item \Serial NO.	3834	3762	2647	0958	3833	0919	2643	3682	Blank	Blank
1	Rated Power NO-load power (250-350W)	285	288	283	291	287	293	282	286	Blank	Blank
	500mL load rated water test load power (640-753W)	647	653	646	649	653	651	655	667	Blank	Blank
	700mL load rated water test load power (780-900W)	785	788	784	792	789	794	791	793	Blank	Blank
2	Blending Water Test (1min)	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	Blank	Blank
3	Jar Leakage Test (1Hour)	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	Blank	Blank
Remark	The items (number1 to 3) are tested according to the S-2 standard,8 products are selected for testing, and the test results are as above.										
NO.	Test Item \Serial NO.	3684	3524	1874	2728	3601	3595	3197	2723	3117	3287
4	Electric Strength (1500V/3mA/2s)	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS
5	Leakege Current Test (≤0.25mA)	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS
6	Cord Length (85±5cm)	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS
Remark	1、The above items (number4 to 6) are tested according to the G II standard, and the data is only part of the test results, because the space limit does not show all the results.										
NO.	Test Item \Serial NO.	3599					3207				
7	No-load Speed Test (18810-22990rpm)	20584rpm					19975rpm				
NO.	Test Item \Serial NO.	3118					3447				
8	Noise Test ≤90dB (1m, 700mL)	78.4dB					79.3dB				
NO.	Test Item \Serial NO.	1513					3357				
9	Jar Container Capacity 700mL±35mL	698.5mL					699.0mL				
	Jar Container Capacity 500mL±25mL	501.5mL					501.0mL				
Remark	The items (number7 to 9) are tested according to the Finished product inspection specification,2 products are selected for testing, and the test results are as above.										
NO.	Test Item \Serial NO.	3446		1519		2480		1434		0963	
	Press the button force: 0.7-2.3kgf	1.0		1.2		1.2		1.3		1.1	

10	Jar lid and filp lid: Locking force is 1.5-3kgf.cm	2.1	2.2	2.3	2.1	2.1
	Jar lid and filp lid: Un-locking force is 0.3-2.2kgf.cm	1.2	1.0	1.1	1.0	1.1
	Jar base and main housing: Locking force is 23-37kgf.cm, and the un-locking force is 2.6-18kgf.cm	Pass	Pass	Pass	Pass	Pass
	Jar and jar base: Locking force is 25kgf.cm, and the un-locking force is 15-30kgf.cm	Pass	Pass	Pass	Pass	Pass
Remark	The item (number10) is tested according to the Finished product inspection specification, 5 products are selected for testing, and the test results are as above.					
NO.	Test Item \Serial NO.	3778				
11	Power cord tension as per IEC60335-1 requirement ≥6kgf	Pass				

(6) INFORMATION CHECK LIST

NO.	Item	DETAILS/POSITION	Result
1	VOLTAGE SYSTEM	230V, 50-60Hz, 900W	P
2	BAR CODE	ON GIFT BOX 8809686402687	P
3	ACCESSORIES	User manual*1、Jar (500mL) *2、Jar (700mL) *1、Cup cap*2、Blade base with blade*1	P
4	Printing	The PE bags and user manual printing match the reference drawings	P

(7) OTHER

Item	Inspection Standard	DETAILS	结果 Result
Drop Test	ISTA-1A	Carton Box GROSS WEIGHT: 7.00kg DROP TEST SEQUENCE: 760mm SAFETY : PASS FUNCTION : PASS APPEARANCE : PASS	P
Carton size	445×361×353mm	448×363×358mm	P
Gift Box Size	346×215×333mm	350×218×337mm	P
HOTOEM Information Technology Company Limited		Liang Zixuan	Li Yanlin
REPORTED BY		INSPECTOR' S SIGNATURE	FACTORY' S REPRESENTATIVE SIGNATURE