

Product Name	Blender	Factory	MYLUX	Date	2025/10/16
P.O. No.	LS_H250818	Product Rating	220-230V, 50-60Hz, 900W	Factory Model No.	Y-938
Customer Model No.	BL-D01FWH	Destination	Korea	Brand	HUROM
Order Qty	2000PCS	Standby Qty	0	INSP. QTY.	2000PCS
Sampling INSP. QTY.	125PCS	Serial No. : EF2510150001-EF2510152000			

INSPECTION STANDARD: Finished product inspection specification NO:QA-23-109-012 version: 02

ISO2859 General Inspection, Level II, Normal, Single Sampling Plan

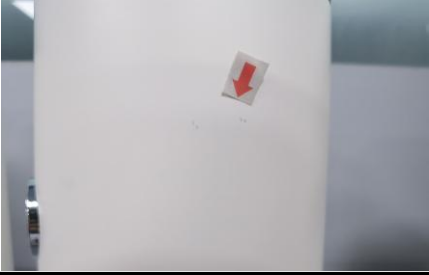
Acceptance Quality Level		Accept No.	Reject No.	Found No.	AQL JUDGEMENT
CRITICAL:	0	0	0	0	ACCEPT
MAJOR:	1.0	3	4	1	
MINOR:	4.0	10	11	6	

NO.	DESCRIPTION OF DEFECT	CR	MA	MI
1	Poor printing on LOGO	0	1	0
2	Poor printing on base	0	0	1
3	Dirt mark on base	0	0	2
4	Scratch mark on base	0	0	3
5				
6				
7				
Total :		0	1	6

Remark:
1、All the unacceptable products above, MYLUX will rework.
2、The defective photos are as shown below.

(1) Defect Photo

	
1. Poor printing on LOGO - major	2. Poor printing on base - minor
#NAME?	
3. Dirt mark on base - minor	4. Dirt mark on base - minor

	
5. Scratch mark on base - minor	6. Scratch mark on base - minor
	
7. Scratch mark on base - minor	

(2) CRITICAL PARTS CHECK LIST

Object/ part NO.	Manufacturer	Type	Technical data	Certification	RESULT	PHOTO
Supply cord	Toong Yean Plastic Ind. Co., Ltd.	H03 VVH2-F (60227 IEC 52)	2x0.75mm ²	KC	P	
Plug	Toong Yean Plastic Industrial Co., Ltd.	TY-019	AC250V, 16A	KC	P	
Motor	Xiamen YOUo Intelligent Technology Co., Ltd	M7643CAV2223P 160F	AC220-230V 50-60Hz 900W, Class F	/	P	
Motor protector	You Xian Lian Cheng Electron Co. Ltd.	17AM1 039A5+PTC	AC 250V, 160°C	IEC	P	
X-capacitor	Tenta Electric Industrial Co., Ltd.	MEX	0.33uF, 275VAC, X2, 40/100/21	IEC	P	
Y-capacitor	Jyh Chung	JY	Y2, 300V~, 4700pF, 40/125/21	IEC	P	
Micro switch	Guangdong Yushun Electric Appliance Ltd.	KW-5	250V~, 5A, 3E4, T125	IEC	P	

Switch	zhejiang Jialong Electron Co.,Ltd.	KAN-9-GG-1	250V~,10 (3) A, T85,10E3	IEC	P	
--------	---------------------------------------	------------	--------------------------------	-----	---	--

(3) Check the CDF record photos				
Power plug	Toong Yean Plastic Industrial Co., Ltd	TY-019	AC250 V, 16 A	KC
- (Alt.)	Toong Yean Plastic Ind. Co., Ltd.	H05 VVH2-F (60227 IEC 53)	2 x 0.75 mm2	KC
Motor	Xiamen YOUo Intelligent Technology Co., Ltd	M7643CAV22 23P160F	AC220 - 230 V 50 - 60 Hz 900 W, Class F	Tested with appliance
- Motor protector	You Xian Lian Cheng Electron Co. Ltd.	17AM1 039A5+PTC	AC 250 V, 160 ℃	IEC
- Y capacitor	Success Electronics Co Ltd	SF	Y2, 300 V ~, 4 700 pF, 40 / 125 / 56	IEC
- (Alt.)	Tenta Electric Industrial Co., Ltd.	MEX	0.33 μF, 275 VAC, X2, 40 / 100 / 21	IEC
Power switch	Zhejiang Jialong Electron Co., Ltd.	KAN-9-CC-1	250 VAC, 10(3) A, T85, 1E4, GWT 850	IEC
Micro-switch/interlock Switch	GUANGDONG YUSHUN ELECTRIC APPLIANCE LTD	KW-5	10.1A, 125 / 250 V ~, 3 E4, T125; 10(5) A, 125 / 250 V ~, 1E4, T125, GWT 850	IEC

Remark:
The "CRITICAL PARTS CHECK LIST" and "Check the CDF record photos "are based on the KC report (report No. HU071120-23014C)

(4) SERIAL NUMBER of INSPECTED UNITS	
SERIAL NUMBER FORMAT AND RANGE:	The numbers below

(5) DATA TEST											
NO.	Test Item \Serial NO.	0746	0917	1193	0578	0397	0076	0467	0240	Blank	Blank
1	Rated Power NO-load power (244-320W)	279	277	282	285	276	274	281	283	Blank	Blank
	500mL load rated water test load power (650-760W)	655	659	657	661	653	658	663	662	Blank	Blank
	700mL load rated water test load power (720-890W)	776	780	775	779	783	781	779	785	Blank	Blank
2	Blending Water Test (1min)	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	Blank	Blank
3	Jar Leakage Test (1Hour)	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	Blank	Blank
Remark	The items (number1 to 3) are tested according to the S-2 standard,8 products are selected for testing, and the test results are as above.										
NO.	Test Item \Serial NO.	0147	1587	1678	0931	1059	0075	1493	0992	0568	1310
4	Electric Strength (1500V/3mA/2s)	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS
5	Leakege Current Test (≤ 0.25mA)	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS
6	Cord Length (85±5cm)	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS
Remark	1、The above items (number4 to 6) are tested according to the G II standard, and the data is only part of the test results, because the space limit does not show all the results.										
NO.	Test Item \Serial NO.	0827					1117				
7	No-load Speed Test (18000-22000rpm)	19746rpm					19201rpm				
NO.	Test Item \Serial NO.	0581					1842				
8	Noise Test ≤90dB (1m, 700mL)	80.0dB					79.3dB				
NO.	Test Item \Serial NO.	0927					1134				
9	Jar Container Capacity 700mL±35mL	701.5mL					702.0mL				
	Jar Container Capacity 500mL±25mL	499.0mL					499.0mL				
Remark	The items (number7 to 9) are tested according to the Finished product inspection specification,2 products are selected for testing, and the test results are as above.										
NO.	Test Item \Serial NO.	0558		0272		1303		1536		0854	
	Press the button force: 0.7-2.3kgf	1.0		1.2		1.2		1.1		1.3	



INSPECTION REPORT

5/5

REPORT NO. : LZX20251016-1

10	Jar lid and filp lid: Locking force is 1.5-3kgf.cm	1.8	1.8	1.7	1.6	1.8
	Jar lid and filp lid: Un-locking force is 0.3-2.2kgf.cm	1.1	1.2	1.1	1.2	1.2
	Jar base and main housing: Locking force is 23-37kgf.cm, and the un-locking force is 2.6-18kgf.cm	Pass	Pass	Pass	Pass	Pass
	Jar and jar base: Locking force is 25kgf.cm, and the un-locking force is 15-30kgf.cm	Pass	Pass	Pass	Pass	Pass
Remark	The item (number10) is tested according to the Finished product inspection specification, 5 products are selected for testing, and the test results are as above.					
NO.	Test Item \Serial NO.	0413				
11	Power cord tension as per IEC60335-1 requirement ≥6kgf	Pass				

(6) INFORMATION CHECK LIST

NO.	Item	DETAILS/POSITION	Result
1	VOLTAGE SYSTEM	220-230V, 50-60Hz, 900W	P
2	BAR CODE	ON GIFT BOX 8809686402618	P
3	ACCESSORIES	User manual*1、Jar (500mL) *2、Jar (700mL) *1、Cup cap*2、Blade base with blade*1	P
4	Printing	The PE bags and user manual printing match the reference drawings	P

(7) OTHER

Item	Inspection Standard	DETAILS	结果 Result
Drop Test	ISTA-1A	Carton Box GROSS WEIGHT: 7.03kg DROP TEST SEQUENCE: 760mm SAFETY : PASS FUNCTION : PASS APPEARANCE : PASS	P
Carton size	445×361×353mm	448×363×355mm	P
Gift Box Size	346×215×333mm	350×218×337mm	P
HOTOEM Information Technology Company Limited		Liang Zixuan	Li Yanlin
REPORTED BY		INSPECTOR' S SIGNATURE	FACTORY' S REPRESENTATIVE SIGNATURE