

Product Name	Blender	Factory	MYLUX	Date	2025/9/11
P. O. No.	LS_H250707	Product Rating	220-240V 50-60Hz 1000W	Factory Model No.	Y-928
Customer Model No.	BL-E01EMG	Destination	GERMANY	Brand	HUROM
Order Qty	754PCS	Standby Qty	0	INSP. QTY.	754PCS
Sampling INSP. QTY.	80PCS	Serial No. : EF2509130001-EF2509130754			

INSPECTION STANDARD: Finished product inspection specification NO:QA-25-109-008 version: 01

ISO2859 General Inspection, Level II, Normal, Single Sampling Plan

Acceptance Quality Level		Accept No.	Reject No.	Found No.	AQL JUDGEMENT
CRITICAL:	0	0	0	0	ACCEPT
MAJOR:	1.0	2	3	0	
MINOR:	4.0	7	8	5	


NO.	DESCRIPTION OF DEFECT	CR	MA	MI
1	Flash on inside	0	0	1
2	Scratch mark on surface	0	0	3
3	Scratch mark on button	0	0	1
4				
5				
6				
7				
Total :		0	0	5

Remark:

- 1、All the unacceptable products above, MYLUX will rework.
2、The defective photos are as shown below.

(1) Defect Photo

	
1. Flash on inside - Minor	2. Scratch mark on surface - Minor
	
3. Scratch mark on surface - Minor	4. Scratch mark on surface - Minor

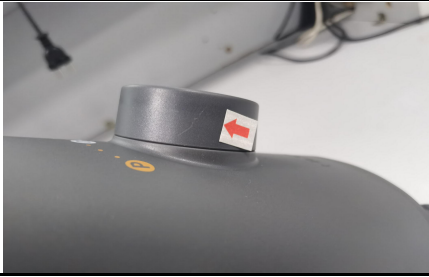

5. Scratch mark on button - Minor

(2) CRITICAL PARTS CHECK LIST

Object/ part NO.	Manufacturer	Type	Technical data	Certification	RESULT	PHOTO
Power cord	Toong Yean Plastic Ind. Co.,Ltd.	H03VVH2-F (60227 IEC 52)	2 x 0,5mm ² (Cord length< 2m) 2 x 0,75mm ²	EN 50525-2-11 DIN VDE 0281- 5	P	
Plug	Toong Yean Plastic Ind. Co.,Ltd.	TY-019	250V~, 16A	DIN VDE 0620- 1 IEC 60884-1	P	
Motor	XIAMEN MYLUX INTELLIGENT TECHNOLOGY CO., LTD.	M7643CA2224P1 60F	AC220-240V 50 60Hz 1000W Class F	EN 60335-1 EN 60335-2-14	P	
Motor Protector	You Xian Lian Cheng Electron Co. Ltd.	17AM1039A5+PT C	AC 250 V, 160 °C	EN 60730-1 EN 60730-2-22	P	
X-capacitor	Tenta Electric Industrial Co., Ltd.	MEX	0.33μF, 275VAC, X2, 40/100/21	EN 60384-14	P	
Y-capacitor	JYH HSU(JEC) ELECTRONICS LTD	JY	Y2, 4700pF, 40/125/21	EN 60384-14	P	
Micro switch	GUANGDONG YUSHUN ELECTRIC APPLIANCE LTD	KW-5	10(5)A, 125/250V~, 1E4, T125, GWT 850	EN 61058-1	P	
Power Switch	ZHEJIANG JIALONG ELECTRON CO., LTD	RV-15	250VAC, 6(4)A, T125, 1E4	EN 61058-1	P	

PCB	XIAMEN TOPSUN ELECTRONIC TECHNOLOGY CO LTD	TS-002, TS-003	Min. thickness: 1.0mm, V-0	EN 60335-1 EN 60335-2-14	P	
-----	--	----------------	----------------------------------	-----------------------------	---	---

(3) Check the CDF record photos

Alternative	Toong Yean Plastic Ind. Co., Ltd.	TY-019	250V~, 16A	DIN VDE 0620-1 IEC 60884-1	VDE 40002153
	Toong Yean Plastic Ind. Co., Ltd.	H03VVH2-F (60227 IEC 52)	2 x 0,5mm ² (Cord length< 2m) 2 x 0,75mm ²	EN 50525-2-11 DIN VDE 0281-5	VDE 40024356
	Toong Yean Plastic Ind. Co., Ltd.	H05VVH2-F (60227 IEC 53)	2 x 0,75mm ²	EN 50525-2-11 DIN VDE 0281-5	VDE 40024356
Motor	XIAMEN MYLUX INTELLIGENT TECHNOLOGY CO., LTD.	M7643CA222 4P160F	AC220-240V 50- 60Hz 1000W Class F	EN 60335-1 EN 60335-2-14	Tested with appliance
- Motor protector	You Xian Lian Cheng Electron Co. Ltd.	17AM1 039A5+PTC	AC 250 V, 160°C	EN 60730-1 EN 60730-2-22	VDE 40028660
Alternative	JYH HSU (JEC) ELECTRONICS LTD	JY	Y2, 4700pF, 40/125/21	EN 60384-14	VDE 40038643
Alternative	Tenta Electric Industrial Co.,Ltd.	MEX	0.33μF, 275VAC, X2, 40/100/21	EN 60384-14	VDE 119119
Alternative	ZHEJIANG JIALONG ELECTRON CO.,LTD	RV-15	250VAC, 6(4)A, T125, 1E4	EN 61058-1	TUV R50408240
Micro-switch	GUANGDONG YUSHUN ELECTRIC APPLIANCE LTD	KW-5	10(5)A, 125/250V~, 1E4, T125, GWT 850	EN 61058-1	CN52651- A1/M1
PCB	XIAMEN TOPSUN ELECTRONIC TECHNOLOGY CO LTD	TS-002, TS-003	Min. thickness: 1.0 mm, V-0	EN 60335-1 EN 60335-2-14	Tested with the appliance UL E252242

Remark:

The "CRITICAL PARTS CHECK LIST" and "Check the CDF record photos "are based on the CE report (report No. EFSH24120023-IE-01-L01)

(4) SERIAL NUMBER of INSPECTED UNITS

SERIAL NUMBER FORMAT AND RANGE:	The numbers below
---------------------------------	-------------------

0584	0216	0450	0006
0514	0215	0747	0199
0513	0271	0618	0112
0517	0008	0438	0177
0518	0202	0668	0157
0516	0173	0301	0090
0208	0247	0516	
0216	0150	0218	0036
0041	0444	0571	
0516	0101	0350	
0381	0200	0350	
0439	0049	0647	
0733	0069	0428	
0672	0067	0215	
0291	0001	0016	
0216	0223	0017	
0466	0150	0018	
0434	0070	0700	
0300	0048	0612	
0046	0170	0619	
0209	0154	0305	
0666	0115	0820	
0423	0289	0811	
0435	0445	0412	
0517	0366	0035	

BL-E01E M4

(5) DATA TEST

[illegible]

NO.	Test Item \Serial NO.	0046	0219	0442	0517	0215	0068	0373	0249	0141	0049
6	Hi-Pot Check (1500V/5mA/2s)	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS
7	Leakege Current Test (≤ 0.25mA)	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS
8	Cord Length (85±5cm)	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS
Remark	1、The above items (number6 to 8) are tested according to the G II standard, and the data is only part of the test results, because the space limit does not show all the results.										
NO.	Test Item \Serial NO.	0223					0448				
9	No-load Speed Test (21240-25960rpm)	22726rpm					22988rpm				
NO.	Test Item \Serial NO.	0354					0289				
10	Noise Test ≤90dB, 1m	80.1dB					79.6dB				
NO.	Test Item \Serial NO.	0566					0747				
11	Tumbler Capacity: 600mL±30mL	605mL					605mL				
	1500ML blending jar Capacity: 1500±75mL	1436mL					1438mL				
Remark	The items (number9 to 11) are tested according to the Finished product inspection specification,2 products are selected for testing, and the test results are as above.										
NO.	Test Item \Serial NO.	0438		0301		0298		0590		0428	
	Knob: Setting 1 force: 0.2-1.7kgf.cm; Setting 2 force: 0.2- 2.0kgf.cm Setting P force: 0.3- 2.5kgf.cm.	PASS		PASS		PASS		PASS		PASS	
	Blending jar assembly and main base: Locking force is 10-35kgf.cm and un-lockingforce is 25- 55kgf.cm.	PASS		PASS		PASS		PASS		PASS	
	Blending jar and jar base: Locking force is 30kgf.cm. And un-locking force is 18.5-30kgf.cm.	PASS		PASS		PASS		PASS		PASS	
	Blending jar and jar lid: Open force is 1.3- 4kgf.cm, and close force is 0.8-4kgf.cm.	PASS		PASS		PASS		PASS		PASS	

12	Blending jar lid and cap: Locking force is 1.5-17.5kgf.cm and un-locking force is 2.5-17.5kgf.cm.	PASS	PASS	PASS	PASS	PASS
	Grinder and grinder base: Locking force is 30kgf.cm, and un-locking force is 12.5-31.5kgf.cm.	PASS	PASS	PASS	PASS	PASS
	Grinder assembly and main base: Locking force is 5-30kgf.cm and un-locking force is 5-30kgf.cm.	PASS	PASS	PASS	PASS	PASS
	Chopper and chopper base: Locking force is $\leq$ 30kgf.cm and un-locking force is 15-35kgf.cm.	PASS	PASS	PASS	PASS	PASS
	Chopper assembly and main base: Locking force is 5-30kgf.cm and un-locking force is 5-30kgf.cm.	PASS	PASS	PASS	PASS	PASS
	Tumbler lid and jar: Locking force is 30kgf.cm and un-locking force is 20.5-36kgf.cm.	PASS	PASS	PASS	PASS	PASS
	Tumbler lid and cap: Open force is 2-10kgf.cm and close force is 1.5-10kgf.cm.	PASS	PASS	PASS	PASS	PASS
Remark	The item (number12) is tested according to the Finished product inspection specification, 5 products are selected for testing, and the test results are as above.					
NO.	Test Item \Serial NO.	0017				
13	Power cord tension as per IEC60335-1 requirement $\geq$ 6kgf	PASS				
(6) INFORMATION CHECK LIST						
NO.	Item	DETAILS/POSITION				Result
1	VOLTAGE SYSTEM	220-240V, 50-60Hz, 1000W				P
2	BAR CODE	ON CARTON and GIFT BOX 8809686404322				P



INSPECTION REPORT

7/7

REPORT NO. : LZX20250911-1

3	ACCESSORIES	User manual*1、Grinder Jar with Blade Base (300mL) *1、Tumbler Jar (600mL) *1、Chopper Jar with Blade Base (450mL) *1、Blending Jar with Blade Base (1500mL) *1	P
4	Printing	The PE bags and user manual printing match the reference drawings	P
(7) OTHER			
Item	Inspection Standard	DETAILS	结果 Result
Drop Test	ISTA-1A	Carton Box GROSS WEIGHT: 4.53kg DROP TEST SEQUENCE: 760mm SAFETY : PASS FUNCTION : PASS APPEARANCE : PASS	P
Carton size	387×243×379mm	380×245×383mm	P
Gift Box Size	372×230×359mm	370×233×360mm	P
HOTOEM Information Technology Company Limited		Liang Zixuan	Li Yanlin
REPORTED BY		INSPECTOR' S SIGNATURE	FACTORY' S REPRESENTATIVE SIGNATURE