

Product Name	Blender	Factory	MYLUX	Date	2025/9/12
P. O. No.	LS_H250707	Product Rating	220-240V 50-60Hz 1000W	Factory Model No.	Y-928
Customer Model No.	BL-E01EMS	Destination	GERMANY	Brand	HUROM
Order Qty	754PCS	Standby Qty	0	INSP. QTY.	754PCS
Sampling INSP. QTY.	80PCS	Serial No. : EF2509120001-EF2509120754			

INSPECTION STANDARD: Finished product inspection specification NO:QA-25-109-008 version: 01

ISO2859 General Inspection, Level II, Normal, Single Sampling Plan

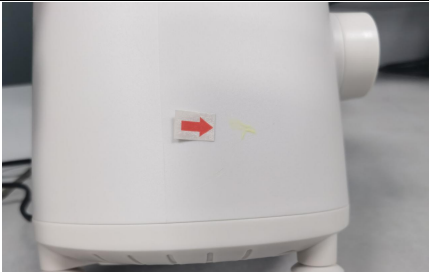
Acceptance Quality Level		Accept No.	Reject No.	Found No.	AQL JUDGEMENT
CRITICAL:	0	0	0	0	ACCEPT
MAJOR:	1.0	2	3	0	
MINOR:	4.0	7	8	4	

NO.	DESCRIPTION OF DEFECT	CR	MA	MI
1	Glue mark on surface	0	0	1
2	Dirt mark on surface	0	0	2
3	Dirt mark on button	0	0	1
4				
5				
6				
7				
Total :		0	0	4


Remark:

- 1、All the unacceptable products above, MYLUX will rework.
2、The defective photos are as shown below.

(1) Defect Photo

	
1. Glue mark on surface - Minor	2. Dirt mark on surface - Minor
	
3. Dirt mark on surface - Minor	4. Dirt mark on button - Minor

(2) CRITICAL PARTS CHECK LIST

Object/ part NO.	Manufacturer	Type	Technical data	Certification	RESULT	PHOTO
Power cord	Toong Yean Plastic Ind. Co.,Ltd.	H03VVH2-F (60227 IEC 52)	2 x 0,5mm ² (Cord length< 2m) 2 x 0,75mm ²	EN 50525-2-11 DIN VDE 0281- 5	P	
Plug	Toong Yean Plastic Ind. Co.,Ltd.	TY-019	250V~, 16A	DIN VDE 0620- 1 IEC 60884-1	P	
Motor	XIAMEN MYLUX INTELLIGENT TECHNOLOGY CO., LTD.	M7643CA2224P1 60F	AC220-240V 50 60Hz 1000W Class F	EN 60335-1 EN 60335-2-14	P	
Motor Protector	You Xian Lian Cheng Electron Co. Ltd.	17AM1039A5+PT C	AC 250 V, 160 °C	EN 60730-1 EN 60730-2-22	P	
X-capacitor	Tenta Electric Industrial Co., Ltd.	MEX	0.33μF, 275VAC, X2, 40/100/21	EN 60384-14	P	
Y-capacitor	JYH HSU(JEC) ELECTRONICS LTD	JY	Y2, 4700pF, 40/125/21	EN 60384-14	P	
Micro switch	GUANGDONG YUSHUN ELECTRIC APPLIANCE LTD	KW-5	10(5)A, 125/250V~, 1E4, T125, GWT 850	EN 61058-1	P	
Power Switch	ZHEJIANG JIALONG ELECTRON CO., LTD	RV-15	250VAC, 6(4)A, T125, 1E4	EN 61058-1	P	
PCB	XIAMEN TOPSUN ELECTRONIC TECHNOLOGY CO LTD	TS-002, TS- 003	Min. thickness: 1.0mm, V-0	EN 60335-1 EN 60335-2-14	P	

(3) Check the CDF record photos

Power cord	Toong Yean Plastic Ind. Co., Ltd.	TY-019	250V~, 16A		
------------	-----------------------------------	--------	------------	--	--

Alternative	Toong Yean Plastic Ind. Co., Ltd.	TY-019	250V~, 16A	DIN VDE 0620-1 IEC 60884-1	VDE 40002153
	Toong Yean Plastic Ind. Co., Ltd.	H03VVH2-F (60227 IEC 52)	2 x 0,5mm ² (Cord length< 2m) 2 x 0,75mm ²	EN 50525-2-11 DIN VDE 0281-5	VDE 40024356
	Toong Yean Plastic Ind. Co., Ltd.	H05VVH2-F (60227 IEC 53)	2 x 0,75mm ²	EN 50525-2-11 DIN VDE 0281-5	VDE 40024356
Motor	XIAMEN MYLUX INTELLIGENT TECHNOLOGY CO., LTD.	M7643CA222 4P160F	AC220-240V 50-60Hz 1000W Class F	EN 60335-1 EN 60335-2-14	Tested with appliance
- Motor protector	You Xian Lian Cheng Electron Co. Ltd.	17AM1 039A5+PTC	AC 250 V, 160°C	EN 60730-1 EN 60730-2-22	VDE 40028660
Alternative	JYH HSU (JEC) ELECTRONICS LTD	JY	Y2, 4700pF, 40/125/21	EN 60384-14	VDE 40038643
Alternative	Tenta Electric Industrial Co.,Ltd.	MEX	0.33μF, 275VAC, X2, 40/100/21	EN 60384-14	VDE 119119
Alternative	ZHEJIANG JIALONG ELECTRON CO.,LTD	RV-15	250VAC, 6(4)A, T125, 1E4	EN 61058-1	TUV R50408240
Micro-switch	GUANGDONG YUSHUN ELECTRIC APPLIANCE LTD	KW-5	10(5)A, 125/250V~, 1E4, T125, GWT 850	EN 61058-1	CN52651-A1/M1
PCB	XIAMEN TOPSUN ELECTRONIC TECHNOLOGY CO LTD	TS-002, TS-003	Min. thickness: 1.0 mm, V-0	EN 60335-1 EN 60335-2-14	Tested with the appliance UL E252242

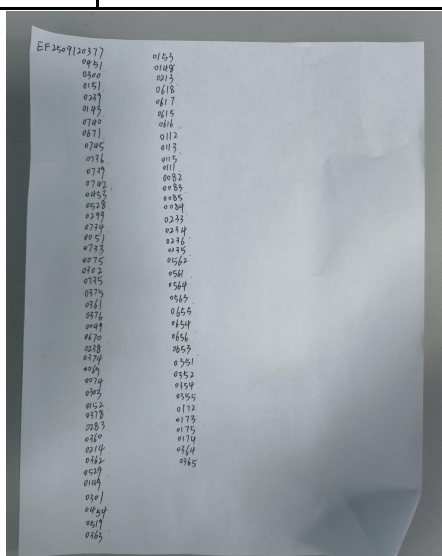
Remark:

The "CRITICAL PARTS CHECK LIST" and "Check the CDF record photos "are based on the CE report (report No. EFSH24120023-1E-01-L01)

(4) SERIAL NUMBER of INSPECTED UNITS

SERIAL NUMBER FORMAT AND RANGE:

The numbers below



(5) DATA TEST

NO.	Test Item \Serial NO.	0377	0300	0143	0671	0736	0742	0299	0051	Blank	Blank
-----	-----------------------	------	------	------	------	------	------	------	------	-------	-------

1	1500ML blending jar no-load power (with clutch) : Setting 1: (280-342W)	327	329	331	326	328	329	334	330	Blank	Blank
	1500ML blending jar no-load power (with clutch) : Setting 2: (408-525W)	472	470	473	471	467	472	469	474	Blank	Blank
	1500ML blending jar no-load power (with clutch) : Setting P: (408-525W)	473	468	473	468	466	471	466	470	Blank	Blank
2	Chopper jar power(with S blade): Setting 1: (240-420W)	326	328	333	329	330	327	325	322	Blank	Blank
	Chopper jar power(with S blade): Setting 2: (345-610W)	464	467	470	465	472	468	465	466	Blank	Blank
	Chopper jar power(with S blade): Setting P: (330-635W)	459	457	465	466	471	469	467	469	Blank	Blank
3	Blending water power (1500ML rated capacity water): 772-944W	787	791	786	788	793	791	788	792	Blank	Blank
4	Blending Water Test (1min)	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	Blank	Blank
5	Jar Leakage Test (1Hour)	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	Blank	Blank
Remark	The items (number1 to 5) are tested according to the S-2 standard,8 products are selected for testing, and the test results are as above.										
NO.	Test Item \Serial NO.	0302	0361	0670	0238	0074	0152	0283	0214	0149	0301
6	Hi-Pot Check (1500V/5mA/2s)	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS
7	Leakege Current Test ($\leq 0.25\text{mA}$)	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS
8	Cord Length ($85\pm 5\text{cm}$)	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS
Remark	1、The above items (number6 to 8) are tested according to the G II standard, and the data is only part of the test results, because the space limit does not show all the results.										
NO.	Test Item \Serial NO.	0519					0153				
9	No-load Speed Test (21240-25960rpm)	23075rpm					22724rpm				
NO.	Test Item \Serial NO.	0213					0615				

10	Noise Test $\leq 90\text{dB}$, 1m	76.4dB	77.8dB			
NO.	Test Item \Serial NO.	0112	0082			
11	Tumbler Capacity: 600mL $\pm$ 30mL	606mL	605mL			
	1500ML blending jar Capacity: 1500 $\pm$ 75mL	1436mL	1437mL			
Remark	The items (number9 to 11) are tested according to the Finished product inspection specification, 2 products are selected for testing, and the test results are as above.					
NO.	Test Item \Serial NO.	0233	0561	0655	0656	0354
12	Knob: Setting 1 force: 0.2-1.7kgf.cm; Setting 2 force: 0.2- 2.0kgf.cm Setting P force: 0.3- 2.5kgf.cm.	PASS	PASS	PASS	PASS	PASS
	Blending jar assembly and main base: Locking force is 10-35kgf.cm and un-locking force is 25- 55kgf.cm.	PASS	PASS	PASS	PASS	PASS
	Blending jar and jar base: Locking force is 30kgf.cm. And un-locking force is 18.5-30kgf.cm.	PASS	PASS	PASS	PASS	PASS
	Blending jar and jar lid: Open force is 1.3- 4kgf.cm, and close force is 0.8-4kgf.cm.	PASS	PASS	PASS	PASS	PASS
	Blending jar lid and cap: Locking force is 1.5-17.5kgf.cm and un- locking force is 2.5- 17.5kgf.cm.	PASS	PASS	PASS	PASS	PASS
	Grinder and grinder base: Locking force is 30kgf.cm, and un-locking force is 12.5- 31.5kgf.cm.	PASS	PASS	PASS	PASS	PASS
	Grinder assembly and main base: Locking force is 5-30kgf.cm and un- locking force is 5- 30kgf.cm.	PASS	PASS	PASS	PASS	PASS



INSPECTION REPORT

REPORT NO. : LZX20250912-1

	Chopper and chopper base: Locking force is $\leq$ 30kgf.cm and un-locking force is 15-35kgf.cm.	PASS	PASS	PASS	PASS	PASS
	Chopper assembly and main base: Locking force is 5-30kgf.cm and un-locking force is 5-30kgf.cm.	PASS	PASS	PASS	PASS	PASS
	Tumbler lid and jar: Locking force is 30kgf.cm and un-locking force is 20.5-36kgf.cm.	PASS	PASS	PASS	PASS	PASS
	Tumbler lid and cap: Open force is 2-10kgf.cm and close force is 1.5-10kgf.cm.	PASS	PASS	PASS	PASS	PASS

Remark	The item (number12) is tested according to the Finished product inspection specification, 5 products are selected for testing, and the test results are as above.					
--------	---	--	--	--	--	--

NO.	Test Item \Serial NO.	0173				
-----	-----------------------	------	--	--	--	--

13	Power cord tension as per IEC60335-1 requirement $\geq$ 6kgf	PASS				
----	--	------	--	--	--	--

(6) INFORMATION CHECK LIST

NO.	Item	DETAILS/POSITION	Result
1	VOLTAGE SYSTEM	220-240V, 50-60Hz, 1000W	P
2	BAR CODE	ON CARTON and GIFT BOX 8809686404315	P
3	ACCESSORIES	User manual*1、Grinder Jar with Blade Base (300mL) *1、Tumbler Jar (600mL) *1、Chopper Jar with Blade Base (450mL) *1、Blending Jar with Blade Base (1500mL) *1	P
4	Printing	The PE bags and user manual printing match the reference drawings	P

(7) OTHER

Item	Inspection Standard	DETAILS	结果 Result
Drop Test	ISTA-1A	Carton Box GROSS WEIGHT: 4.53kg DROP TEST SEQUENCE: 760mm SAFETY : PASS FUNCTION : PASS APPEARANCE : PASS	P
Carton size	387×243×379mm	380×250×385mm	P
Gift Box Size	372×230×359mm	370×230×358mm	P



INSPECTION REPORT

REPORT NO. : [LZX20250912-1](#)

HOTOEM Information Technology Company Limited	Liang Zixuan	Li Yanlin
REPORTED BY	INSPECTOR' S SIGNATURE	FACTORY' S REPRESENTATIVE SIGNATURE