

Product Name	Blender	Factory	MYLUX	Date	2025/8/20
P.O. No.	LS_H250626-2	Product Rating	220-240V 50-60Hz 1000W	Factory Model No.	Y-928
Customer Model No.	BL-E01FMG	Destination	Korea	Brand	HUROM
Order Qty	1500PCS	Standby Qty	0	INSP. QTY.	1500PCS
Sampling INSP. QTY.	125PCS	Serial No. : EF2508200001-EF2508201500			

INSPECTION STANDARD: [Finished product inspection specification NO:QA-25-109-008 version: 01](#)

[ISO2859 General Inspection, Level II, Normal, Single Sampling Plan](#)

Acceptance Quality Level		Accept No.	Reject No.	Found No.	AQL JUDGEMENT
CRITICAL:	0	0	0	0	ACCEPT
MAJOR:	1.0	3	4	0	
MINOR:	4.0	10	11	4	

NO.	DESCRIPTION OF DEFECT	CR	MA	MI
1	Dirt mark on surface	0	0	1
2	Scratch mark on surface	0	0	3
3				
4				
5				
6				
7				
Total :		0	0	4



Remark:

- 1、All the unacceptable products above, MYLUX will rework.
- 2、The defective photos are as shown below.

(1) Defect Photo

	
1. Dirt mark on surface - Minor	2. Scratch mark on surface - Minor
	
3. Scratch mark on surface - Minor	4. Scratch mark on surface - Minor

(2) CRITICAL PARTS CHECK LIST

Object/ part NO.	Manufacturer	Type	Technical data	Certification	RESULT	PHOTO
Power cord	Toong Yean Plastic Ind. Co.,Ltd.	60227 IEC52 (H03VVH2-F)	2 x 0.5mm ² (Length< 2m) 2 x 0.75mm ²	KC	P	
Plug	Toong Yean Plastic Industrial Co.,Ltd.	TY-019	250V~, 16A	KC	P	
Motor	Xiamen MYLUX Intelligent Technology Co., Ltd	M7643CA2224P1 60F	220-240V ~, 50- 60Hz, 1000W, Class:155 (F)	KC	P	
Motor Protector	You Xian Lian Cheng Electron Co. Ltd.	17AM1039A5+PT C	250V~, 16A, Tf:160°C	KC	P	
X-capacitor	Tenta Electric Industrial Co., Ltd.	HQX X2	275/310V ~, 0.33uF, ,4 0/110/56/B	KC	P	
Y-capacitor	JYH HSU(JEC) ELECTRONICS LTD	JY	300V~, 4700pF, Y2	KC	P	
Micro switch	GUANGDONG YUSHUN ELECTRIC APPLIANCE LTD	KW-5	(125/250)V~, 10(5)A	KC	P	
Power Switch	ZHEJIANG JIALONG ELECTRON CO., LTD	RV-15	250V~, 6 (4) A	KC	P	
PCB	XIAMEN TOPSUN ELECTRONIC TECHNOLOGY CO LTD	TS-002	Thickness: 1.0mm, V-0	KC	P	

(3) Check the CDF record photos

Plug	Toong Yean Plastic Industrial Co., Ltd	TY-019	250 V~, 16 A	KC
Power Cord	Toong Yean Plastic Ind. Co., Ltd.	60227 IEC52 (H03VVH2-F)	2X0.5 mm ² (Length < 2 m), 2X0.75 mm ²	KC
Motor	XIAMEN MYLUX INTELLIGENT TECHNOLOGY CO., LTD.	M7643CA2224P16 0F	(220 – 240) V~, (50 – 60) Hz, 1 000 W, Class : 155(F)	–
Motor Protector	You Xian Lian Cheng Electron Co. Ltd.	17AM1039A5+PT C	250 V~, 16 A, Tf: 160 °C	CBTR Evaluati on
Alt.	JYH HSU (JEC) ELECTRONICS LTD	JY	300 V~, 4 700 pF, Y2	CBTR Evaluati on
Alt.	Tenta Electric Industrial Co., Ltd.	MEX	275 V~, 0.33 uF, X2	CBTR Evaluati on
Alt.	ZHEJIANG JIALONG ELECTRON CO., LTD	RV-15	250 V~, 6(4) A	CBTR Evaluati on
Micro-Switch	GUANGDONG YUSHUN ELECTRIC APPLIANCE LTD	KW-5	(125 / 250) V~, 10(5) A	CBTR Evaluati on
PCB	XIAMEN TOPSUN ELECTRONIC TECHNOLOGY CO LTD	TS-002, TS-003	Thickness : 1.0 mm, V-0	–

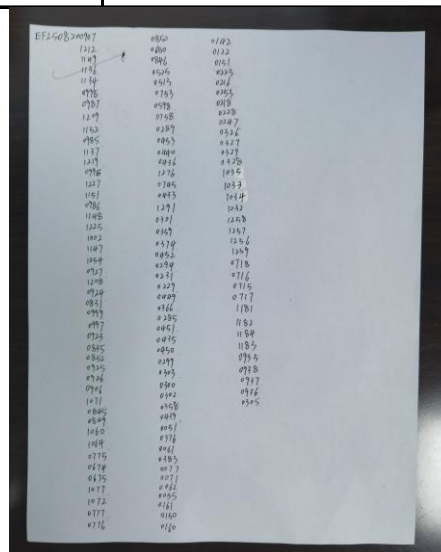
Remark:

The "CRITICAL PARTS CHECK LIST" and "Check the CDF record photos "are based on the KC report (report No. JU071262-25001)

(4) SERIAL NUMBER of INSPECTED UNITS

SERIAL NUMBER FORMAT AND RANGE:

The numbers below



(5) DATA TEST

NO.	Test Item \Serial NO.	1212	1134	0998	1152	1219	1151	1148	1002	Blank	Blank
-----	-----------------------	------	------	------	------	------	------	------	------	-------	-------

1	1500ML blending jar no-load power (with clutch) : Setting 1: (280-342W)	335	330	328	334	331	329	333	332	Blank	Blank
	1500ML blending jar no-load power (with clutch) : Setting 2: (408-525W)	477	479	475	480	482	474	478	480	Blank	Blank
	1500ML blending jar no-load power (with clutch) : Setting P: (408-525W)	483	484	482	482	487	477	483	482	Blank	Blank
2	Chopper jar power(with S blade): Setting 1: (240-420W)	330	332	328	329	331	334	331	330	Blank	Blank
	Chopper jar power(with S blade): Setting 2: (345-610W)	509	511	507	505	512	509	511	506	Blank	Blank
	Chopper jar power(with S blade): Setting P: (330-635W)	495	503	505	507	508	503	501	502	Blank	Blank
3	Blending water power (1500ML rated capacity water): 772-944W	809	813	808	815	812	806	810	809	Blank	Blank
4	Blending Water Test (1min)	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	Blank	Blank
5	Jar Leakage Test (1Hour)	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	Blank	Blank
Remark	The items (number1 to 5) are tested according to the S-2 standard,8 products are selected for testing, and the test results are as above.										
NO.	Test Item \Serial NO.	1054	0924	0835	0775	0674	1077	0525	0598	0289	0449
6	Hi-Pot Check (1500V/5mA/2s)	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS
7	Leakege Current Test ($\leq 0.25\text{mA}$)	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS
8	Cord Length ($85\pm 5\text{cm}$)	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS
Remark	1、The above items (number6 to 8) are tested according to the G II standard, and the data is only part of the test results, because the space limit does not show all the results.										
NO.	Test Item \Serial NO.	1276					0433				
9	No-load Speed Test (21240-25960rpm)	23200rpm					22694rpm				
NO.	Test Item \Serial NO.	0359					0452				

10	Noise Test ≤90dB, 1m	78.0dB		78.3dB		
NO.	Test Item \Serial NO.	0231		0366		
11	Tumbler Capacity: 600mL ±30mL	604mL		605mL		
	1500ML blending jar Capacity: 1500±75mL	1439mL		1440mL		
Remark	The items (number9 to 11) are tested according to the Finished product inspection specification,2 products are selected for testing, and the test results are as above.					
NO.	Test Item \Serial NO.	0451	0299	0358	0051	0383
12	Knob: Setting 1 force: 0.2-1.7kgf.cm; Setting 2 force: 0.2-2.0kgf.cm Setting P force: 0.3-2.5kgf.cm.	PASS	PASS	PASS	PASS	PASS
	Blending jar assembly and main base: Locking force is 10-35kgf.cm and un-lockingforce is 25-55kgf.cm.	PASS	PASS	PASS	PASS	PASS
	Blending jar and jar base: Locking force is 30kgf.cm. And un-locking force is 18.5-30kgf.cm.	PASS	PASS	PASS	PASS	PASS
	Blending jar and jar lid: Open force is 1.3-4kgf.cm, and close force is 0.8-4kgf.cm.	PASS	PASS	PASS	PASS	PASS
	Blending jar lid and cap: Locking force is 1.5-17.5kgf.cm and un-locking force is 2.5-17.5kgf.cm.	PASS	PASS	PASS	PASS	PASS
	Grinder and grinder base: Locking force is 30kgf.cm, and un-locking force is 12.5-31.5kgf.cm.	PASS	PASS	PASS	PASS	PASS
	Grinder assembly and main base: Locking force is 5-30kgf.cm and un-locking force is 5-30kgf.cm.	PASS	PASS	PASS	PASS	PASS



INSPECTION REPORT

REPORT NO. : LZX20250820-1

	Chopper and chopper base: Locking force is $\leq$ 30kgf.cm and un-locking force is 15-35kgf.cm.	PASS	PASS	PASS	PASS	PASS
	Chopper assembly and main base: Locking force is 5-30kgf.cm and un-locking force is 5-30kgf.cm.	PASS	PASS	PASS	PASS	PASS
	Tumbler lid and jar: Locking force is 30kgf.cm and un-locking force is 20.5-36kgf.cm.	PASS	PASS	PASS	PASS	PASS
	Tumbler lid and cap: Open force is 2-10kgf.cm and close force is 1.5-10kgf.cm.	PASS	PASS	PASS	PASS	PASS

Remark	The item (number12) is tested according to the Finished product inspection specification, 5 products are selected for testing, and the test results are as above.					
--------	---	--	--	--	--	--

NO.	Test Item \Serial NO.	0161				
-----	-----------------------	------	--	--	--	--

13	Power cord tension as per IEC60335-1 requirement $\geq$ 6kgf	PASS				
----	--	------	--	--	--	--

(6) INFORMATION CHECK LIST

NO.	Item	DETAILS/POSITION	Result
1	VOLTAGE SYSTEM	220-240V, 50-60Hz, 1000W	P
2	BAR CODE	ON CARTON and GIFT BOX 8809686404087	P
3	ACCESSORIES	User manual*1、Grinder Jar with Blade Base (300mL) *1、Tumbler Jar (600mL) *1、Chopper Jar with Blade Base (450mL) *1、Blending Jar with Blade Base (1500mL) *1	P
4	Printing	The PE bags and user manual printing match the reference drawings	P

(7) OTHER

Item	Inspection Standard	DETAILS	结果 Result
Drop Test	ISTA-1A	Carton Box GROSS WEIGHT: 4.43kg DROP TEST SEQUENCE: 760mm SAFETY : PASS FUNCTION : PASS APPEARANCE : PASS	P
Carton size	387×243×379mm	380×250×385mm	P
Gift Box Size	372×230×359mm	370×230×358mm	P



INSPECTION REPORT

7/7

REPORT NO. : [LZX20250820-1](#)

HOTOEM Information Technology Company Limited	Liang Zixuan	Li Yanlin
REPORTED BY	INSPECTOR' S SIGNATURE	FACTORY' S REPRESENTATIVE SIGNATURE