

Product Name	Blender	Factory	MYLUX	Date	2025/8/21
P.O. No.	LS_H250626-2	Product Rating	220-240V 50-60Hz 1000W	Factory Model No.	Y-928
Customer Model No.	BL-E01FMS	Destination	Korea	Brand	HUROM
Order Qty	1500PCS	Standby Qty	0	INSP. QTY.	1500PCS
Sampling INSP. QTY.	125PCS	Serial No. : EF2508210001-EF2508211500			

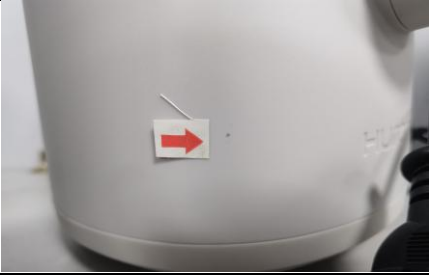
INSPECTION STANDARD: Finished product inspection specification NO:QA-25-109-008 version: 01

ISO2859 General Inspection, Level II, Normal, Single Sampling Plan

Acceptance Quality Level		Accept No.	Reject No.	Found No.	AQL JUDGEMENT		
CRITICAL:	0	0	0	0	ACCEPT		
MAJOR:	1.0	3	4	0			
MINOR:	4.0	10	11	7			
NO.	DESCRIPTION OF DEFECT				CR	MA	MI
1	Dirt mark on button				0	0	1
2	Dirt mark on surface				0	0	3
3	Dirt mark on inside				0	0	3
4							
5							
6							
7							
	Total :				0	0	7



Remark:
1、All the unacceptable products above, MYLUX will rework.
2、The defective photos are as shown below.

(1) Defect Photo

	
1. Dirt mark on button - Minor	2. Dirt mark on surface - Minor
	
3. Dirt mark on surface - Minor	4. Dirt mark on surface - Minor

			
5. Dirt mark on inside - Minor		6. Dirt mark on inside - Minor	
			
7. Dirt mark on inside - Minor			

(2) CRITICAL PARTS CHECK LIST

Object/ part NO.	Manufacturer	Type	Technical data	Certification	RESULT	PHOTO
Power cord	Toong Yean Plastic Ind. Co.,Ltd.	60227 IEC52 (H03VVH2-F)	2 x 0.5mm ² (Length< 2m) 2 x 0.75mm ²	KC	P	
Plug	Toong Yean Plastic Industrial Co.,Ltd.	TY-019	250V~, 16A	KC	P	
Motor	Xiamen MYLUX Intelligent Technology Co., Ltd	M7643CA2224P1 60F	220-240V ~, 50- 60Hz, 1000W, Class:155(F)	KC	P	
Motor Protector	You Xian Lian Cheng Electron Co. Ltd.	17AM1039A5+PT C	250V~, 16A, Tf:160°C	KC	P	
X-capacitor	Tenta Electric Industrial Co., Ltd.	HQX X2	275/310V ~, 0.33uF, ,4 0/110/56/B	KC	P	
Y-capacitor	JYH HSU(JEC) ELECTRONICS LTD	JY	300V~, 4700pF, Y2	KC	P	
Micro switch	GUANGDONG YUSHUN ELECTRIC APPLIANCE LTD	KW-5	(125/250)V~, 10(5)A	KC	P	

Power Switch	ZHEJIANG JIALONG ELECTRON CO., LTD	RV-15	250V~, 6 (4) A	KC	P	
PCB	XIAMEN TOPSUN ELECTRONIC TECHNOLOGY CO LTD	TS-002	Thickness: 1.0mm, V-0	KC	P	

(3) Check the CDF record photos

Plug	Toong Yean Plastic Industrial Co., Ltd	TY-019	250 V~, 16 A	KC
Power Cord	Toong Yean Plastic Ind. Co., Ltd.	60227 IEC52 (H03VVH2-F)	2X0.5 mm ² (Length < 2 m), 2X0.75 mm ²	KC
Motor	XIAMEN MYLUX INTELLIGENT TECHNOLOGY CO., LTD.	M7643CA2224P16 0F	(220 - 240) V~, (50 - 60) Hz, 1 000 W, Class : 155(F)	-
Motor Protector	You Xian Lian Cheng Electron Co. Ltd.	17AM1039A5+PT C	250 V~, 16 A, Tf: 160 °C	CBTR Evaluati on
Alt.	JYH HSU (JEC) ELECTRONICS LTD	JY	300 V~, 4 700 pF, Y2	CBTR Evaluati on
Alt.	Tenta Electric Industrial Co., Ltd.	MEX	275 V~, 0.33 uF, X2	CBTR Evaluati on
Alt.	ZHEJIANG JIALONG ELECTRON CO., LTD	RV-15	250 V~, 6(4) A	CBTR Evaluati on
Micro-Switch	GUANGDONG YUSHUN ELECTRIC APPLIANCE LTD	KW-5	(125 / 250) V~, 10(5) A	CBTR Evaluati on
PCB	XIAMEN TOPSUN ELECTRONIC TECHNOLOGY CO LTD	TS-002, TS-003	Thickness : 1.0 mm, V-0	-

Remark:

The "CRITICAL PARTS CHECK LIST" and "Check the CDF record photos "are based on the KC report (report No. JU071262-25001)

(4) SERIAL NUMBER of INSPECTED UNITS

SERIAL NUMBER FORMAT AND RANGE:	The numbers below
---------------------------------	-------------------

BL-E0IFMs										
0876	0342	1125	0587	0218	0899	1001	0849	1041	0117	
1321	0789	0298	0901	1203	1081	0485	1121	1461	0601	
0502	1456	0678	0118	0335	0789	1201	0532	0100	1415	
0567	0890	0123	1181	1300	1281	0250	0045	1341	1361	
0061	1011	1213	0119	1261	0120	0602	1340	0090	0333	
1119	1025	0647	1425	1427	0667	0330	0202	0012	1221	
1223	0031	0233	0435	0637	0332	0529	0334	0456	1038	
0839	0869	1243	0687	1421	1234	0081	0283	1041	0526	
1445	0051	0071	1455	1357	0331	0829	1161	0201		
0859	0246	0263	1241	0889	0248	0533	0603	0588		
0485	1017	1381	0475	0677	0534	1061	0336	1141		
0879	0253	0247	1441	1021	1401	0600	0200	0400		
0273	1091	0293	0495	0697	0249	1101	1301	1009		

(5) DATA TEST

[illegible]

NO.	Test Item \Serial NO.	1025	0869	0246	1091	0298	1213	0233	0071	1381	0293
6	Hi-Pot Check (1500V/5mA/2s)	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS
7	Leakege Current Test (≤ 0.25mA)	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS
8	Cord Length (85±5cm)	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS
Remark	1、The above items (number6 to 8) are tested according to the G II standard, and the data is only part of the test results, because the space limit does not show all the results.										
NO.	Test Item \Serial NO.	0901					1181				
9	No-load Speed Test (21240-25960rpm)	23092rpm					23676rpm				
NO.	Test Item \Serial NO.	1425					1455				
10	Noise Test ≤90dB, 1m	76.0dB					76.6dB				
NO.	Test Item \Serial NO.	0475					0218				
11	Tumbler Capacity: 600mL ±30mL	603mL					605mL				
	1500ML blending jar Capacity: 1500±75mL	1444mL					1442mL				
Remark	The items (number9 to 11) are tested according to the Finished product inspection specification,2 products are selected for testing, and the test results are as above.										
NO.	Test Item \Serial NO.	1300	1427		0889			0697		1081	
	Knob: Setting 1 force: 0.2-1.7kgf.cm; Setting 2 force: 0.2- 2.0kgf.cm Setting P force: 0.3- 2.5kgf.cm.	PASS	PASS		PASS			PASS		PASS	
	Blending jar assembly and main base: Locking force is 10-35kgf.cm and un-lockingforce is 25- 55kgf.cm.	PASS	PASS		PASS			PASS		PASS	
	Blending jar and jar base: Locking force is 30kgf.cm. And un-locking force is 18.5-30kgf.cm.	PASS	PASS		PASS			PASS		PASS	
	Blending jar and jar lid: Open force is 1.3- 4kgf.cm, and close force is 0.8-4kgf.cm.	PASS	PASS		PASS			PASS		PASS	

12	Blending jar lid and cap: Locking force is 1.5-17.5kgf.cm and un-locking force is 2.5-17.5kgf.cm.	PASS	PASS	PASS	PASS	PASS
	Grinder and grinder base: Locking force is 30kgf.cm, and un-locking force is 12.5-31.5kgf.cm.	PASS	PASS	PASS	PASS	PASS
	Grinder assembly and main base: Locking force is 5-30kgf.cm and un-locking force is 5-30kgf.cm.	PASS	PASS	PASS	PASS	PASS
	Chopper and chopper base: Locking force is ≤ 30kgf.cm and un-locking force is 15-35kgf.cm.	PASS	PASS	PASS	PASS	PASS
	Chopper assembly and main base: Locking force is 5-30kgf.cm and un-locking force is 5-30kgf.cm.	PASS	PASS	PASS	PASS	PASS
	Tumbler lid and jar: Locking force is 30kgf.cm and un-locking force is 20.5-36kgf.cm.	PASS	PASS	PASS	PASS	PASS
	Tumbler lid and cap: Open force is 2-10kgf.cm and close force is 1.5-10kgf.cm.	PASS	PASS	PASS	PASS	PASS
Remark	The item (number12) is tested according to the Finished product inspection specification, 5 products are selected for testing, and the test results are as above.					
NO.	Test Item \Serial NO.	0332				
13	Power cord tension as per IEC60335-1 requirement ≥6kgf	PASS				
(6) INFORMATION CHECK LIST						
NO.	Item	DETAILS/POSITION				Result
1	VOLTAGE SYSTEM	220-240V, 50-60Hz, 1000W				P
2	BAR CODE	ON CARTON and GIFT BOX 8809686404070				P



INSPECTION REPORT

7/7

REPORT NO. : LZX20250821-1

3	ACCESSORIES	User manual*1、Grinder Jar with Blade Base (300mL) *1、Tumbler Jar (600mL) *1、Chopper Jar with Blade Base (450mL) *1、Blending Jar with Blade Base (1500mL) *1	P
4	Printing	The PE bags and user manual printing match the reference drawings	P
(7) OTHER			
Item	Inspection Standard	DETAILS	结果 Result
Drop Test	ISTA-1A	Carton Box GROSS WEIGHT: 4.43kg DROP TEST SEQUENCE: 760mm SAFETY : PASS FUNCTION : PASS APPEARANCE : PASS	P
Carton size	387×243×379mm	380×250×385mm	P
Gift Box Size	372×230×359mm	370×230×358mm	P
HOTOEM Information Technology Company Limited		Liang Zixuan	Li Yanlin
REPORTED BY		INSPECTOR' S SIGNATURE	FACTORY' S REPRESENTATIVE SIGNATURE