

Product Name	Blender	Factory	MYLUX	Date	2026/8/11
P.O. No.	LS_H260521	Product Rating	220-240V 50-60Hz 1000W	Factory Model No.	Y-928
Customer Model No.	BL-E01GMG	Destination	Malaysia	Brand	HUROM
Order Qty	754PCS	Standby Qty	0	INSP. QTY.	754PCS
Sampling INSP. QTY.	80PCS	Serial No. : EF2608060001-EF2608060754			

INSPECTION STANDARD: Finished product inspection specification NO:QA-25-109-008 version: 01

ISO2859 General Inspection, Level II, Normal, Single Sampling Plan

Acceptance Quality Level		Accept No.	Reject No.	Found No.	AQL JUDGEMENT		
CRITICAL:	0	0	0	0	REJECT		
MAJOR:	1.0	2	3	0			
MINOR:	4.0	7	8	3			
NO.	DESCRIPTION OF DEFECT				CR	MA	MI
1	Scratch mark on base				0	0	1
2	Scratch mark on surface				0	0	2
3							
4							
5							
	Total :				0	0	3




Remark:

- 1、All the unacceptable products above, MYLUX will rework.
- 2、The defective photos are as shown below.
- 3、For all samples, the cord length was found to be 95 cm, which does not conform to the spec (85 ± 5 cm).
- 4、The factory could not provide the ST COA, and no ST-SIRIM mark was found on the products.

(1) Defect Photo

	
1. Scratch mark on base - Minor	2. Scratch mark on surface - Minor
	
3. Scratch mark on surface - Minor	Remark 3. The cord length not conform to the spec

(2) CRITICAL PARTS CHECK LIST

Object/ part NO.	Manufacturer	Type	Technical data	Certification	RESULT	PHOTO
BS Power plug with power cord	Dongguan toongyeen plastic ind.co., ltd.	H03VVH2-F (60227 IEC 52)	2 x 0,5mm2 (Cord length< 2m) 2 x 0,75mm2	EN 50525-2-11 DIN VDE 0281- 5	P	
BS Power plug with power cord	Toong Yean Plastic Ind. Co., Ltd.	TY-999	250V~, 5A	BS 1363-1	P	
Motor	XIAMEN MYLUX INTELLIGENT TECHNOLOGY CO., LTD.	M7643CA2224P1 60F	AC220-240V 50 60Hz 1000W Class F	EN 60335-1 EN 60335-2-14	P	
Motor Protector	You Xian Lian Cheng Electron Co. Ltd.	17AM1039A5+PT C	AC 250 V, 160 °C	EN 60730-1 EN 60730-2-22	P	
X-capacitor	Tenta Electric Industrial Co., Ltd.	MEX	0.33μF, 275VAC, X2, 40/100/21	EN 60384-14	P	
Y-capacitor	JYH HSU(JEC) ELECTRONICS LTD	JY	Y2, 4700pF, 40/125/21	EN 60384-14	P	
Micro switch	GUANGDONG YUSHUN ELECTRIC APPLIANCE LTD	KW-5	10(5)A, 125/250V~, 1E4, T125, GWT 850	EN 61058-1	P	
Power Switch	ZHEJIANG JIALONG ELECTRON CO., LTD	RV-15	250VAC, 6(4)A, T125, 1E4	EN 61058-1	P	
PCB	XIAMEN TOPSUN ELECTRONIC TECHNOLOGY CO LTD	TS-002, TS- 003	Min. thickness: 1.0mm, V-0	EN 60335-1 EN 60335-2-14	P	

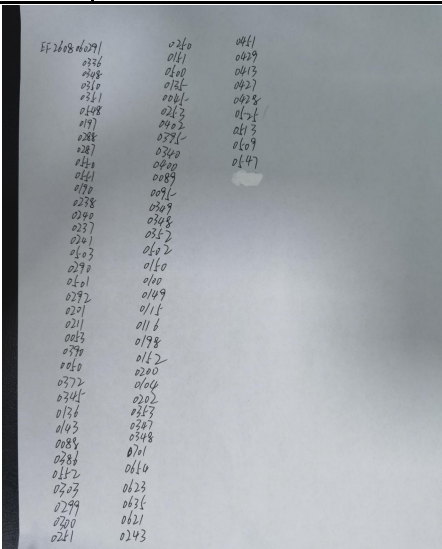
(3) Check the CDF record photos

BS Power plug with power cord	Dongguan toongyeen plastic ind.co., ltd.	TY-998 TY-999	250V~,5A/6A/7A/ 10A/13A	BS 1363-1	BSI KM 535718
	Toong Yean Plastic Ind. Co., Ltd.	H03VVH2-F (60227 IEC 52)	2 x 0,5mm ² (Cord length< 2m) 2 x 0,75mm ²	EN 50525-2-11 DIN VDE 0281-5	VDE 40024356
Motor	XIAMEN MYLUX INTELLIGENT TECHNOLOGY CO., LTD.	M7643CA222 4P160F	AC220-240V 50- 60Hz 1000W Class F	IEC 60335-1 IEC 60335-2-14	Tested with appliance
- Motor protector	You Xian Lian Cheng Electron Co. Ltd.	17AM1 039A5+PTC	AC 250 V, 160°C	IEC 60730-1 IEC 60730-2-22	VDE 40028660
Alternative	JYH HSU (JEC) ELECTRONICS LTD	JY	Y2, 4700pF, 40/125/21	IEC 60384-14	VDE 40038643
Alternative	Tenta Electric Industrial Co.,Ltd.	MEX	0.33μF, 275VAC, X2, 40/100/21	IEC 60384-14	VDE 119119
Alternative	ZHEJIANG JIALONG ELECTRON CO.,LTD	RV-15	250VAC, 6(4)A, T125, 1E4	IEC 61058-1	TUV R50408240
Micro-switch	GUANGDONG YUSHUN ELECTRIC APPLIANCE LTD	KW-5	10(5)A, 125/250V~, 1E4, T125, GWT 850	IEC 61058-1	CN52651- A1/M1
PCB	XIAMEN TOPSUN ELECTRONIC TECHNOLOGY CO LTD	TS-002, TS-003	Min. thickness: 1.0 mm, V-0	IEC 60335-1 IEC 60335-2-14	Tested with the appliance UL E252242

Remark:

The "CRITICAL PARTS CHECK LIST" and "Check the CDF record photos "are based on the CB report (report No. EFGX26050538-IE-01-L01)

(4) SERIAL NUMBER of INSPECTED UNITS

SERIAL NUMBER FORMAT AND RANGE:	The numbers below
	

(5) DATA TEST

NO.	Test Item \Serial NO.	0336	0351	0548	0287	0551	0238	0503	0292	Blank	Blank
1	1500ML blending jar no-load power (with clutch) : Setting 1: (280-342W)	316	320	319	313	316	319	321	315	Blank	Blank
	1500ML blending jar no-load power (with clutch) : Setting 2: (408-525W)	464	469	462	458	466	463	465	461	Blank	Blank
	1500ML blending jar no-load power (with clutch) : Setting P: (408-525W)	463	465	463	462	461	459	466	457	Blank	Blank
2	Chopper jar power(with S blade): Setting 1: (240-420W)	319	323	324	316	314	315	319	321	Blank	Blank
	Chopper jar power(with S blade): Setting 2: (345-610W)	472	476	468	474	479	473	466	471	Blank	Blank
	Chopper jar power(with S blade): Setting P: (330-635W)	474	478	469	472	475	477	480	473	Blank	Blank
3	Blending water power (1500ML rated capacity water): 772-944W	828	821	825	830	827	833	834	829	Blank	Blank
4	Blending Water Test (1min)	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	Blank	Blank
5	Jar Leakage Test (1Hour)	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	Blank	Blank
Remark	The items (number1 to 5) are tested according to the S-2 standard,8 products are selected for testing, and the test results are as above.										
NO.	Test Item \Serial NO.	0211	0053	0372	0136	0088	0552	0303	0251	0151	0135
6	Hi-Pot Check (1500V/5mA/2s)	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS
7	Leakege Current Test ($\leq 0.25\text{mA}$)	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS	PASS
8	Cord Length ($85\pm 5\text{cm}$)	FAIL	FAIL	FAIL	FAIL	FAIL	FAIL	FAIL	FAIL	FAIL	FAIL
Remark	1、The above items (number6 to 8) are tested according to the G II standard, and the data is only part of the test results, because the space limit does not show all the results.										
NO.	Test Item \Serial NO.	0395					0089				
9	No-load Speed Test (21240-25960rpm)	23092rpm					23297rpm				

NO.	Test Item \Serial NO.	0348			0502	
10	Noise Test ≤90dB, 1m	81.1dB			81.6dB	
NO.	Test Item \Serial NO.	0100			0116	
11	Tumbler Capacity: 600mL±30mL	605mL			605mL	
	1500ML blending jar Capacity: 1500±75mL	1442mL			1443mL	
Remark	The items (number9 to 11) are tested according to the Finished product inspection specification,2 products are selected for testing, and the test results are as above.					
NO.	Test Item \Serial NO.	0152	0353	0701	0623	0243
12	Knob: Setting 1 force: 0.2-1.7kgf.cm; Setting 2 force: 0.2- 2.0kgf.cm Setting P force: 0.3- 2.5kgf.cm.	PASS	PASS	PASS	PASS	PASS
	Blending jar assembly and main base: Locking force is 10-35kgf.cm and un-lockingforce is 25- 55kgf.cm.	PASS	PASS	PASS	PASS	PASS
	Blending jar and jar base: Locking force is 30kgf.cm. And un-locking force is 18.5-30kgf.cm.	PASS	PASS	PASS	PASS	PASS
	Blending jar and jar lid: Open force is 1.3- 4kgf.cm, and close force is 0.8-4kgf.cm.	PASS	PASS	PASS	PASS	PASS
	Blending jar lid and cap: Locking force is 1.5-17.5kgf.cm and un- locking force is 2.5- 17.5kgf.cm.	PASS	PASS	PASS	PASS	PASS
	Grinder and grinder base: Locking force is 30kgf.cm, and un-locking force is 12.5- 31.5kgf.cm.	PASS	PASS	PASS	PASS	PASS
	Grinder assembly and main base: Locking force is 5-30kgf.cm and un- locking force is 5- 30kgf.cm.	PASS	PASS	PASS	PASS	PASS

	Chopper and chopper base: Locking force is $\leq$ 30kgf.cm and un-locking force is 15-35kgf.cm.	PASS	PASS	PASS	PASS	PASS
	Chopper assembly and main base: Locking force is 5-30kgf.cm and un-locking force is 5-30kgf.cm.	PASS	PASS	PASS	PASS	PASS
	Tumbler lid and jar: Locking force is 30kgf.cm and un-locking force is 20.5-36kgf.cm.	PASS	PASS	PASS	PASS	PASS
	Tumbler lid and cap: Open force is 2-10kgf.cm and close force is 1.5-10kgf.cm.	PASS	PASS	PASS	PASS	PASS
Remark	The item (number12) is tested according to the Finished product inspection specification, 5 products are selected for testing, and the test results are as above.					
NO.	Test Item \Serial NO.	0429				
13	Power cord tension as per IEC60335-1 requirement $\geq$ 6kgf	PASS				
(6) INFORMATION CHECK LIST						
NO.	Item	DETAILS/POSITION				Result
1	VOLTAGE SYSTEM	220-240V, 50-60Hz, 1000W				P
2	BAR CODE	ON GIFT BOX 8809686405503				P
3	ACCESSORIES	User manual*1、Grinder Jar with Blade Base (300mL) *1、Tumbler Jar (600mL) *1、Chopper Jar with Blade Base (450mL) *1、Blending Jar with Blade Base (1500mL) *1				P
4	Printing	The PE bags and user manual printing match the reference drawings				P
(7) OTHER						
Item	Inspection Standard	DETAILS				结果 Result
Drop Test	ISTA-1A	Carton Box GROSS WEIGHT: 4.49kg DROP TEST SEQUENCE: 760mm SAFETY : PASS FUNCTION : PASS APPEARANCE : PASS				P
Carton size	387×243×379mm	385×248×383mm				P



INSPECTION REPORT

REPORT NO. : [LZX20260811-1](#)

Gift Box Size	372×230×359mm	370×230×358mm	P
HOTOEM Information Technology Company Limited	Liang Zixuan	Li Yanlin	
REPORTED BY	INSPECTOR' S SIGNATURE	FACTORY' S REPRESENTATIVE SIGNATURE	