

|                     |            |                                        |                        |                   |           |
|---------------------|------------|----------------------------------------|------------------------|-------------------|-----------|
| Product Name        | Blender    | Factory                                | MYLUX                  | Date              | 2026/8/11 |
| P.O. No.            | LS_H260521 | Product Rating                         | 220-240V 50-60Hz 1000W | Factory Model No. | Y-928     |
| Customer Model No.  | BL-E01GMS  | Destination                            | Malaysia               | Brand             | HUROM     |
| Order Qty           | 754PCS     | Standby Qty                            | 0                      | INSP. QTY.        | 754PCS    |
| Sampling INSP. QTY. | 80PCS      | Serial No. : EF2608070001-EF2608070754 |                        |                   |           |

INSPECTION STANDARD: Finished product inspection specification NO:QA-25-109-008 version: 01

ISO2859 General Inspection, Level II, Normal, Single Sampling Plan

| Acceptance Quality Level |                                               | Accept No. | Reject No. | Found No. | AQL JUDGEMENT |    |    |
|--------------------------|-----------------------------------------------|------------|------------|-----------|---------------|----|----|
| CRITICAL:                | 0                                             | 0          | 0          | 0         | REJECT        |    |    |
| MAJOR:                   | 1.0                                           | 2          | 3          | 1         |               |    |    |
| MINOR:                   | 4.0                                           | 7          | 8          | 2         |               |    |    |
| NO.                      | DESCRIPTION OF DEFECT                         |            |            |           | CR            | MA | MI |
| 1                        | Foreign debris found underneath the nameplate |            |            |           | 0             | 1  | 0  |
| 2                        | Dirt mark on surface                          |            |            |           | 0             | 0  | 2  |
| 3                        |                                               |            |            |           |               |    |    |
| 4                        |                                               |            |            |           |               |    |    |
| 5                        |                                               |            |            |           |               |    |    |
|                          | Total :                                       |            |            |           | 0             | 1  | 2  |






## Remark:

- 1、All the unacceptable products above, MYLUX will rework.
- 2、The defective photos are as shown below.
- 3、For all samples, the cord length was found to be 95 cm, which does not conform to the spec (85±5 cm).
- 4、The factory could not provide the ST COA, and no ST-SIRIM mark was found on the products.

## (1) Defect Photo

|                                                                                     |                                                                                      |
|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------|
|  |  |
| 1. Foreign debris found underneath the nameplate - Major                            | 2. Dirt mark on surface - Minor                                                      |
|  |  |
| 3. Dirt mark on surface - Minor                                                     | Remark 3. The cord length not conform to the spec                                    |

## (2) CRITICAL PARTS CHECK LIST

| Object/<br>part NO.                    | Manufacturer                                           | Type                           | Technical<br>data                                                         | Certification                       | RESULT | PHOTO                                                                                 |
|----------------------------------------|--------------------------------------------------------|--------------------------------|---------------------------------------------------------------------------|-------------------------------------|--------|---------------------------------------------------------------------------------------|
| BS Power<br>plug<br>with power<br>cord | Dongguan<br>toongyeen plastic<br>ind.co., ltd.         | H03VVH2-F<br>(60227 IEC<br>52) | 2 x 0,5mm <sup>2</sup><br>(Cord length<<br>2m)<br>2 x 0,75mm <sup>2</sup> | EN 50525-2-11<br>DIN VDE 0281-<br>5 | P      |    |
| BS Power<br>plug<br>with power<br>cord | Toong Yean<br>Plastic Ind. Co.,<br>Ltd.                | TY-999                         | 250V~, 5A                                                                 | BS 1363-1                           | P      |    |
| Motor                                  | XIAMEN MYLUX<br>INTELLIGENT<br>TECHNOLOGY CO.,<br>LTD. | M7643CA2224P1<br>60F           | AC220-240V 50<br>60Hz 1000W<br>Class F                                    | EN 60335-1<br>EN 60335-2-14         | P      |    |
| Motor<br>Protector                     | You Xian Lian<br>Cheng Electron<br>Co. Ltd.            | 17AM1039A5+PT<br>C             | AC 250 V, 160<br>°C                                                       | EN 60730-1<br>EN 60730-2-22         | P      |   |
| X-capacitor                            | Tenta Electric<br>Industrial Co.,<br>Ltd.              | MEX                            | 0.33μF,<br>275VAC, X2,<br>40/100/21                                       | EN 60384-14                         | P      |  |
| Y-capacitor                            | JYH HSU(JEC)<br>ELECTRONICS LTD                        | JY                             | Y2, 4700pF,<br>40/125/21                                                  | EN 60384-14                         | P      |  |
| Micro switch                           | GUANGDONG YUSHUN<br>ELECTRIC<br>APPLIANCE LTD          | KW-5                           | 10(5)A,<br>125/250V~,<br>1E4,<br>T125, GWT 850                            | EN 61058-1                          | P      |  |
| Power Switch                           | ZHEJIANG JIALONG<br>ELECTRON CO., LTD                  | RV-15                          | 250VAC,<br>6(4)A, T125,<br>1E4                                            | EN 61058-1                          | P      |  |
| PCB                                    | XIAMEN TOPSUN<br>ELECTRONIC<br>TECHNOLOGY CO LTD       | TS-002, TS-<br>003             | Min.<br>thickness:<br>1.0mm, V-0                                          | EN 60335-1<br>EN 60335-2-14         | P      |  |

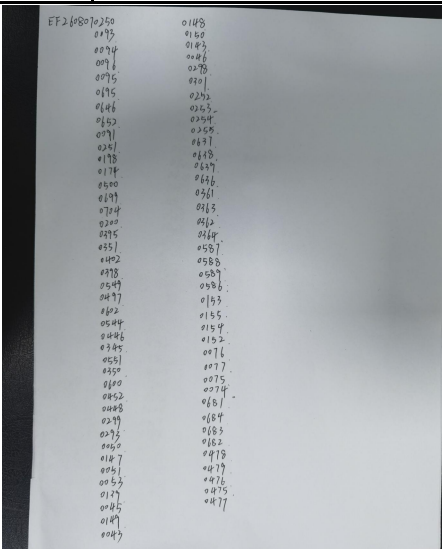
## (3) Check the CDF record photos

|                               |                                               |                             |                                                                     |                                 |                                            |
|-------------------------------|-----------------------------------------------|-----------------------------|---------------------------------------------------------------------|---------------------------------|--------------------------------------------|
| BS Power plug with power cord | Dongguan toongyeen plastic ind.co., ltd.      | TY-998<br>TY-999            | 250V~,5A/6A/7A/<br>10A/13A                                          | BS 1363-1                       | BSI KM<br>535718                           |
|                               | Toong Yean Plastic Ind. Co., Ltd.             | H03VVH2-F<br>(60227 IEC 52) | 2 x 0,5mm <sup>2</sup> (Cord length< 2m)<br>2 x 0,75mm <sup>2</sup> | EN 50525-2-11<br>DIN VDE 0281-5 | VDE<br>40024356                            |
| Motor                         | XIAMEN MYLUX INTELLIGENT TECHNOLOGY CO., LTD. | M7643CA222<br>4P160F        | AC220-240V 50-<br>60Hz 1000W<br>Class F                             | IEC 60335-1<br>IEC 60335-2-14   | Tested with<br>appliance                   |
| - Motor protector             | You Xian Lian Cheng Electron Co. Ltd.         | 17AM1<br>039A5+PTC          | AC 250 V, 160°C                                                     | IEC 60730-1<br>IEC 60730-2-22   | VDE<br>40028660                            |
| Alternative                   | JYH HSU (JEC) ELECTRONICS LTD                 | JY                          | Y2, 4700pF,<br>40/125/21                                            | IEC 60384-14                    | VDE<br>40038643                            |
| Alternative                   | Tenta Electric Industrial Co.,Ltd.            | MEX                         | 0.33μF, 275VAC,<br>X2, 40/100/21                                    | IEC 60384-14                    | VDE 119119                                 |
| Alternative                   | ZHEJIANG JIALONG ELECTRON CO.,LTD             | RV-15                       | 250VAC, 6(4)A,<br>T125, 1E4                                         | IEC 61058-1                     | TUV<br>R50408240                           |
| Micro-switch                  | GUANGDONG YUSHUN ELECTRIC APPLIANCE LTD       | KW-5                        | 10(5)A,<br>125/250V~, 1E4,<br>T125, GWT 850                         | IEC 61058-1                     | CN52651-<br>A1/M1                          |
| PCB                           | XIAMEN TOPSUN ELECTRONIC TECHNOLOGY CO LTD    | TS-002,<br>TS-003           | Min. thickness:<br>1.0 mm, V-0                                      | IEC 60335-1<br>IEC 60335-2-14   | Tested with<br>the appliance<br>UL E252242 |

## Remark:

The "CRITICAL PARTS CHECK LIST" and "Check the CDF record photos "are based on the CB report (report No. EFGX26050538-IE-01-L01)

## (4) SERIAL NUMBER of INSPECTED UNITS

| SERIAL NUMBER FORMAT AND RANGE: | The numbers below                                                                    |
|---------------------------------|--------------------------------------------------------------------------------------|
|                                 |  |

## (5) DATA TEST

| NO.    | Test Item \Serial NO.                                                                                                                                                             | 0093     | 0646 | 0251 | 0174 | 0704 | 0351     | 0549 | 0602 | Blank | Blank |
|--------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|----------|------|------|------|------|----------|------|------|-------|-------|
| 1      | 1500ML blending jar no-load power (with clutch) : Setting 1: (280-342W)                                                                                                           | 317      | 320  | 313  | 318  | 316  | 322      | 314  | 315  | Blank | Blank |
|        | 1500ML blending jar no-load power (with clutch) : Setting 2: (408-525W)                                                                                                           | 468      | 461  | 459  | 467  | 463  | 462      | 463  | 469  | Blank | Blank |
|        | 1500ML blending jar no-load power (with clutch) : Setting P: (408-525W)                                                                                                           | 461      | 466  | 459  | 462  | 466  | 467      | 468  | 458  | Blank | Blank |
| 2      | Chopper jar power(with S blade): Setting 1: (240-420W)                                                                                                                            | 317      | 322  | 324  | 315  | 319  | 317      | 315  | 320  | Blank | Blank |
|        | Chopper jar power(with S blade): Setting 2: (345-610W)                                                                                                                            | 475      | 477  | 473  | 480  | 476  | 472      | 478  | 477  | Blank | Blank |
|        | Chopper jar power(with S blade): Setting P: (330-635W)                                                                                                                            | 473      | 476  | 479  | 472  | 478  | 472      | 480  | 473  | Blank | Blank |
| 3      | Blending water power (1500ML rated capacity water): 772-944W                                                                                                                      | 819      | 822  | 818  | 816  | 823  | 821      | 817  | 816  | Blank | Blank |
| 4      | Blending Water Test (1min)                                                                                                                                                        | PASS     | PASS | PASS | PASS | PASS | PASS     | PASS | PASS | Blank | Blank |
| 5      | Jar Leakage Test (1Hour)                                                                                                                                                          | PASS     | PASS | PASS | PASS | PASS | PASS     | PASS | PASS | Blank | Blank |
| Remark | The items (number1 to 5) are tested according to the S-2 standard,8 products are selected for testing, and the test results are as above.                                         |          |      |      |      |      |          |      |      |       |       |
| NO.    | Test Item \Serial NO.                                                                                                                                                             | 0446     | 0350 | 0448 | 0293 | 0050 | 0139     | 0043 | 0046 | 0301  | 0254  |
| 6      | Hi-Pot Check (1500V/5mA/2s)                                                                                                                                                       | PASS     | PASS | PASS | PASS | PASS | PASS     | PASS | PASS | PASS  | PASS  |
| 7      | Leakege Current Test ( $\leq 0.25\text{mA}$ )                                                                                                                                     | PASS     | PASS | PASS | PASS | PASS | PASS     | PASS | PASS | PASS  | PASS  |
| 8      | Cord Length ( $85\pm 5\text{cm}$ )                                                                                                                                                | FAIL     | FAIL | FAIL | FAIL | FAIL | FAIL     | FAIL | FAIL | FAIL  | FAIL  |
| Remark | 1、The above items (number6 to 8) are tested according to the G II standard, and the data is only part of the test results, because the space limit does not show all the results. |          |      |      |      |      |          |      |      |       |       |
| NO.    | Test Item \Serial NO.                                                                                                                                                             | 0638     |      |      |      |      | 0363     |      |      |       |       |
| 9      | No-load Speed Test (21240-25960rpm)                                                                                                                                               | 23344rpm |      |      |      |      | 23053rpm |      |      |       |       |

|        |                                                                                                                                                                         |         |      |      |         |      |
|--------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------|------|------|---------|------|
| NO.    | Test Item \Serial NO.                                                                                                                                                   | 0587    |      |      | 0364    |      |
| 10     | Noise Test ≤90dB, 1m                                                                                                                                                    | 80. 9dB |      |      | 81. 3dB |      |
| NO.    | Test Item \Serial NO.                                                                                                                                                   | 0155    |      |      | 0076    |      |
| 11     | Tumbler Capacity:<br>600mL±30mL                                                                                                                                         | 605mL   |      |      | 604mL   |      |
|        | 1500ML blending jar<br>Capacity: 1500±75mL                                                                                                                              | 1444mL  |      |      | 1445mL  |      |
| Remark | The items (number9 to 11) are tested according to the Finished product inspection specification,2 products are selected for testing, and the test results are as above. |         |      |      |         |      |
| NO.    | Test Item \Serial NO.                                                                                                                                                   | 0074    | 0681 | 0478 | 0250    | 0091 |
| 12     | Knob: Setting 1 force:<br>0. 2-1. 7kgf. cm;<br>Setting 2 force: 0. 2-<br>2. 0kgf. cm<br>Setting P force: 0. 3-<br>2. 5kgf. cm.                                          | PASS    | PASS | PASS | PASS    | PASS |
|        | Blending jar assembly<br>and main base: Locking<br>force is 10-35kgf. cm and<br>un-lockingforce is 25-<br>55kgf. cm.                                                    | PASS    | PASS | PASS | PASS    | PASS |
|        | Blending jar and jar<br>base: Locking force is<br>30kgf. cm. And un-locking<br>force is 18. 5-30kgf. cm.                                                                | PASS    | PASS | PASS | PASS    | PASS |
|        | Blending jar and jar<br>lid: Open force is 1. 3-<br>4kgf. cm, and close force<br>is 0. 8-4kgf. cm.                                                                      | PASS    | PASS | PASS | PASS    | PASS |
|        | Blending jar lid and<br>cap: Locking force is<br>1. 5-17. 5kgf. cm and un-<br>locking force is 2. 5-<br>17. 5kgf. cm.                                                   | PASS    | PASS | PASS | PASS    | PASS |
|        | Grinder and grinder<br>base: Locking force is<br>30kgf. cm, and un-locking<br>force is 12. 5-<br>31. 5kgf. cm.                                                          | PASS    | PASS | PASS | PASS    | PASS |
|        | Grinder assembly and<br>main base: Locking force<br>is 5-30kgf. cm and un-<br>locking force is 5-<br>30kgf. cm.                                                         | PASS    | PASS | PASS | PASS    | PASS |



INSPECTION REPORT

REPORT NO. : LZX20260811-2

|                            |                                                                                                                                                                   |                                                                                                                                                             |      |      |      |              |
|----------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------|------|------|------|--------------|
|                            | Chopper and chopper base: Locking force is $\leq$ 30kgf.cm and un-locking force is 15-35kgf.cm.                                                                   | PASS                                                                                                                                                        | PASS | PASS | PASS | PASS         |
|                            | Chopper assembly and main base: Locking force is 5-30kgf.cm and un-locking force is 5-30kgf.cm.                                                                   | PASS                                                                                                                                                        | PASS | PASS | PASS | PASS         |
|                            | Tumbler lid and jar: Locking force is 30kgf.cm and un-locking force is 20.5-36kgf.cm.                                                                             | PASS                                                                                                                                                        | PASS | PASS | PASS | PASS         |
|                            | Tumbler lid and cap: Open force is 2-10kgf.cm and close force is 1.5-10kgf.cm.                                                                                    | PASS                                                                                                                                                        | PASS | PASS | PASS | PASS         |
| Remark                     | The item (number12) is tested according to the Finished product inspection specification, 5 products are selected for testing, and the test results are as above. |                                                                                                                                                             |      |      |      |              |
| NO.                        | Test Item \Serial NO.                                                                                                                                             | 0198                                                                                                                                                        |      |      |      |              |
| 13                         | Power cord tension as per IEC60335-1 requirement $\geq$ 6kgf                                                                                                      | PASS                                                                                                                                                        |      |      |      |              |
| (6) INFORMATION CHECK LIST |                                                                                                                                                                   |                                                                                                                                                             |      |      |      |              |
| NO.                        | Item                                                                                                                                                              | DETAILS/POSITION                                                                                                                                            |      |      |      | Result       |
| 1                          | VOLTAGE SYSTEM                                                                                                                                                    | 220-240V, 50-60Hz, 1000W                                                                                                                                    |      |      |      | P            |
| 2                          | BAR CODE                                                                                                                                                          | ON GIFT BOX 8809686405497                                                                                                                                   |      |      |      | P            |
| 3                          | ACCESSORIES                                                                                                                                                       | User manual*1、Grinder Jar with Blade Base (300mL) *1、Tumbler Jar (600mL) *1、Chopper Jar with Blade Base (450mL) *1、Blending Jar with Blade Base (1500mL) *1 |      |      |      | P            |
| 4                          | Printing                                                                                                                                                          | The PE bags and user manual printing match the reference drawings                                                                                           |      |      |      | P            |
| (7) OTHER                  |                                                                                                                                                                   |                                                                                                                                                             |      |      |      |              |
| Item                       | Inspection Standard                                                                                                                                               | DETAILS                                                                                                                                                     |      |      |      | 结果<br>Result |
| Drop Test                  | ISTA-1A                                                                                                                                                           | Carton Box GROSS WEIGHT: 4.51kg<br>DROP TEST SEQUENCE: 760mm<br>SAFETY : PASS<br>FUNCTION : PASS<br>APPEARANCE : PASS                                       |      |      |      | P            |
| Carton size                | 387×243×379mm                                                                                                                                                     | 385×246×382mm                                                                                                                                               |      |      |      | P            |



INSPECTION REPORT

REPORT NO. : [LZX20260811-2](#)

|                                               |                        |                                     |   |
|-----------------------------------------------|------------------------|-------------------------------------|---|
| Gift Box Size                                 | 372×230×359mm          | 370×230×360mm                       | P |
| HOTOEM Information Technology Company Limited | Liang Zixuan           | Li Yanlin                           |   |
| REPORTED BY                                   | INSPECTOR' S SIGNATURE | FACTORY' S REPRESENTATIVE SIGNATURE |   |