Main Features

1. Automatic scan Com Port/Network
2. Support firmware upgrade
3. Support Export Config/Import Config
4. Multiple country languages
5. Global frequency(860~960MHz)
6. Password mode
7. Read specify tag
8. Relay
9. Data cache
10. Multiple customized communication protocols
11. Remote listening
12. RSSI

Technical Parameter

Model & Interface	STF91E,RS232.WG26.Relay STF92E,RS232.WG26.Relay ,TCP/IP (RJ45) STF93E.RS232.WG26.Relay ,POE STF94E,RS232.WG26.Relay ,WIFI STF95E,RS232.WG26.Relay ,WIFI,POE
Engine	Design based on Impinj E710 chip
Frequency	865-868MHz(EU),902-928MHz(US)

Protocol	ISO18000-6B/6C(EPC GEN2)
Built in antenna	9dbi antenna
Work mode	Active mode Answer mode Password mode Trigger mode
Special Functions	Support firmware/hardware upgrade online Support multiple development languages(customized) Support relay +password trigger relay work Support data caching when network disconnect Support RSSI
RF power	30dbm(adjustable)
Reading distance	10~15 meter (depends on tag)
Communication interface	Standard：RS232.WG26.Relay Optional：TCP/IP(RJ45),POE,WIFI 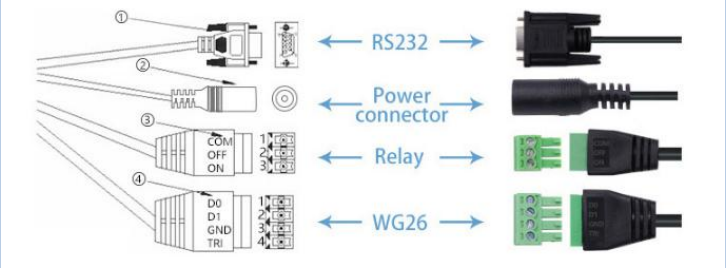
Power supply	12V 2A (Max 24V)
Working temperature	-10~+55℃
Storgate temperature	-20~+75℃
Reader size	305*305*60mm
Net weight	3Kg
Package Size	430*370*150mm
Gross weight	5kg

Detailed image

01 **Spare parts:1pc reader,1pc power adapter,1pc plug,1pc installation bracket**

Install bracket Power adapter US plug EU plug CHN plug

02 Reader dimension:

Front side

Back side

Reader size:305*305* 60mm

03 Interface:

- Standard Interface:RS232/WG/Relay
- Optional Interface: TCP/IP/POE/WIFI

Power		RS232			WG				Relay		
12V	GND	TX	RX	GND	D0	D1	GND	TGIN	NO	NC	COM
red	black	light green	yellow	pink	green	white	brown	blue	purple	orange	grey

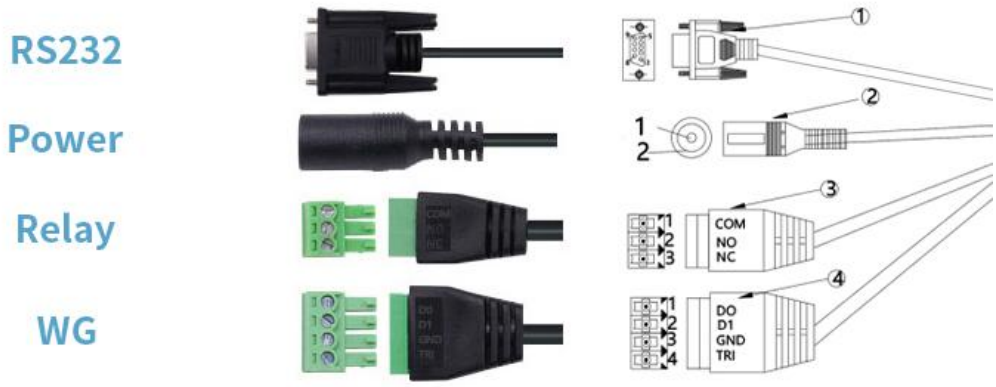

04 Package:

- Package size:430*370*150mm
  Package weight: 5kg