



PRISM feasibility screening: Ge(880) von Hamos + 2 mm CZT

Ag K-edge photon-budget waterfall
40 kV, 2 kW W-tube screening case

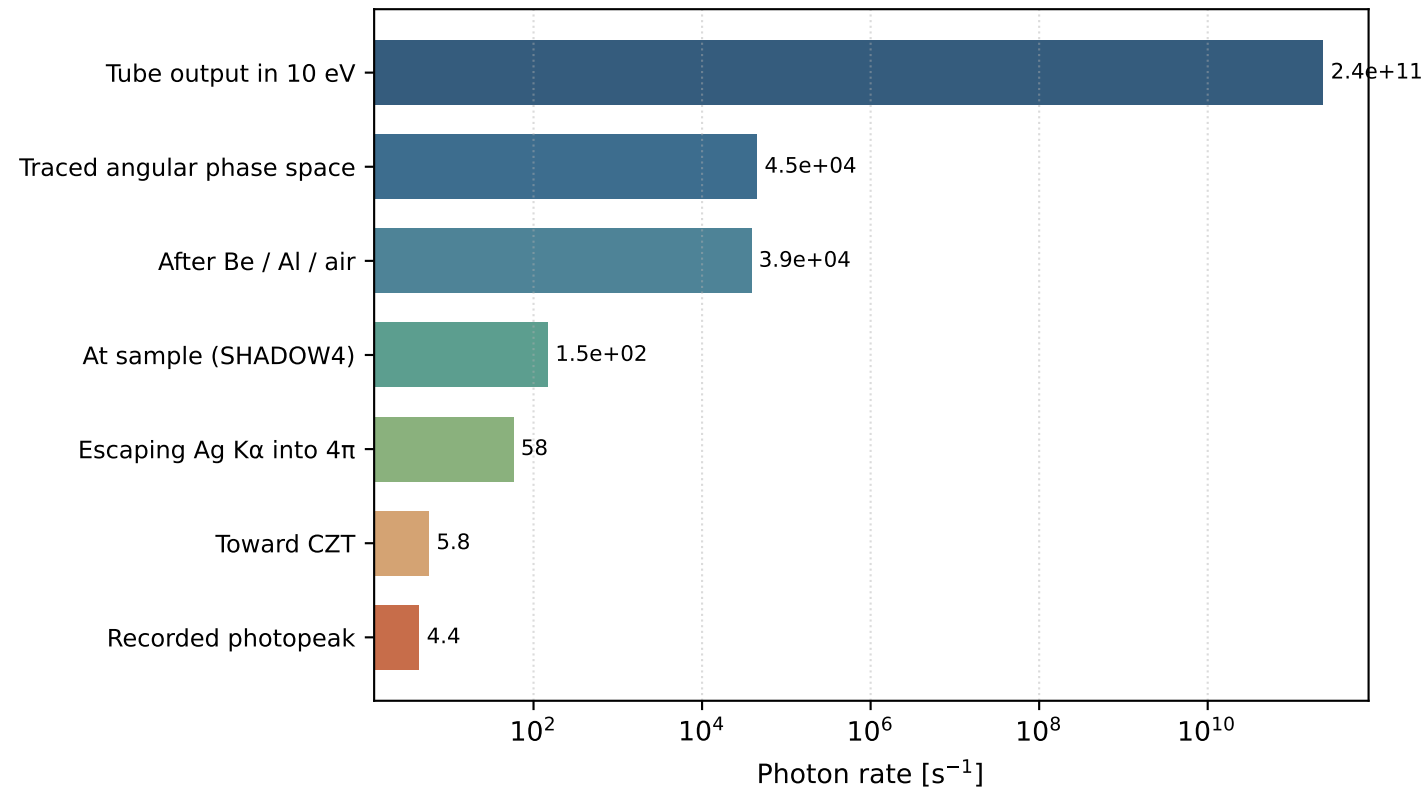

Conservative SNR=20 per point
background/signal = 1

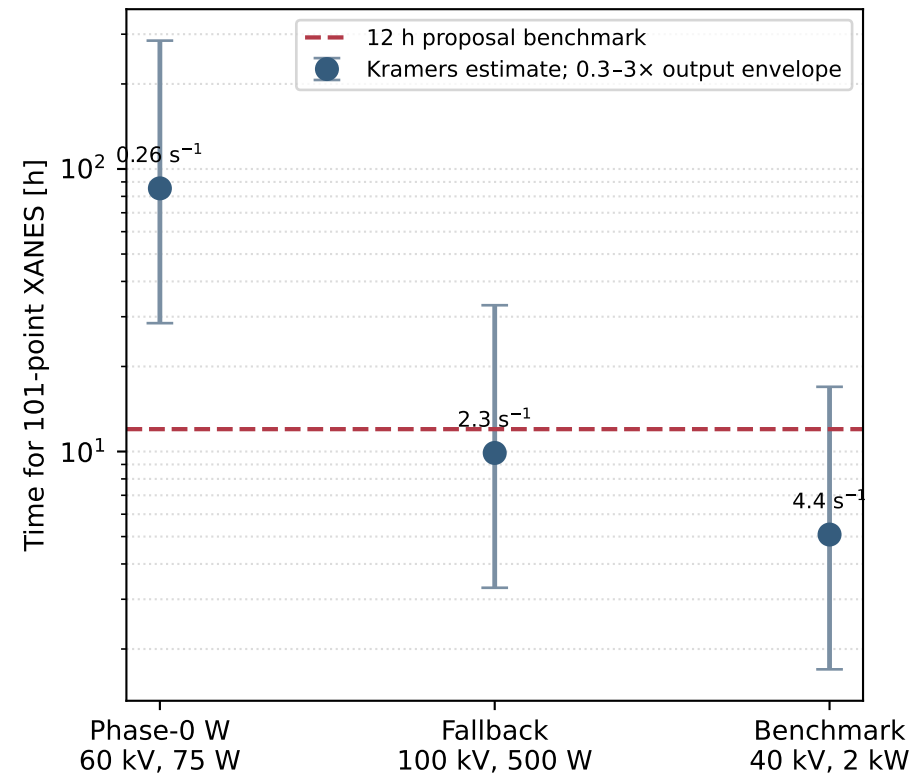

Reference case: 25.52 keV, 10 eV resolution element, 20 μm Ag foil, $40 \times 40 \text{ mm}^2$ CZT at 30 mm. Absolute tube output is not vendor-calibrated.