

Final Test Datasheet

www.microxray.com



MICRO X-RAY INC
370 Encinal St. Suite 200
Santa Cruz, CA 95060
(831) 207-4900

Product Information

Part No.: 18358
Target Material: Mo
Drawing No.: 11005
Country of Origin: USA

Anode Voltage Range: 4kV to 60kV
Max Anode Current: 1 mA
Max Filament Current: 1.7 A
Max Anode Power: 50 W
Other Specifications:

Max Package Temp: 55° C
Special Instructions:

Manufactured For:

ELSE NUCLEAR S.r.l.

Warning: Exceeding maximum ratings may result in permanent damage. Operation of this tube above the rating specified below will damage internal components and invalidate the warranty.

Tube Information and Test Results

Serial No: 18802
Manufacture Date: 2/18/2026
Warranty Expiration Date: 2/18/2027

Measured Filament Current: 1.53 A
Measured mA Standard Deviation: 0.006 A

Spot Photo Data and Photo Image


Specified Spot:

Spot Size: 150 μ m

Target Angle: 20°

Measured Spot:

Average Size: 83.8 μ m
Actual Width X: 103.0 μ m
Actual Width Y: 64.7 μ m
Position X: -305.082 μ m
Position Y: -464.7 μ m
Radial Position: 555.9 μ m

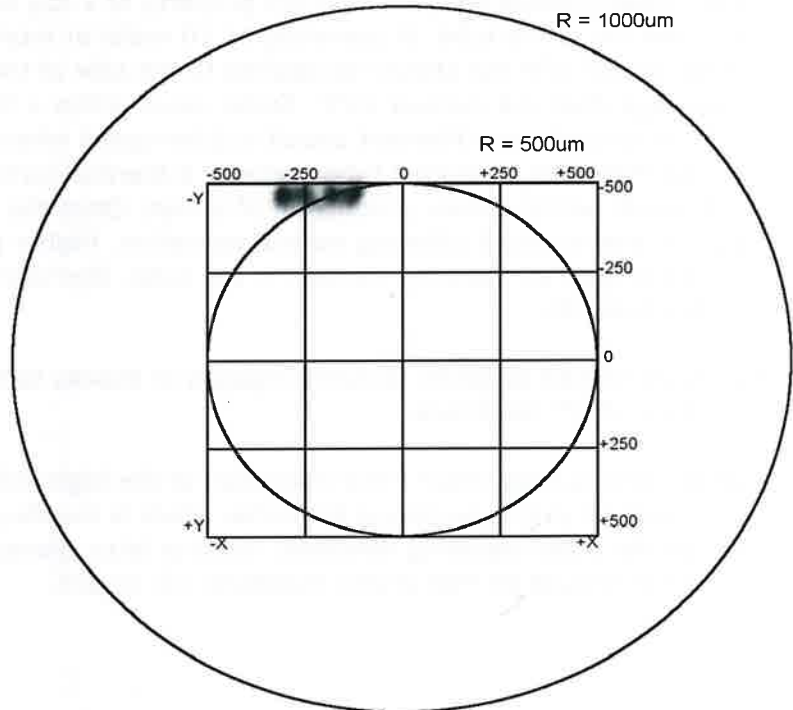

Inspected by

[Signature]

2/18/2026

Name

Date

It is hereby certified that this product is in conformance with the applicable requirements, specifications, and drawings.