



The Predictive Validation Process

Alternatively, we can move the non-deterministic model upstream to the embedded component, which is the main source of uncertainty (generally).

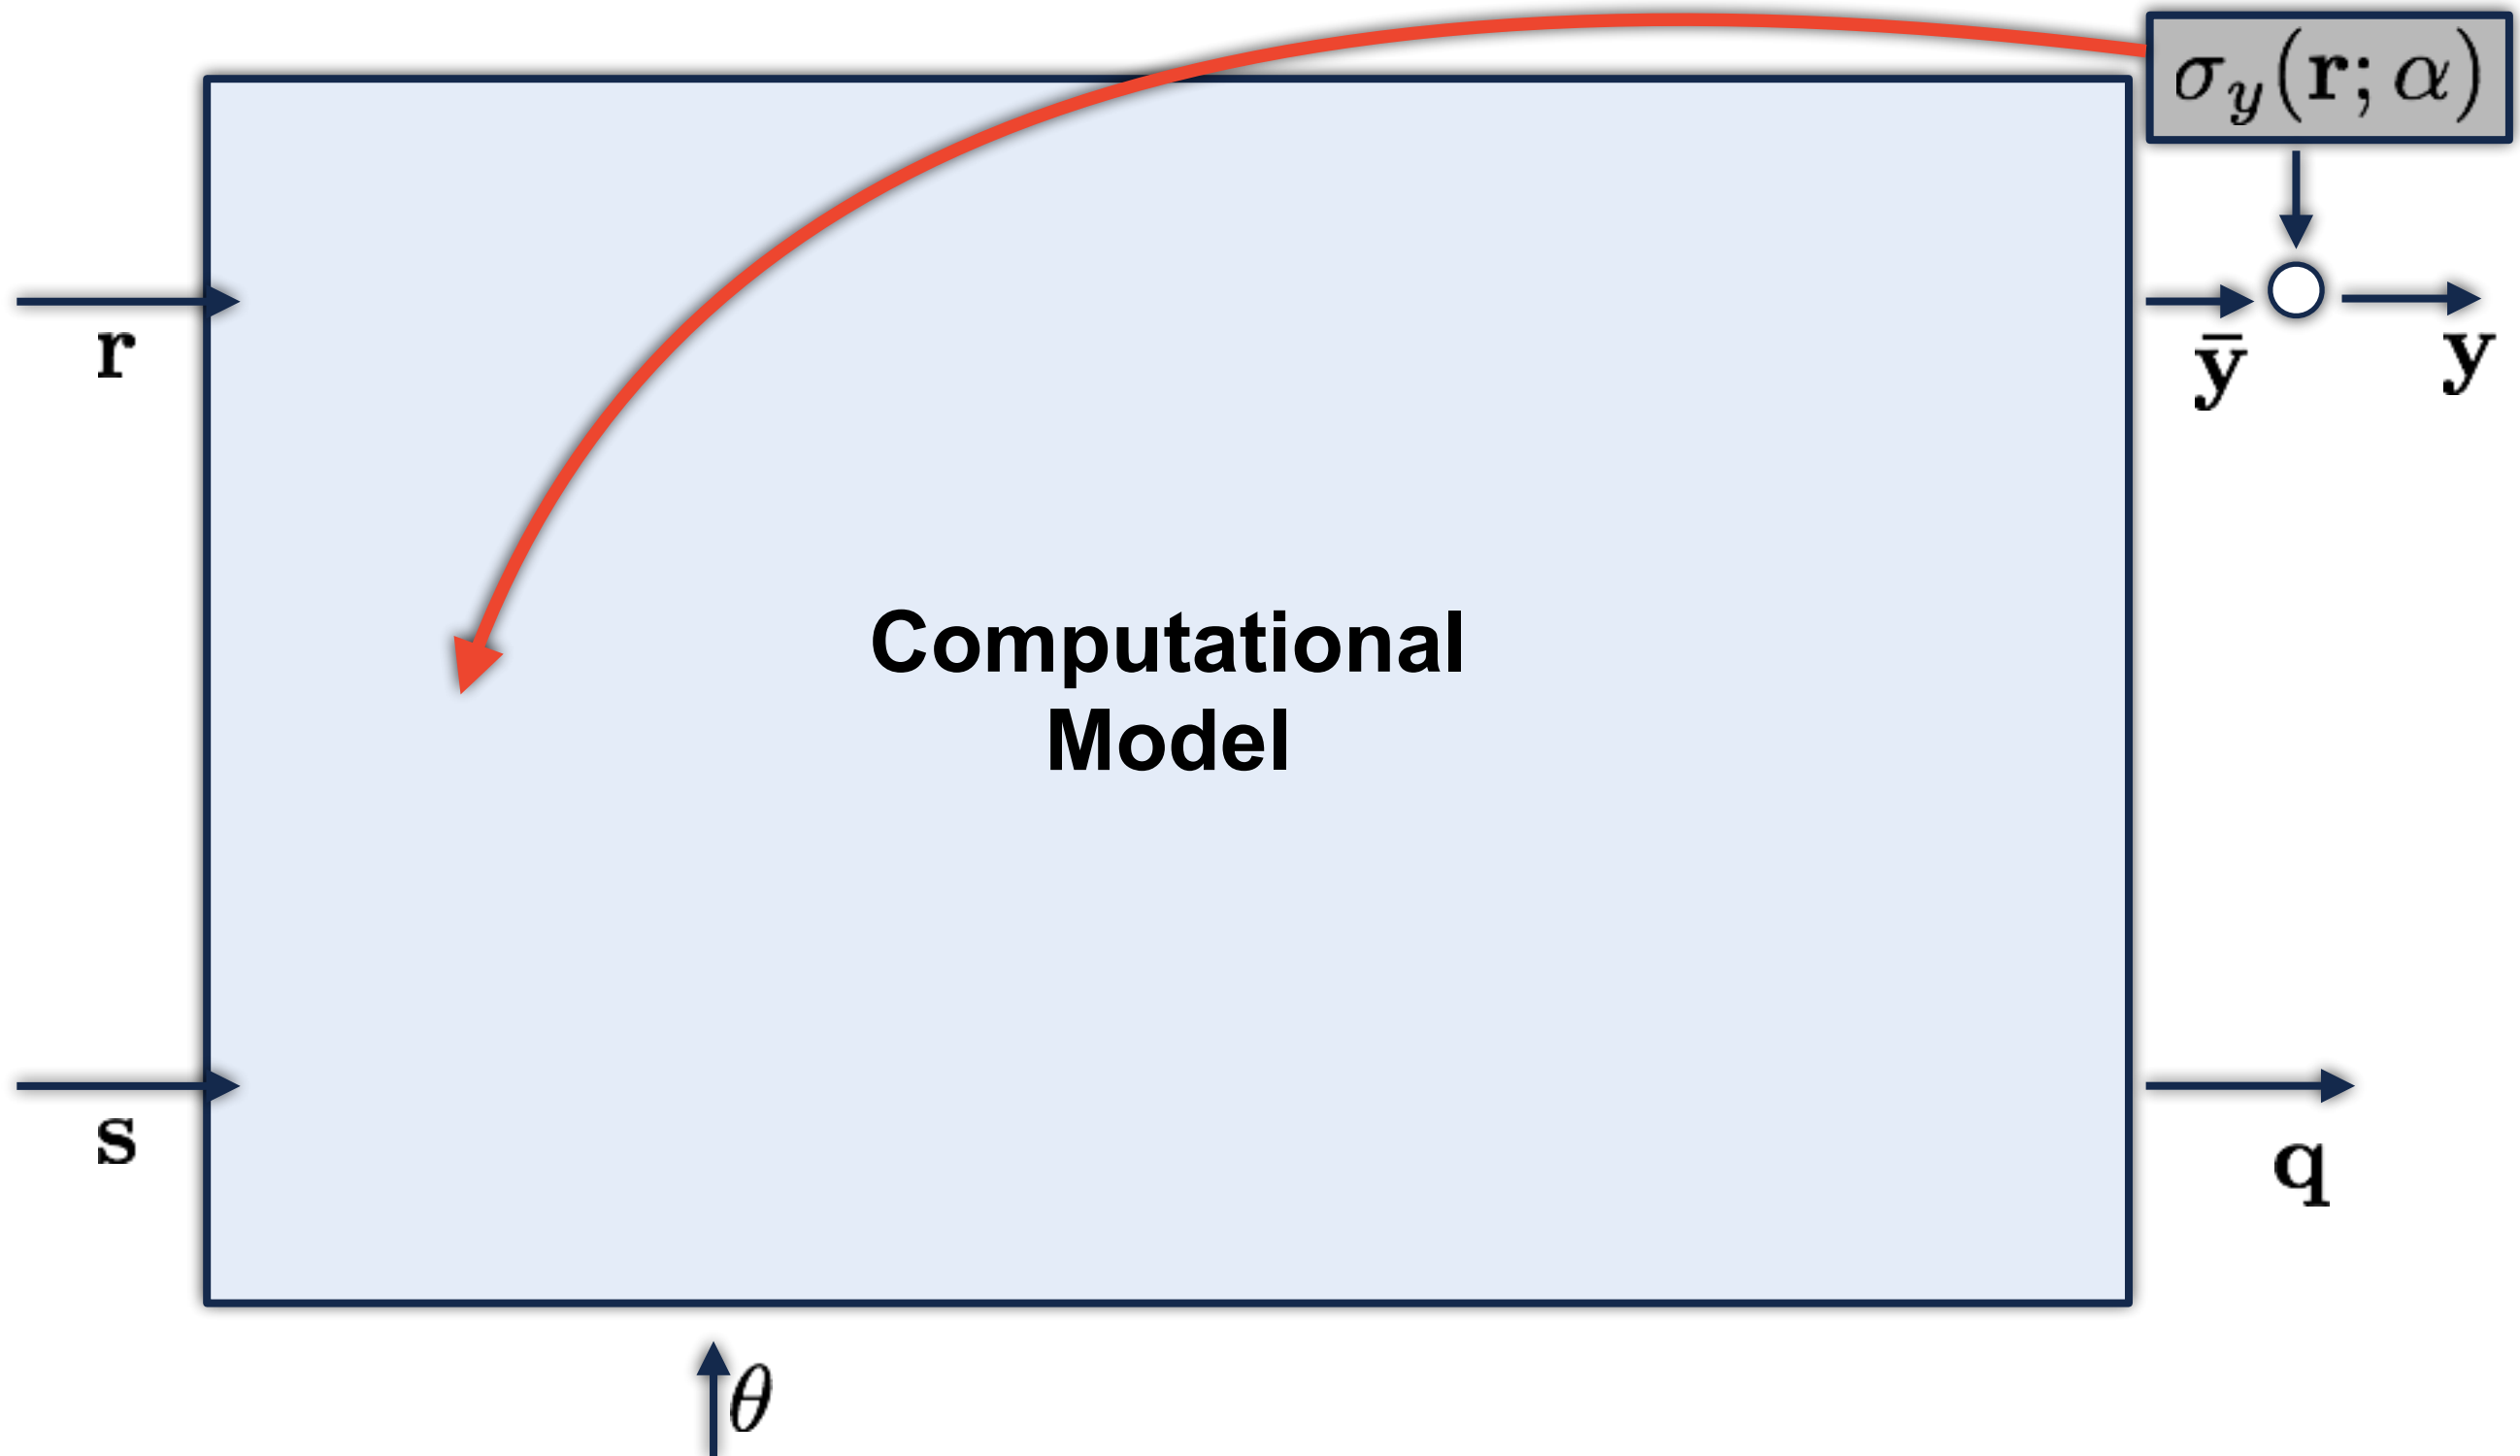

The Predictive Validation Process

Alternatively, we can move the non-deterministic model upstream to the embedded component, which is the main source of uncertainty (generally).

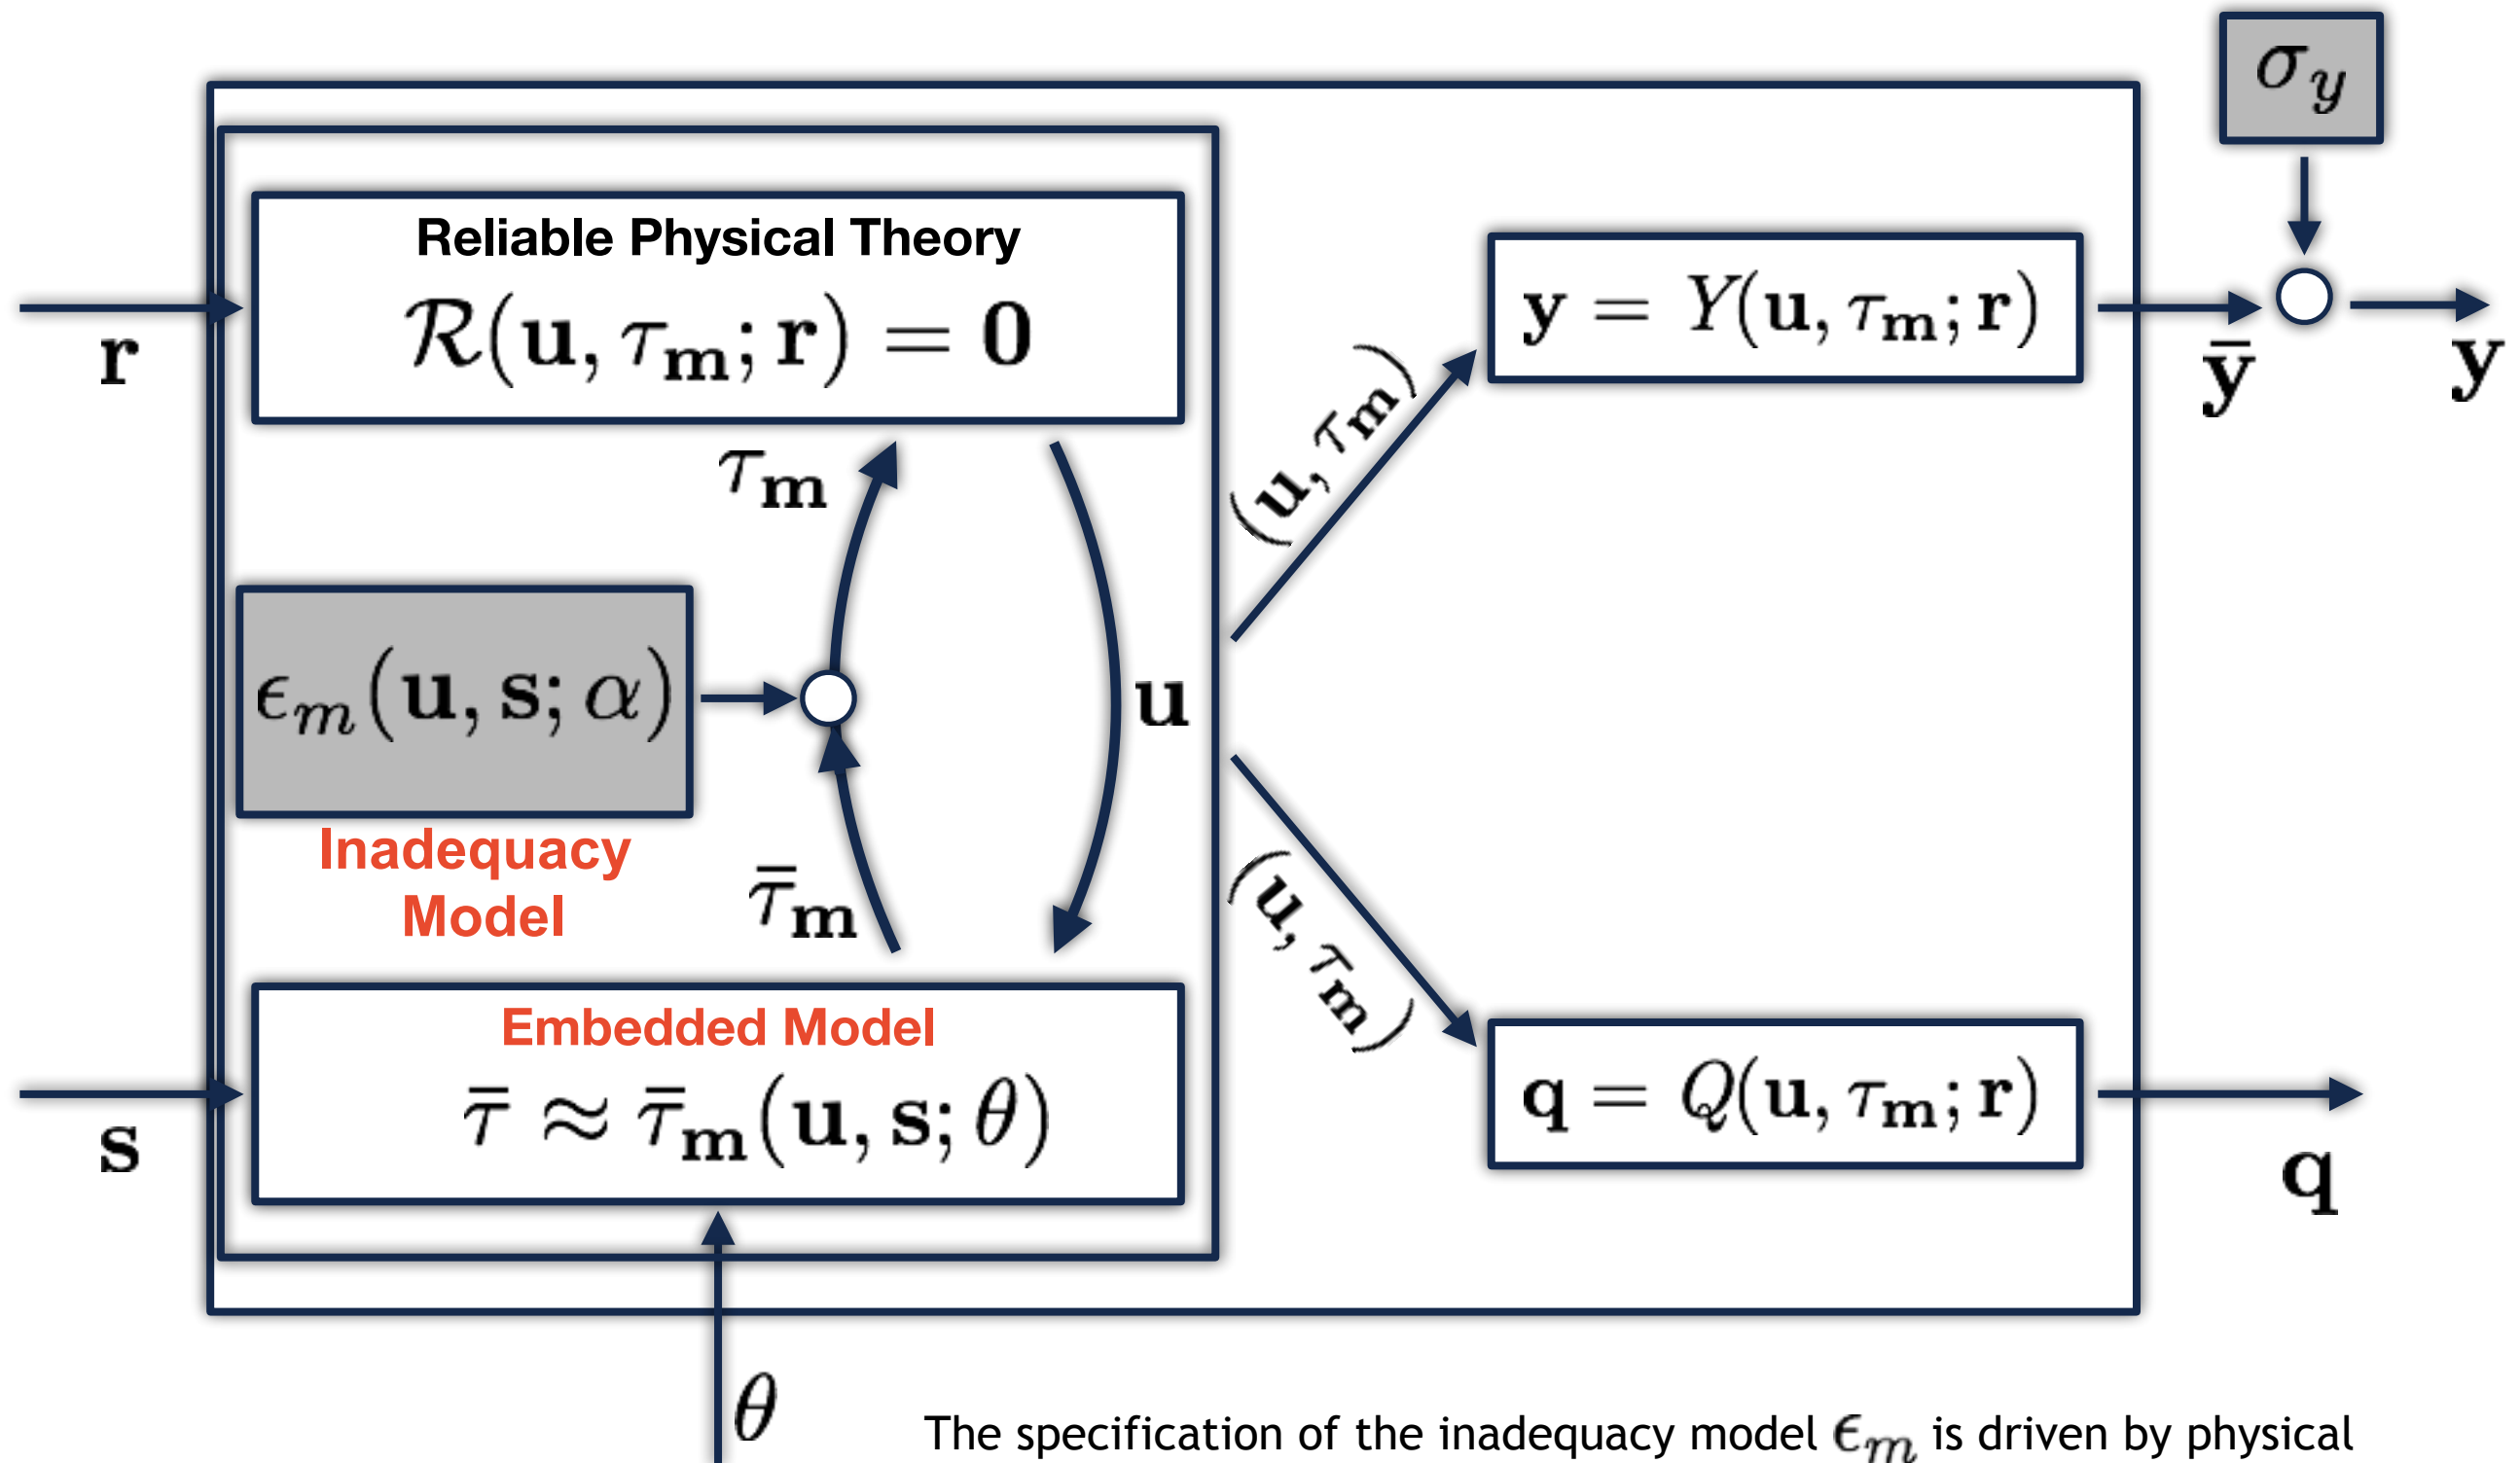

The specification of the inadequacy model ϵ_m is driven by physical knowledge about the nature of the error, and it is **problem-dependent**.