
Cutoff response · same knob settings


RESO 0 · dashed: before calibration · solid: after calibration

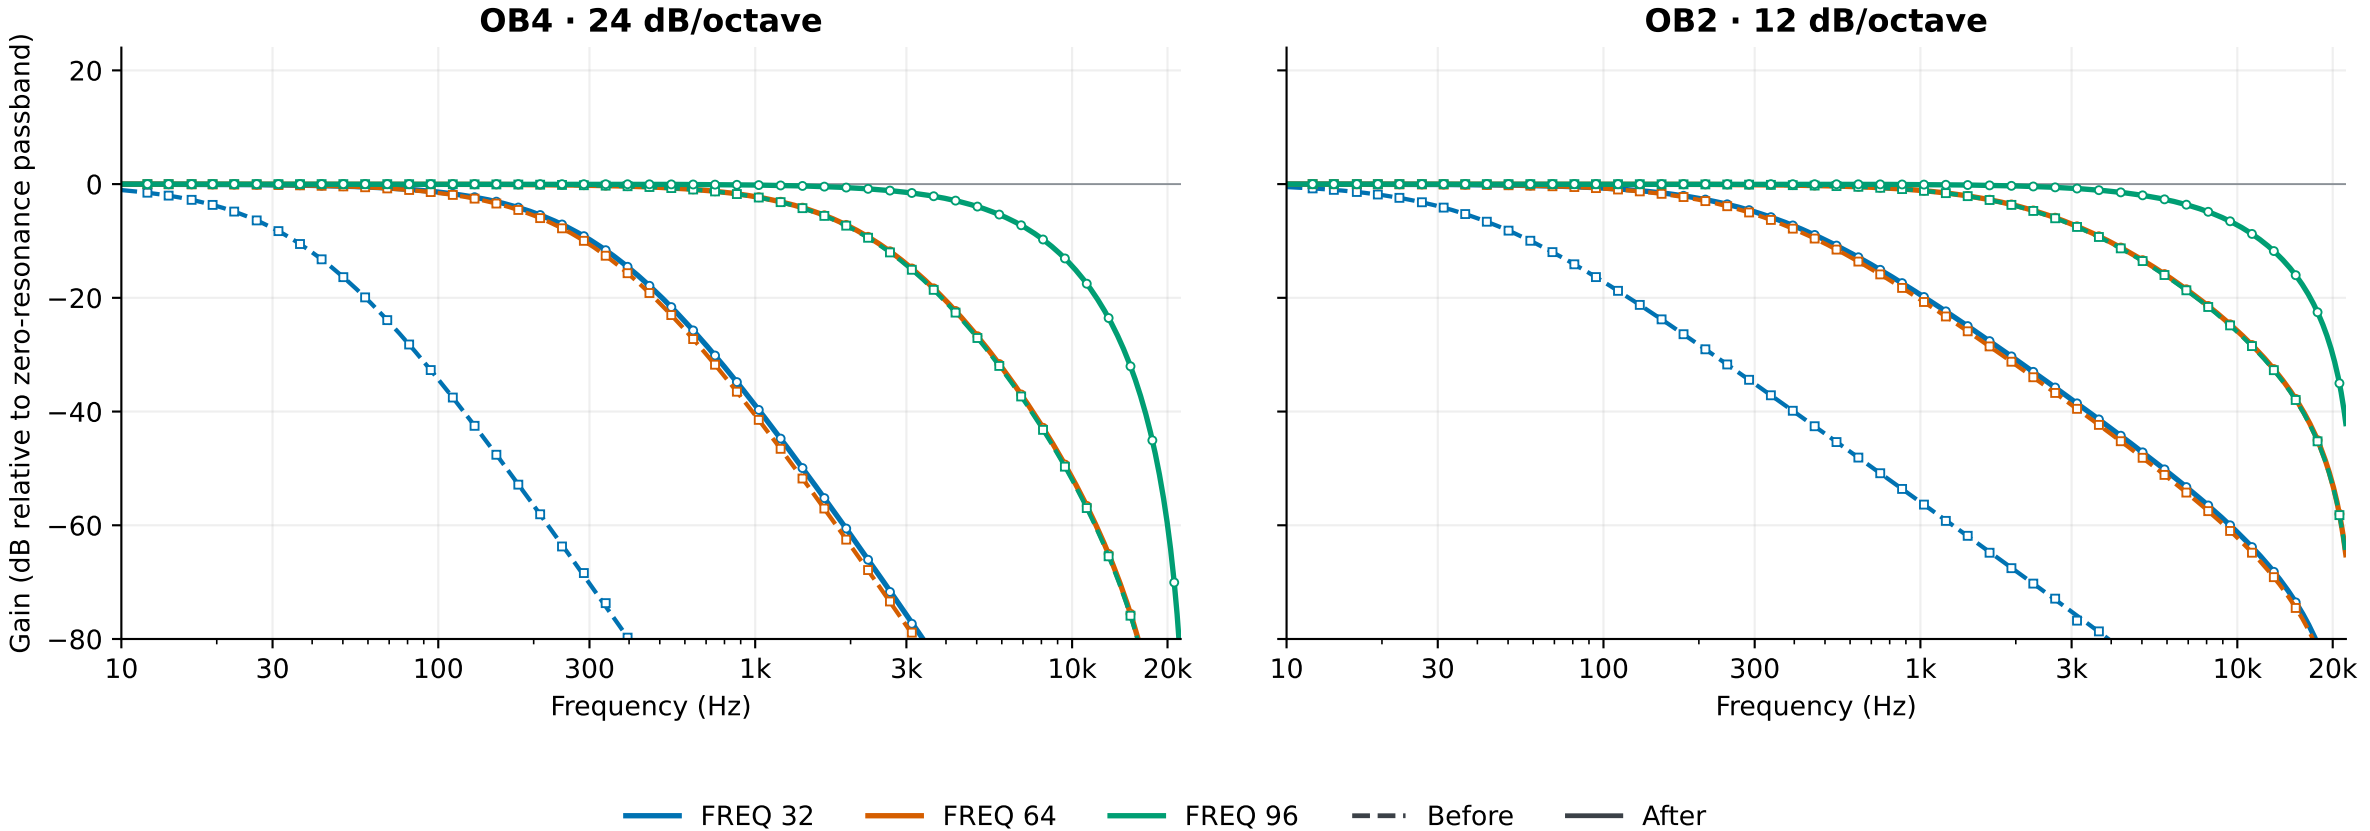

48 kHz · small-signal curves; markers: native C step-response renders in linear validation mode · fixed output gain removed equally

Resonance response · matched 1 kHz cutoff


FREQ before 81.05 / after 45.89 · all selected RESO settings below oscillation

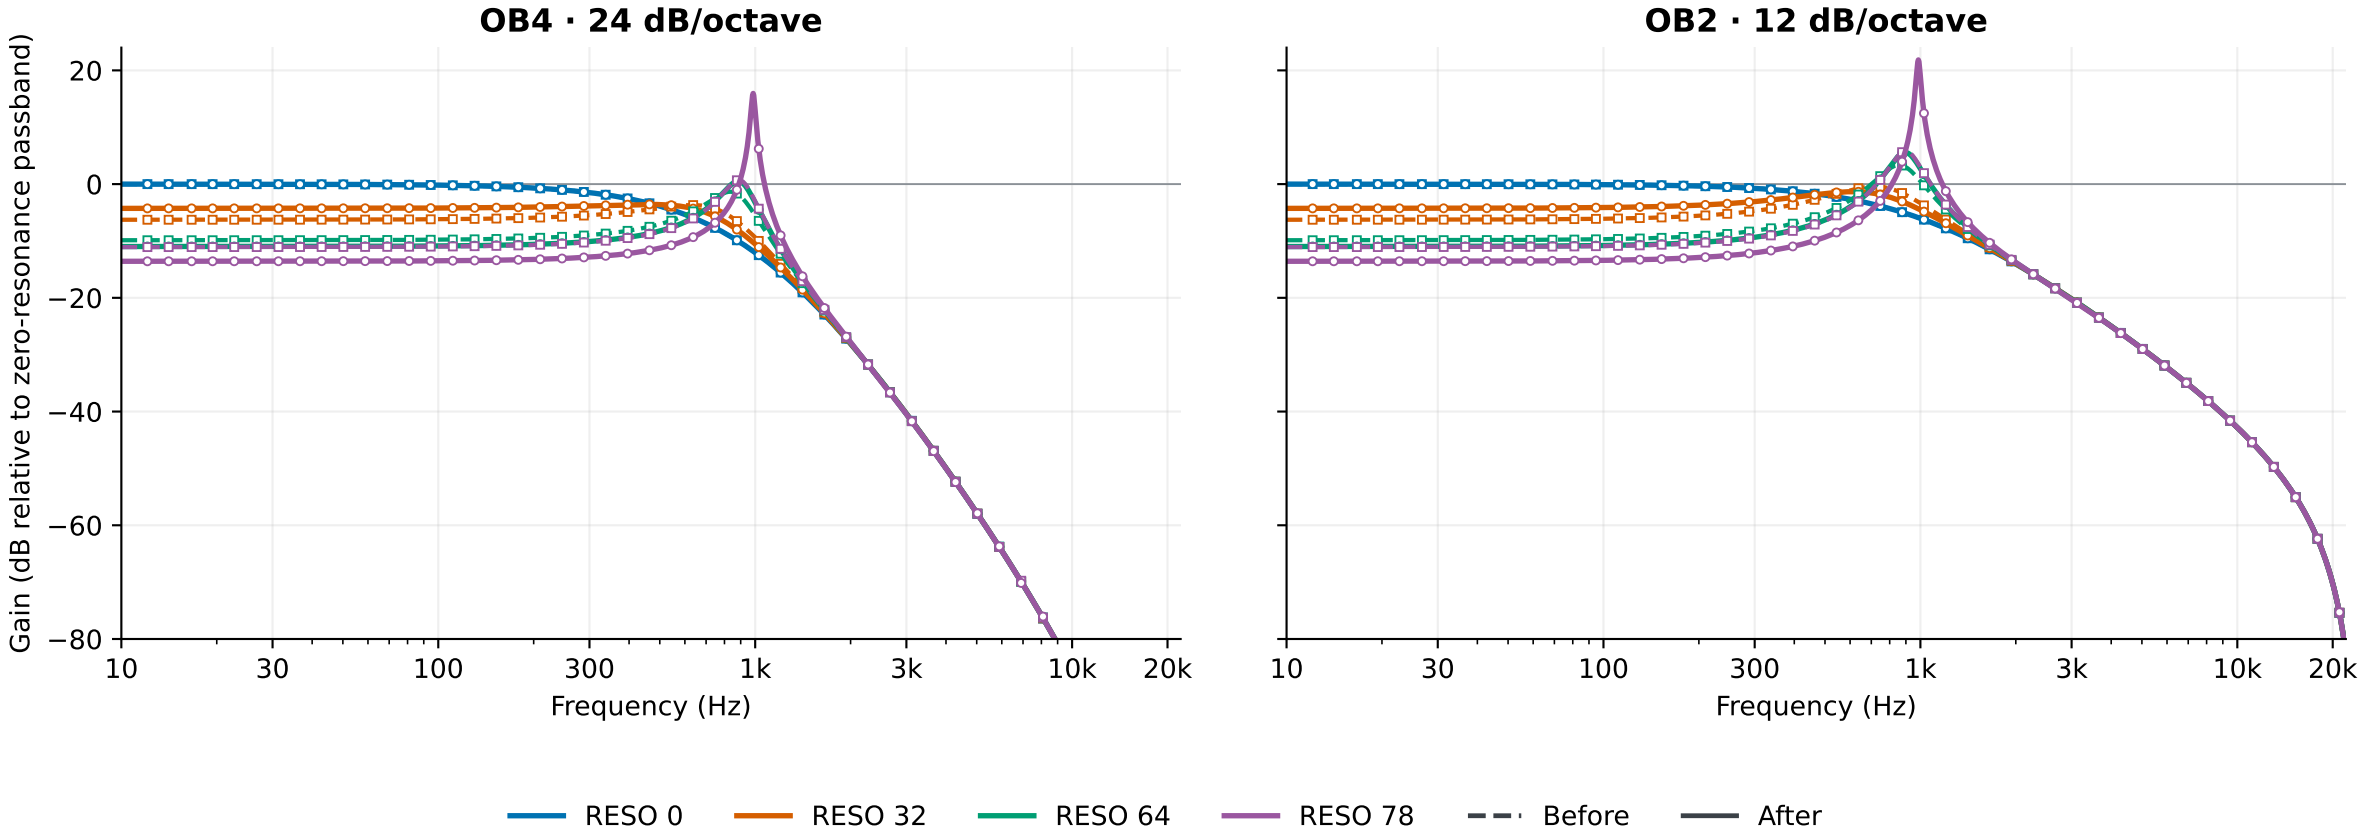


48 kHz · small-signal curves; markers: native C step-response renders in linear validation mode · fixed output gain removed equally

What changed at the controls

Calculated control mappings · the ladder structure, saturation and maximum feedback are retained

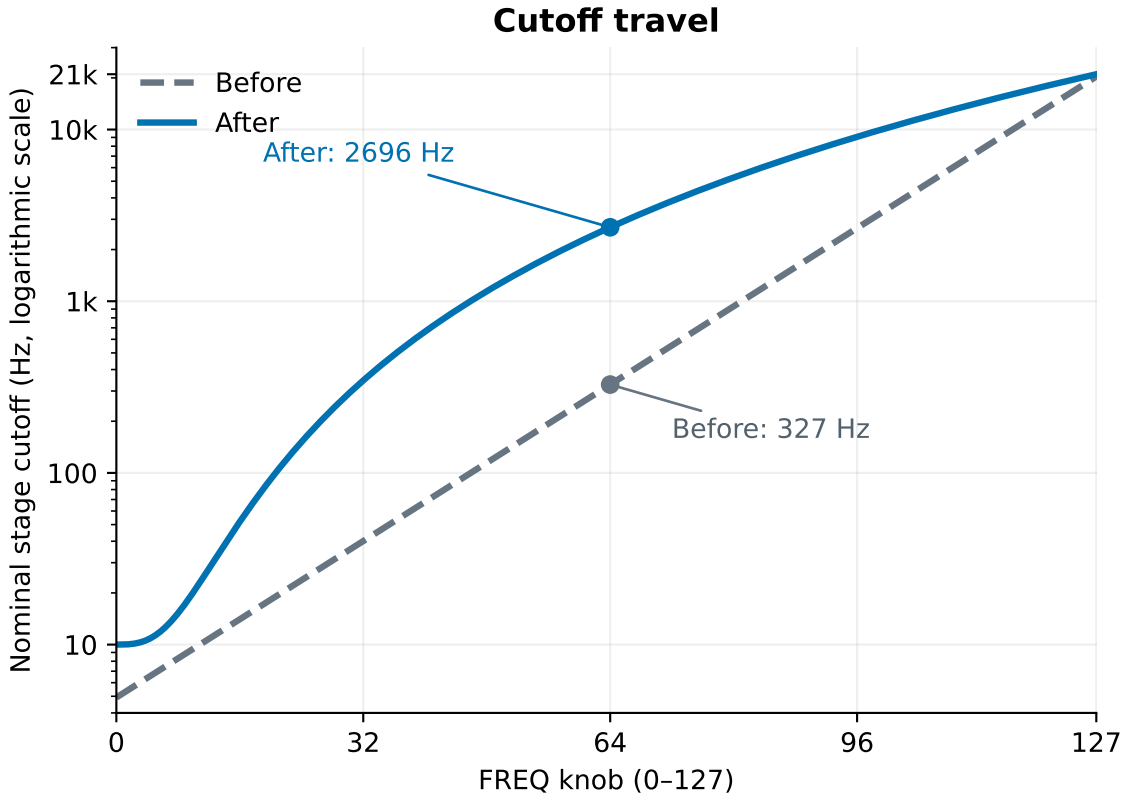

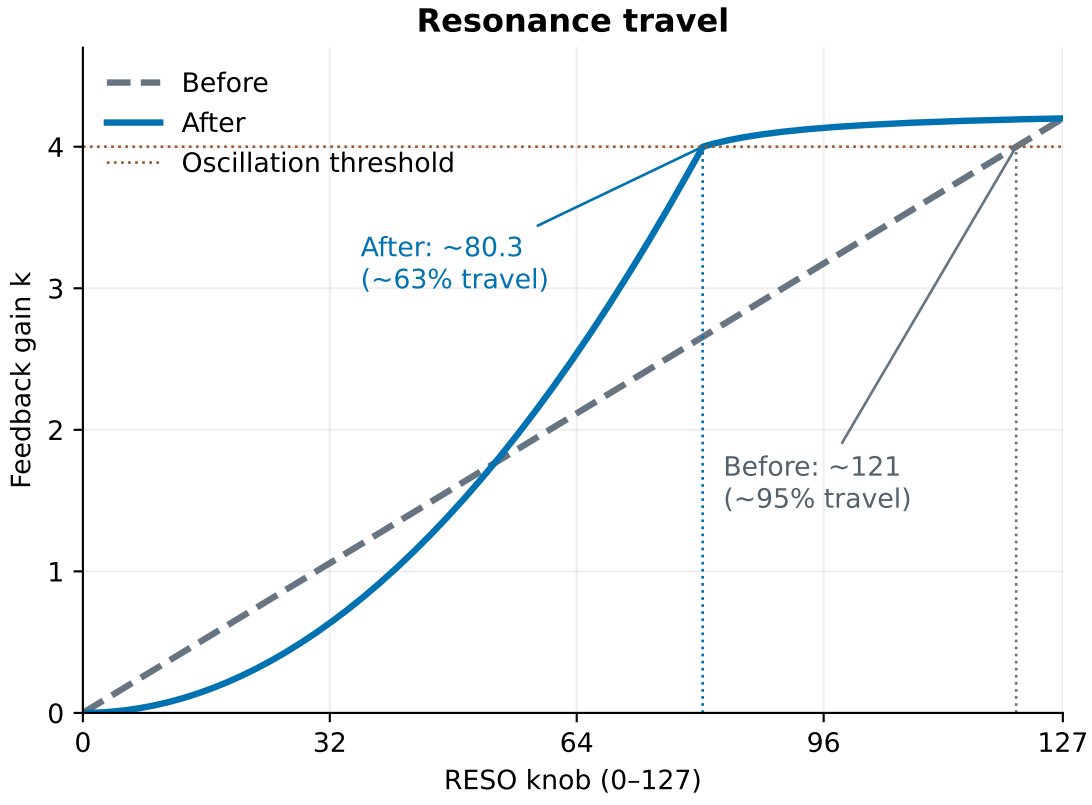

Before: master 404f72f · after: calibration 5e4f15b · these are implementation plots, not reference-plugin measurements