


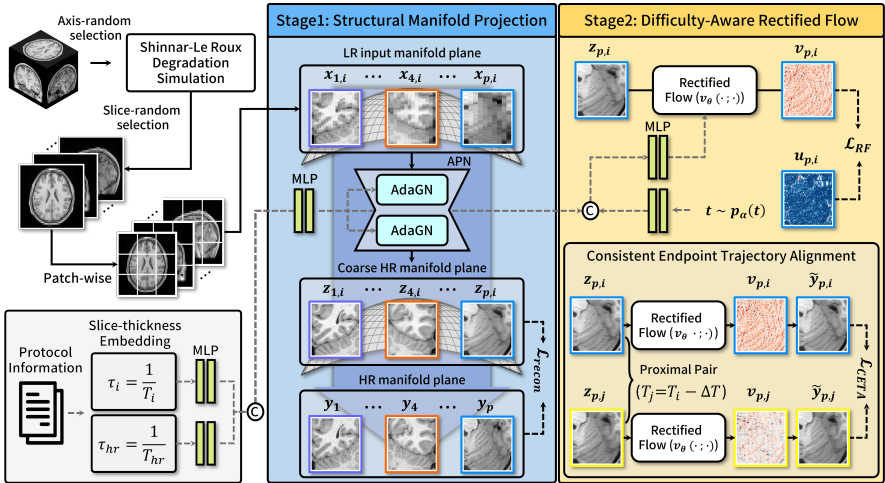

$x_{p,i}$: p -th LR patch under thickness condition i (slice thickness T_i)

$z_{p,i}$: Coarse HR patch predicted by APN

y_p : HR target patch at the fixed target slice thickness T_{hr}

$t \sim p_\alpha(t)$: Endpoint-biased timestep sampling ($t \approx 0, 1$)

$v_{p,i}$: Predicted velocity from the rectified flow model $v_\theta(\cdot; \cdot)$ at time t

$u_{p,i}$: Target velocity defined as the linear trajectory ($y_p - z_{p,i}$)

$\tilde{y}_{p,i}$: Estimated endpoint used for CETA ($z_{p,i} + v_{p,i}$)

⊙: Concatenate