



Shared H/O chain branching and mechanism-specific NHx termination shape the candidate flame


a POLIMI flame-speed sensitivity

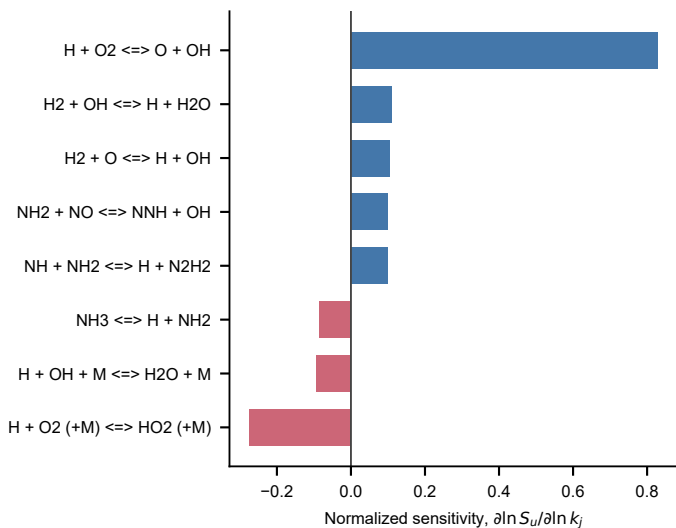


b Konnov flame-speed sensitivity

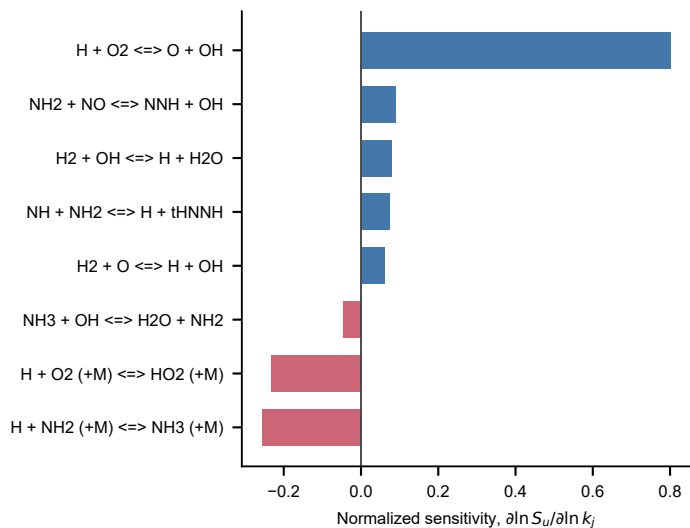

c Emission response to bounded heat loss

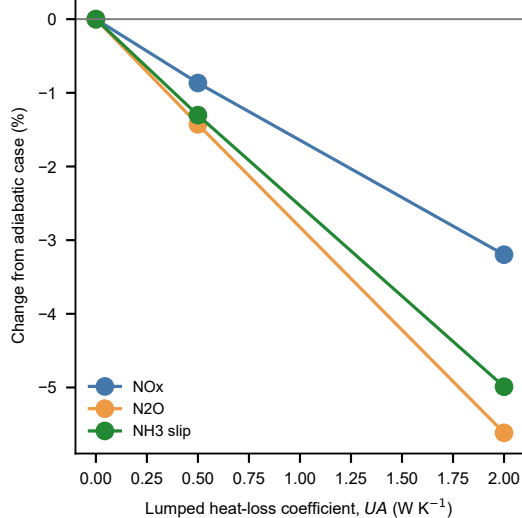

d Cracking-heat recovery sensitivity

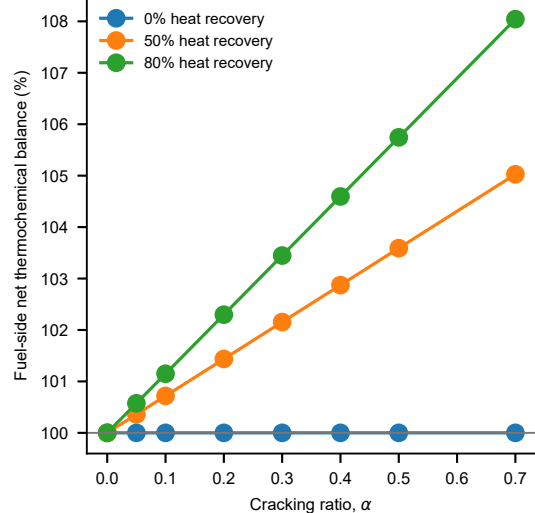

Sensitivity flame: 300 K, 5 bar, $\phi = 1.0$, $\alpha = 0.4$. Thermal panel: 750 K, 20 bar, 20 ms, $\alpha = 0.3$.