

A

B

C

D


E

F

(Scale 1:1)




1

1

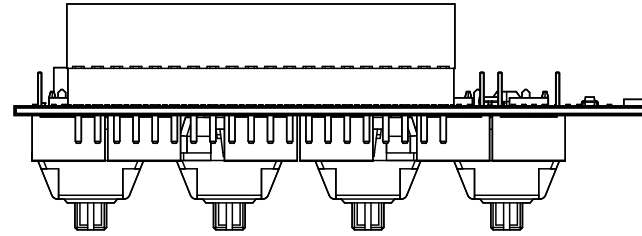

2



2

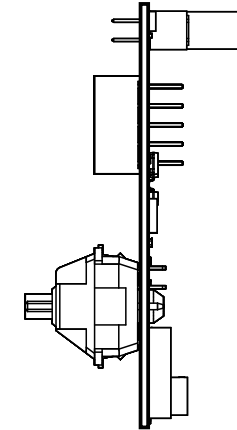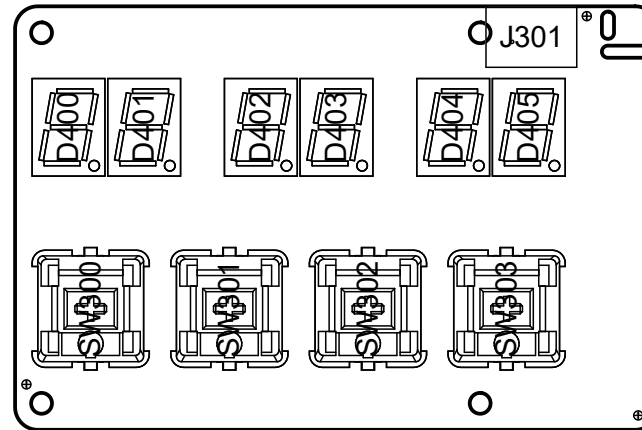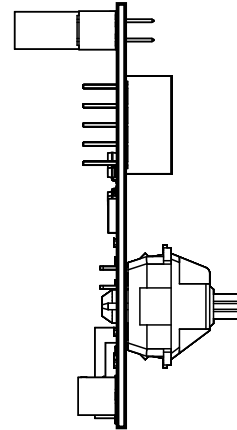

View from Top side (Scale 1:1)


3

3

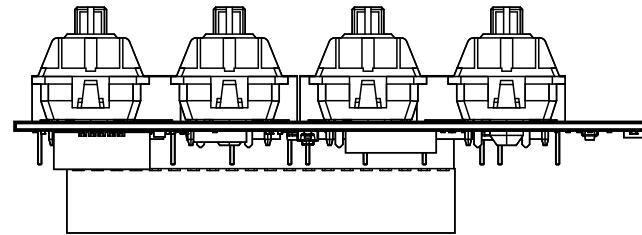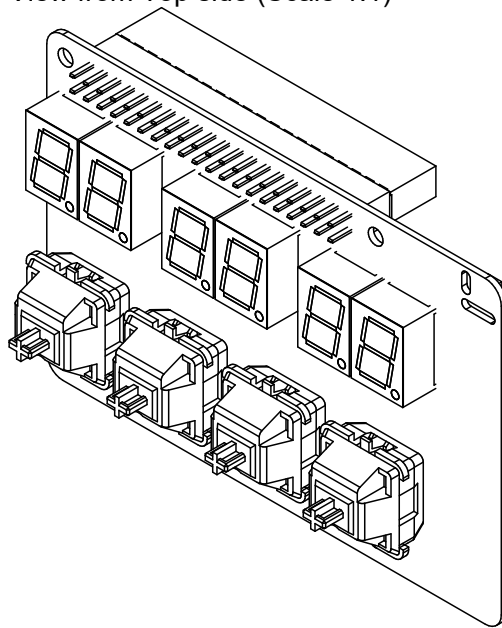

4

4

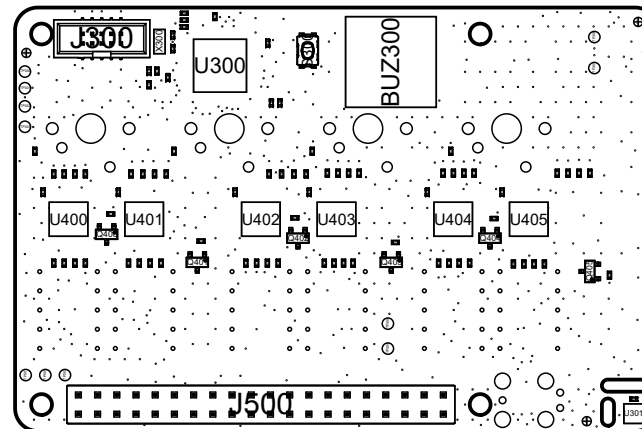

A

B



C

D

E

F

Layer Stack Legend

	Material	Layer	Thickness	Dielectric Material	Type	Gerber	Comment	Description
		Top Overlay			Legend	GTO		
	Surface Material	Top Solder	0.010mm	Solder Resist	Solder Mask	GTS		
	Copper	Top Layer	0.036mm		Signal	GTL		
	Prepreg		0.071mm	PP-006	Dielectric			
	CF-004	Layer 2	0.035mm		Signal	G1		Copper Foil
	Core		0.700mm	FR-4	Dielectric			
	CF-004	Layer 3	0.035mm		Signal	G2		Copper Foil
	Prepreg		0.071mm	PP-006	Dielectric			
	Copper	Bottom Layer	0.036mm		Signal	GBL		
	Surface Material	Bottom Solder	0.010mm	Solder Resist	Solder Mask	GBS		
		Bottom Overlay			Legend	GBO		
Total thickness: 1.004mm								

Drill Table

Symbol	Count	Hole Size	Plated	Hole Tolerance
◇	614	0.30mm	Plated	
☆	60	0.70mm	Plated	
▣	40	1.00mm	Plated	
✧	3	1.10mm	Non-Plated	
◇	8	1.55mm	Plated	
○	8	1.75mm	Plated	
▽	4	2.30mm	Non-Plated	
□	4	4.09mm	Non-Plated	
	741 Total			

A


B

C


D

E


Top Layer (Scale 1:1)

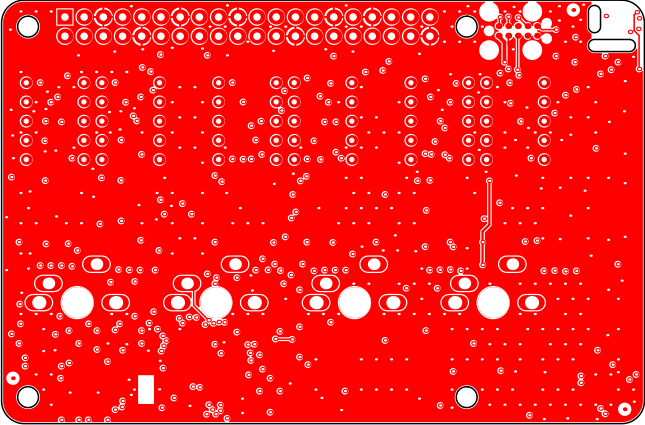


Layer 2 (Scale 1:1)

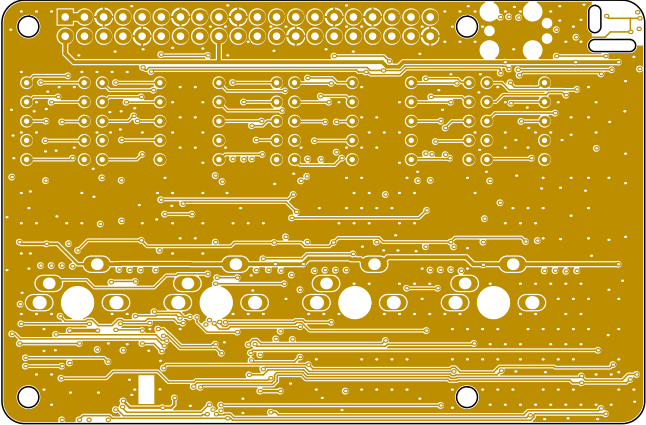

Layer 3 (Scale 1:1)

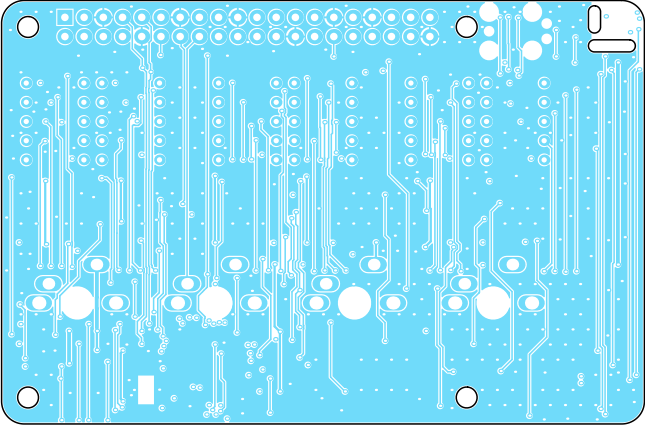

Bottom Layer (Scale 1:1)

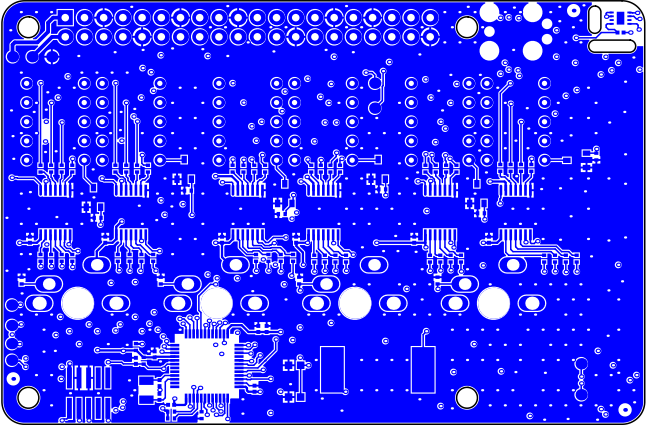

A


B

C


D

E


Top Overlay (Scale 3:2)

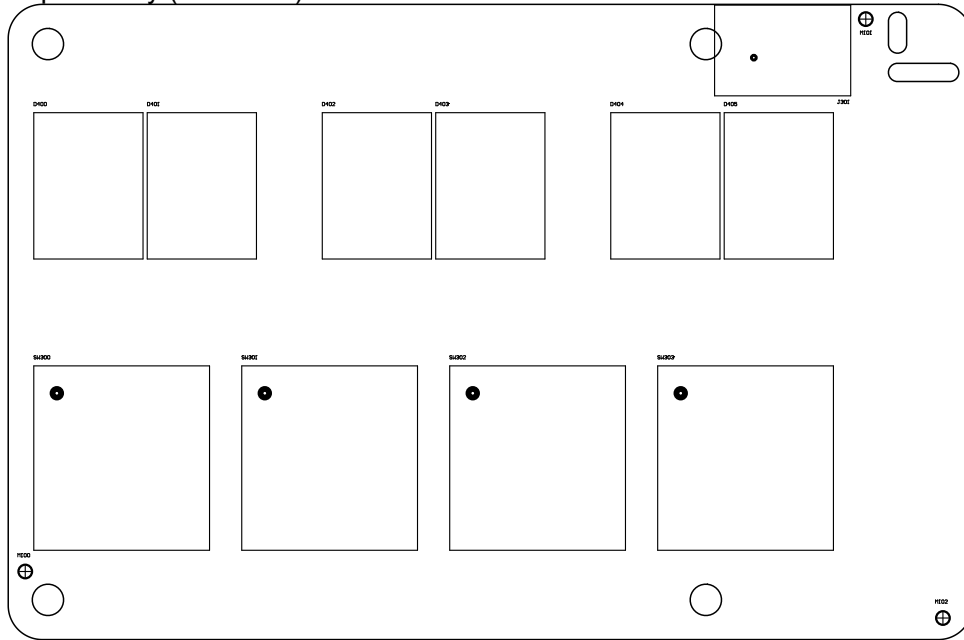


Bottom Overlay (Scale 3:2)

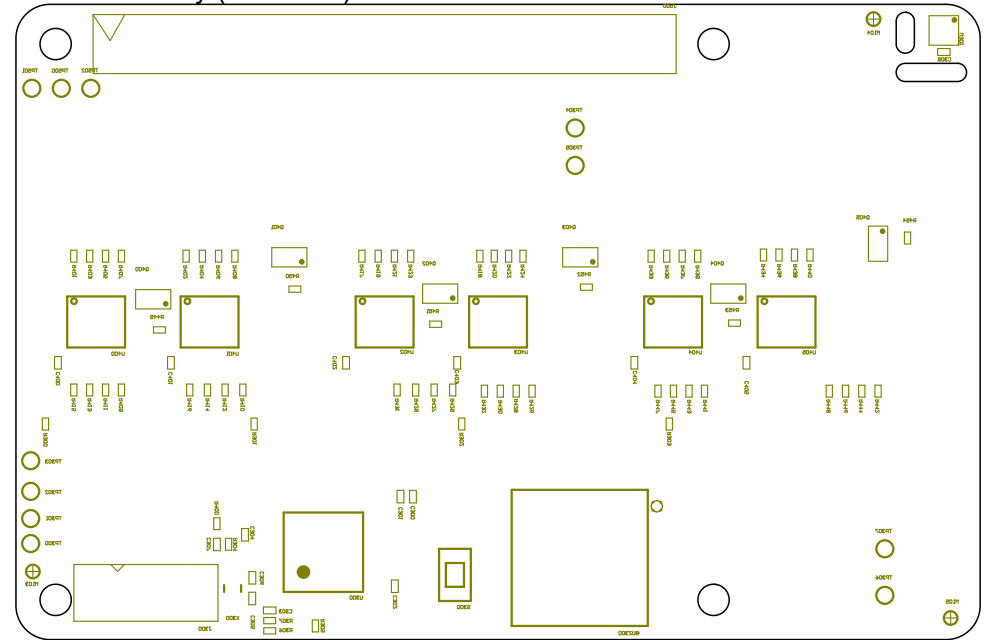


Realistic View

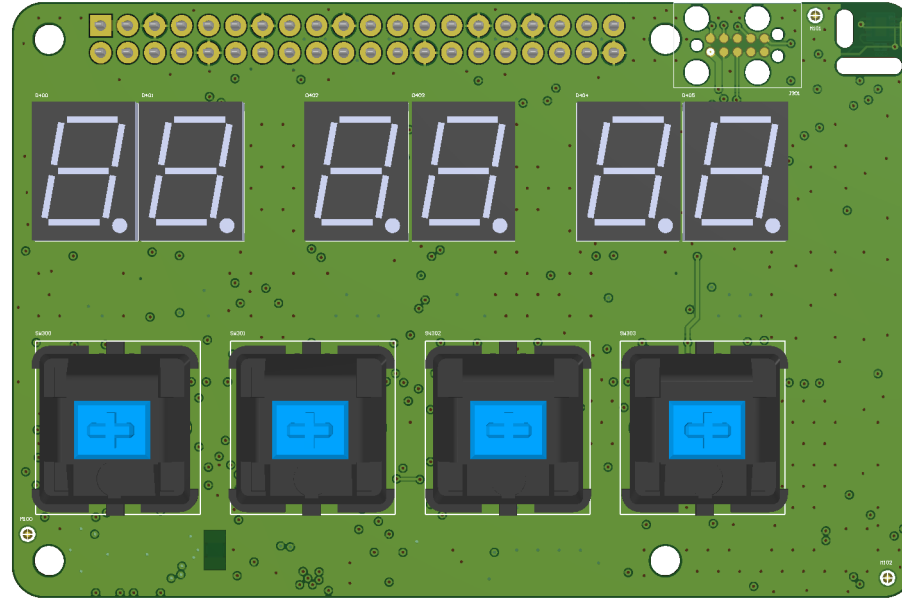

Realistic View

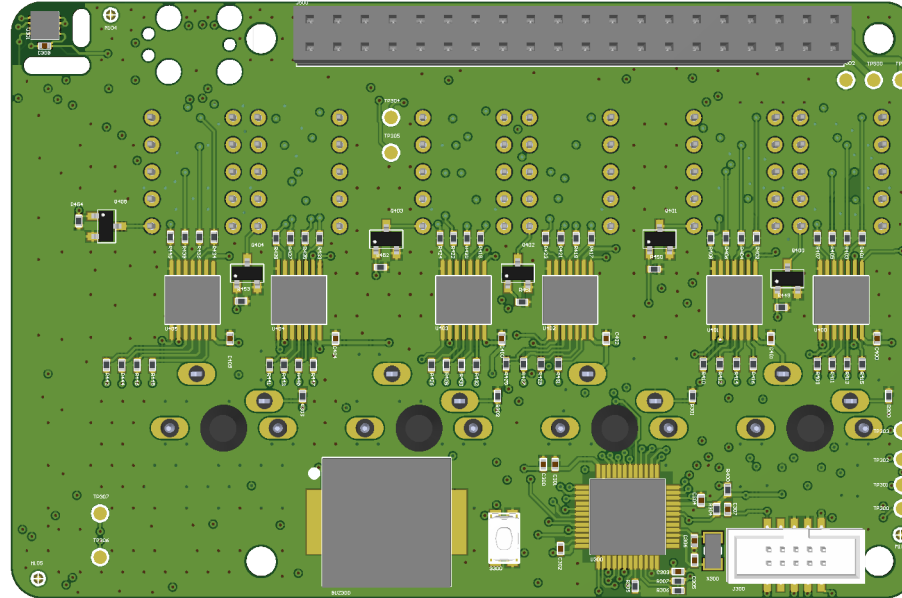

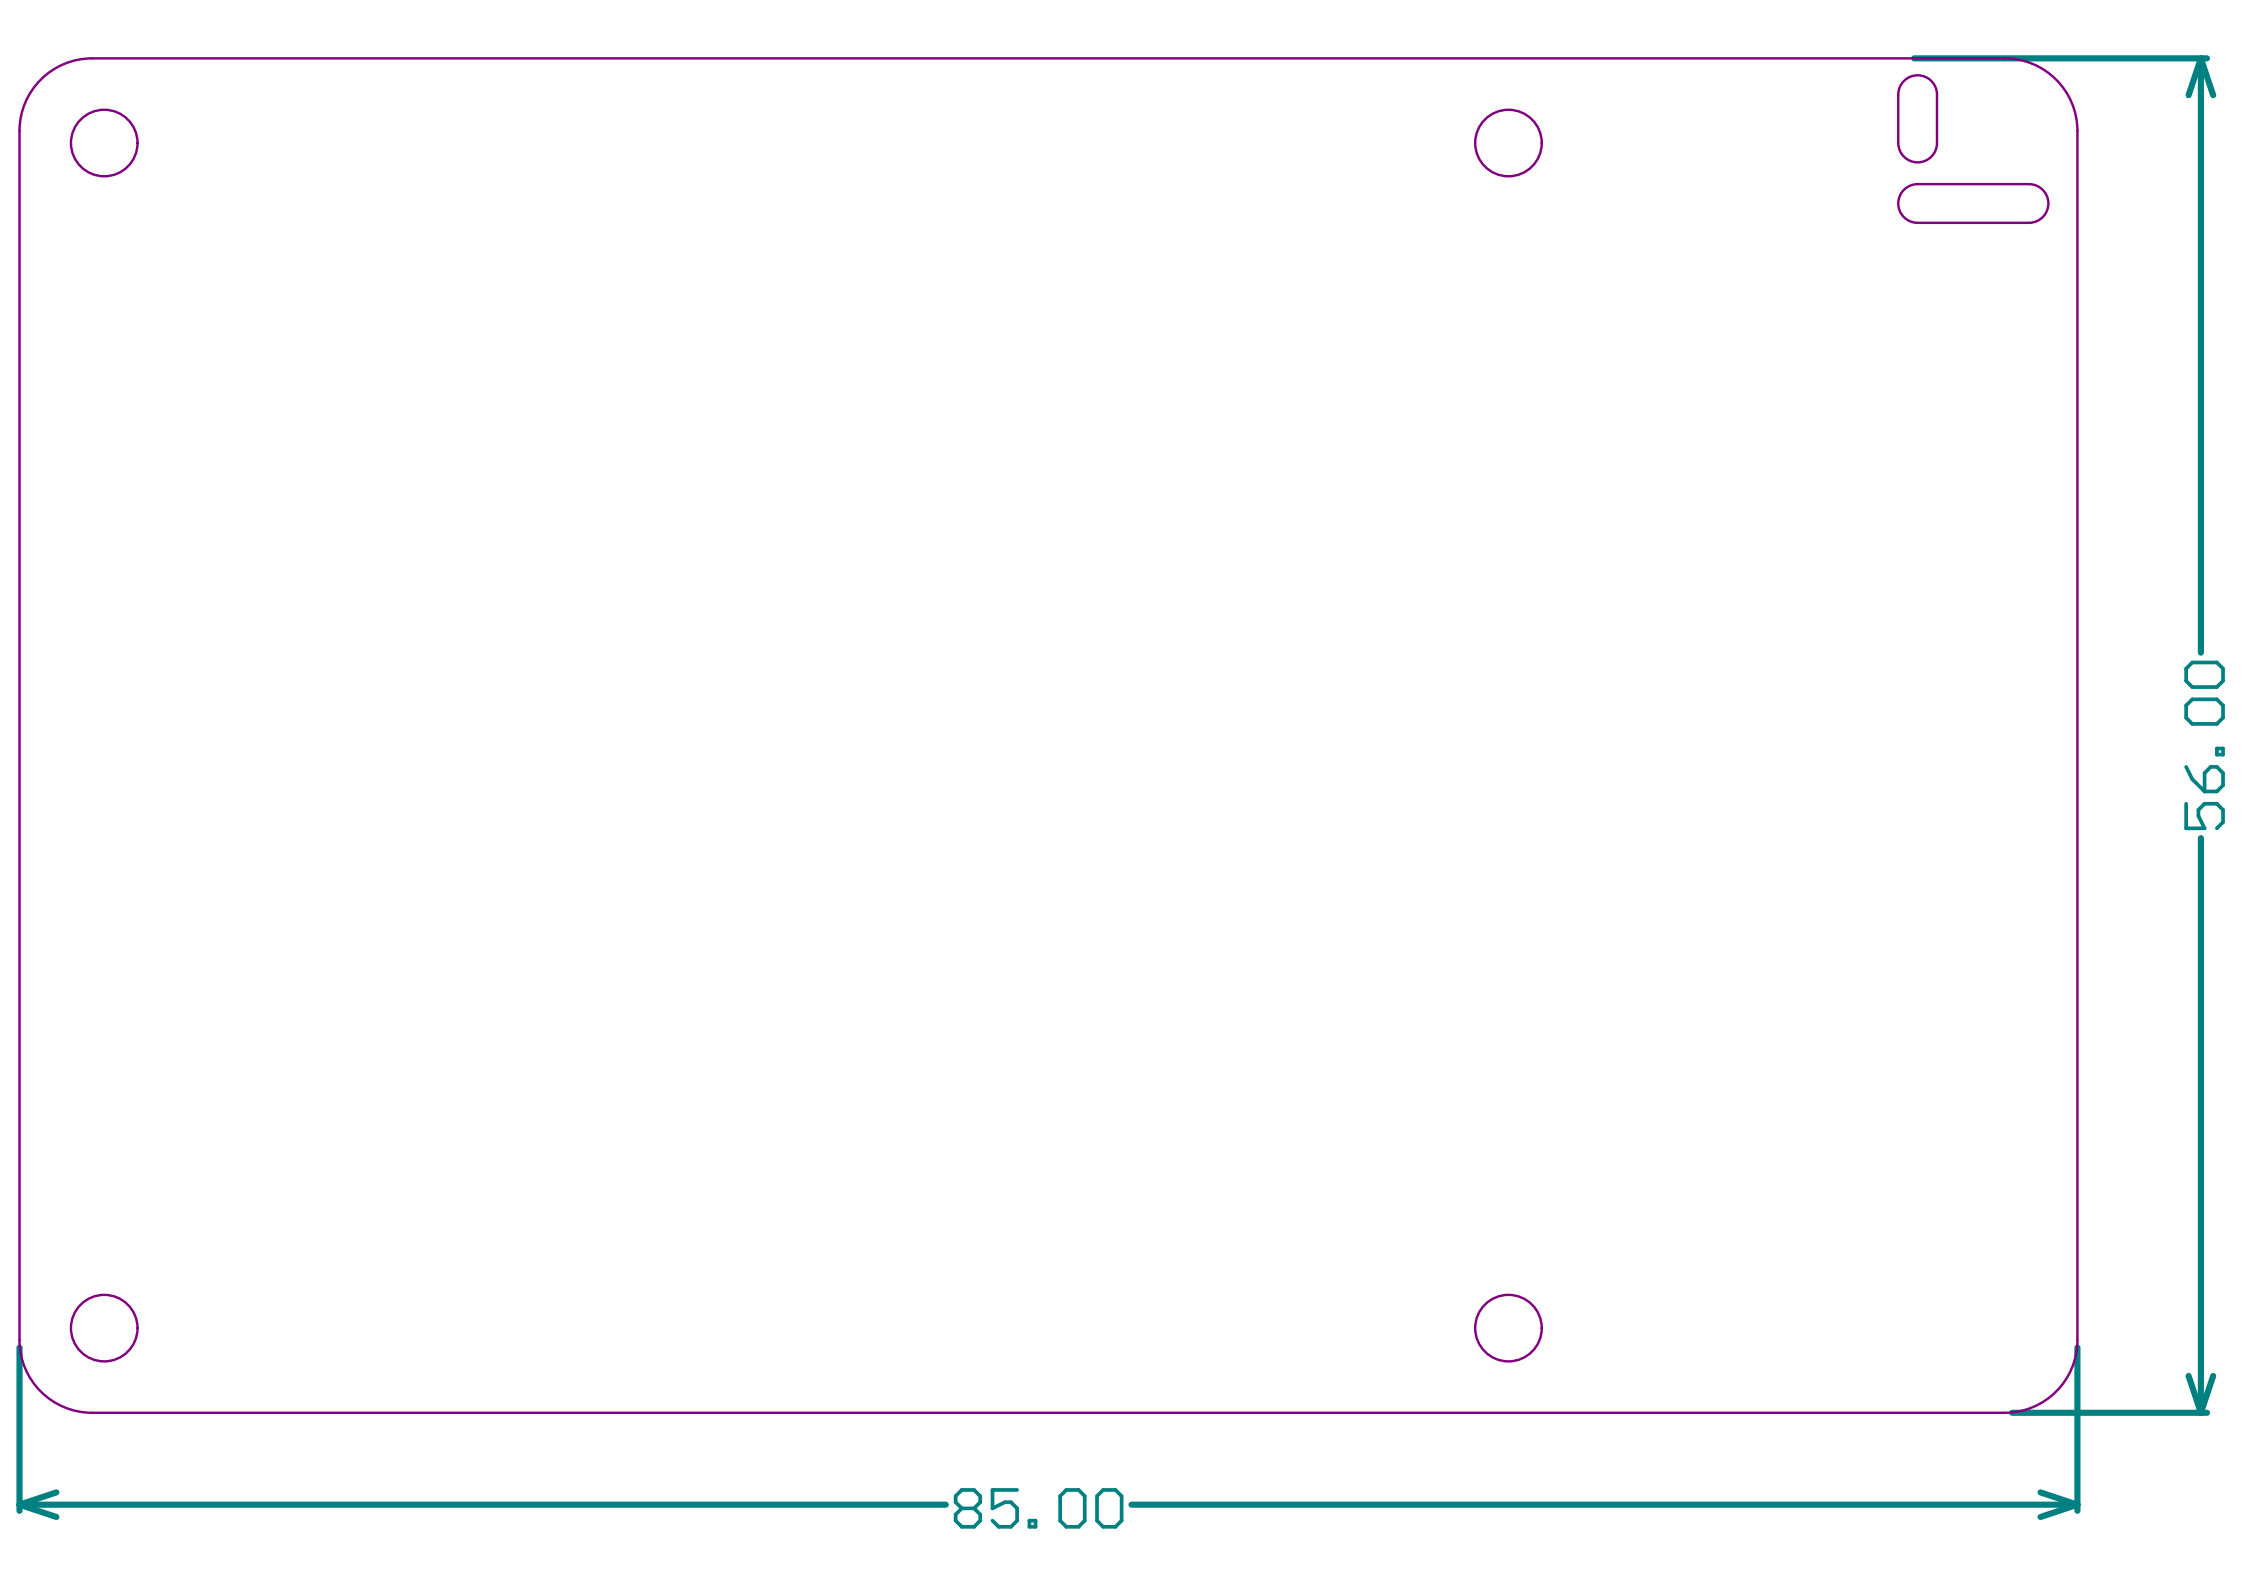



D400

D401





D402

D403

D404

D405

J301


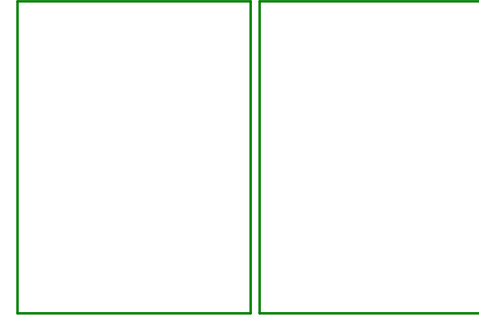
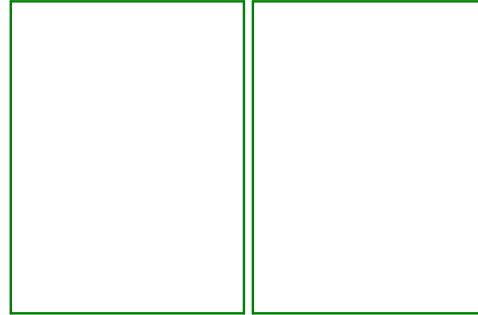
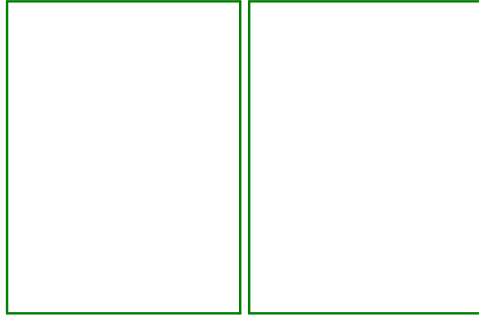


SH300

SH301

SH302

SH303

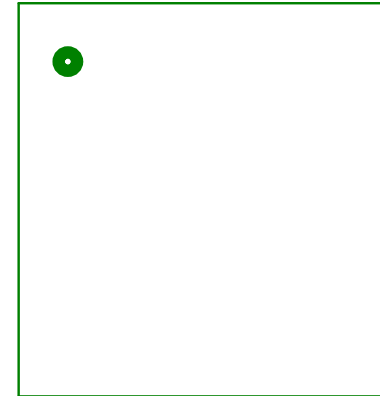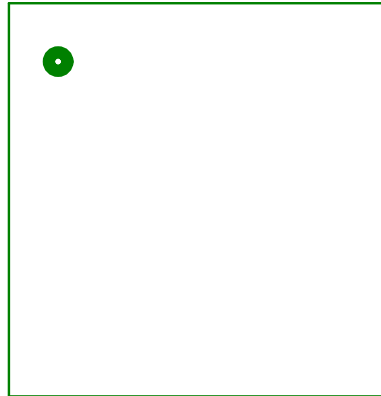

M100



