



shield clips


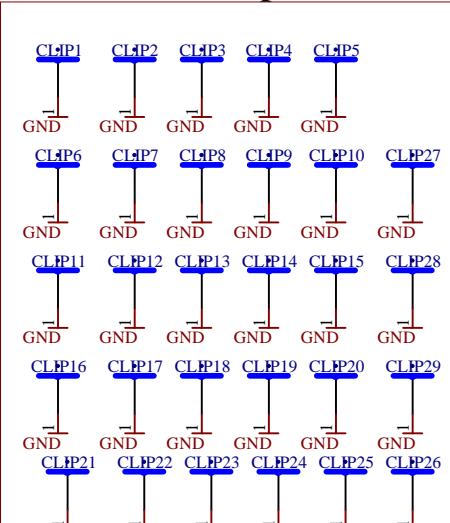


Ext clock input

Clock from Kasli

Output SMAs

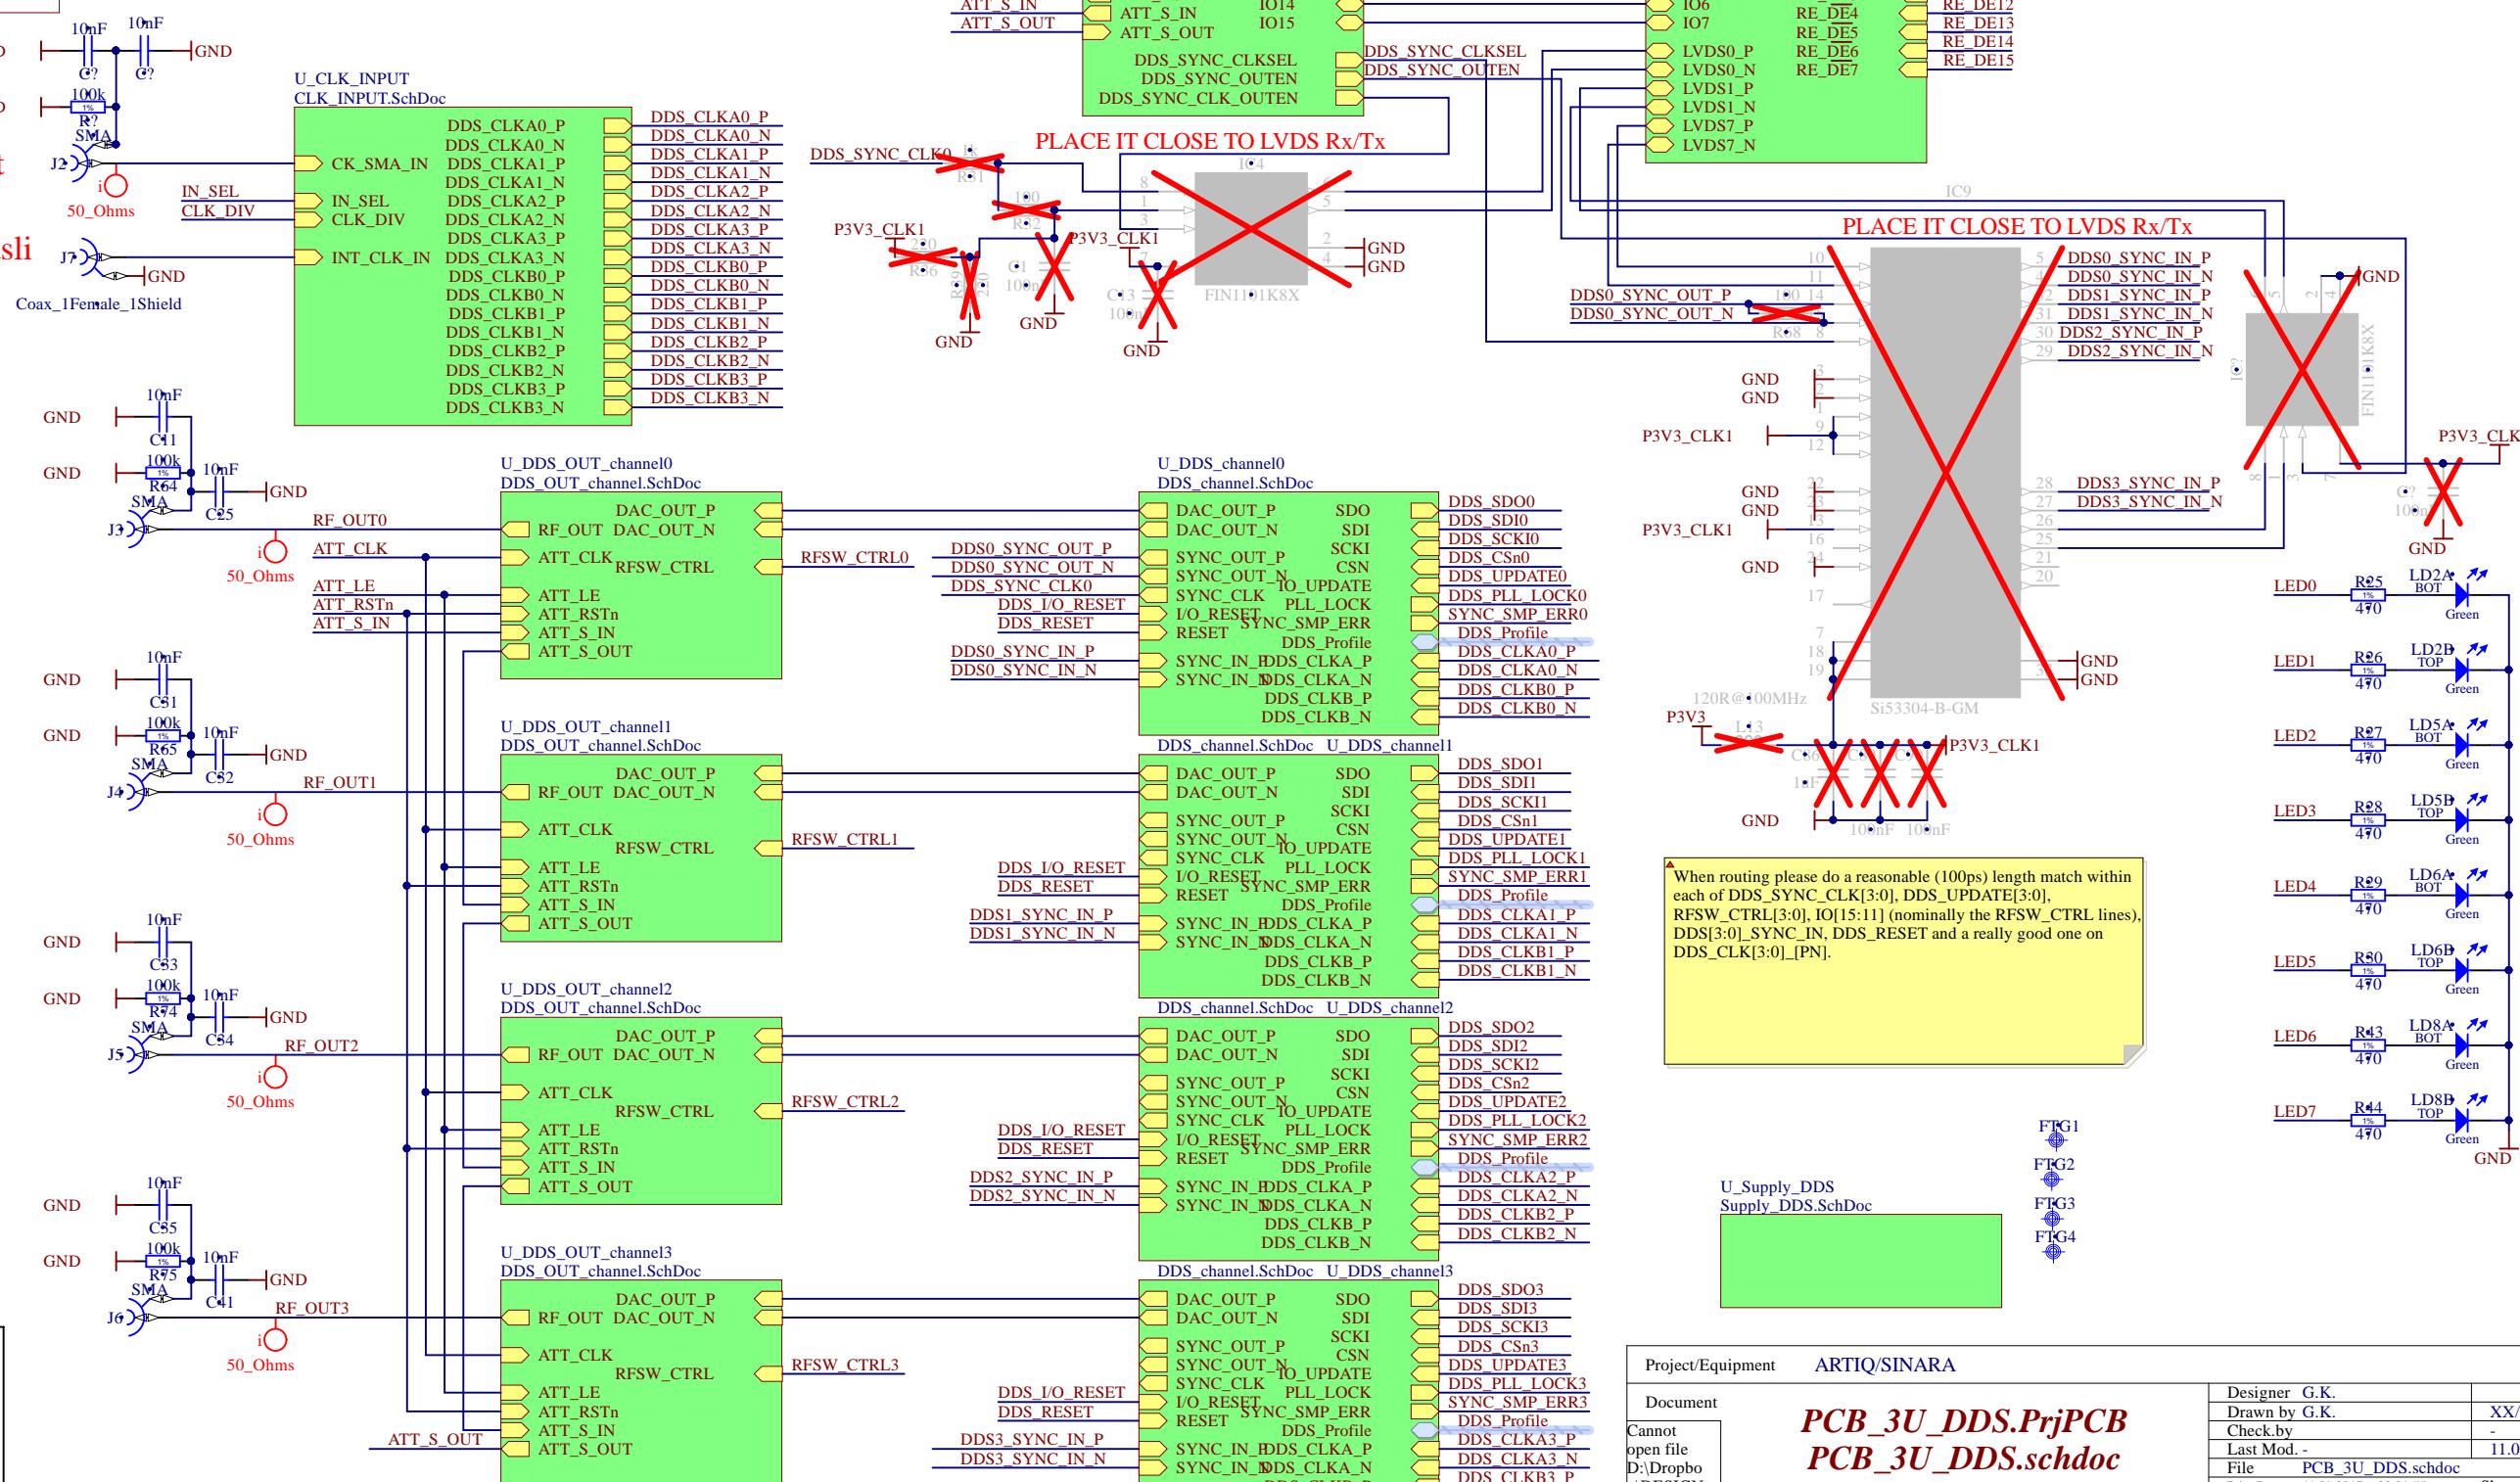


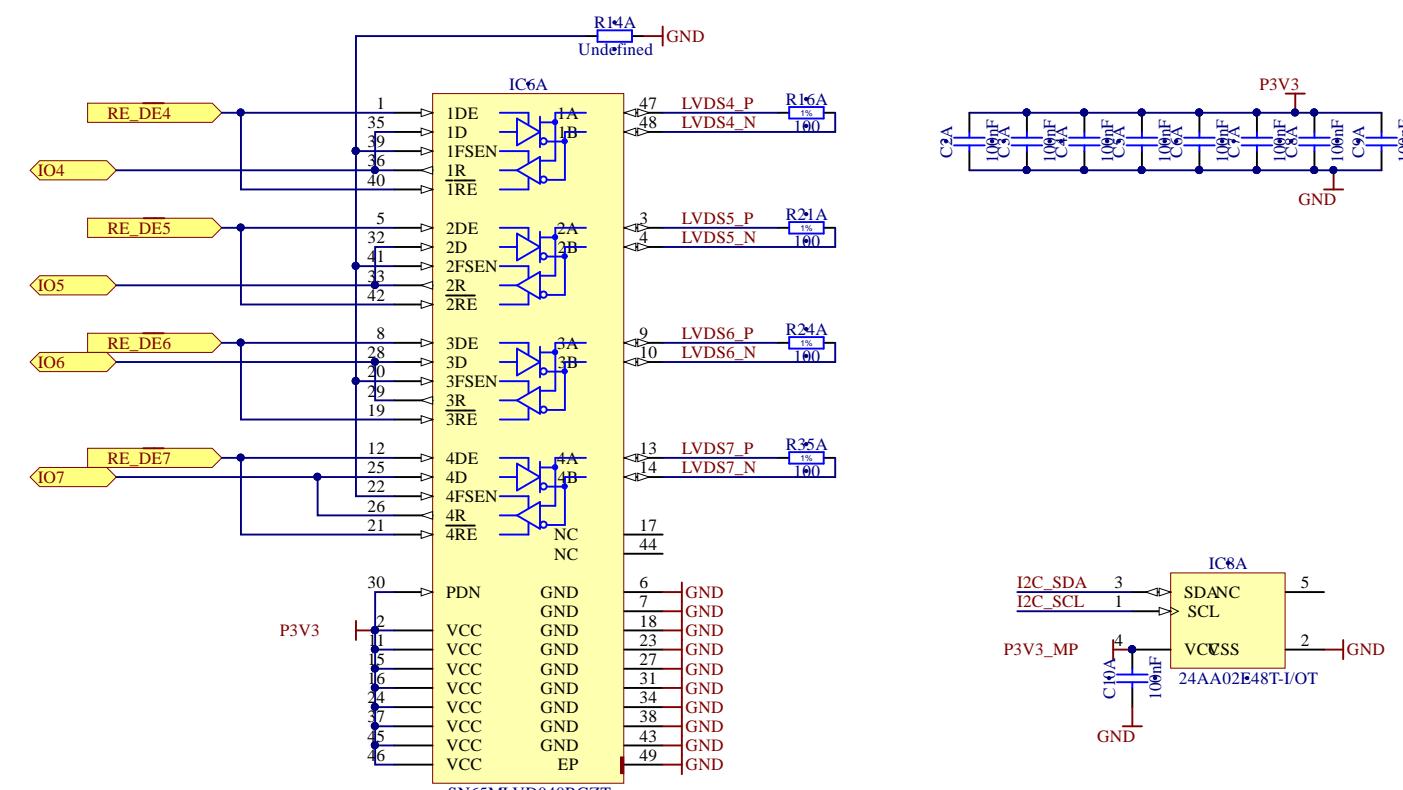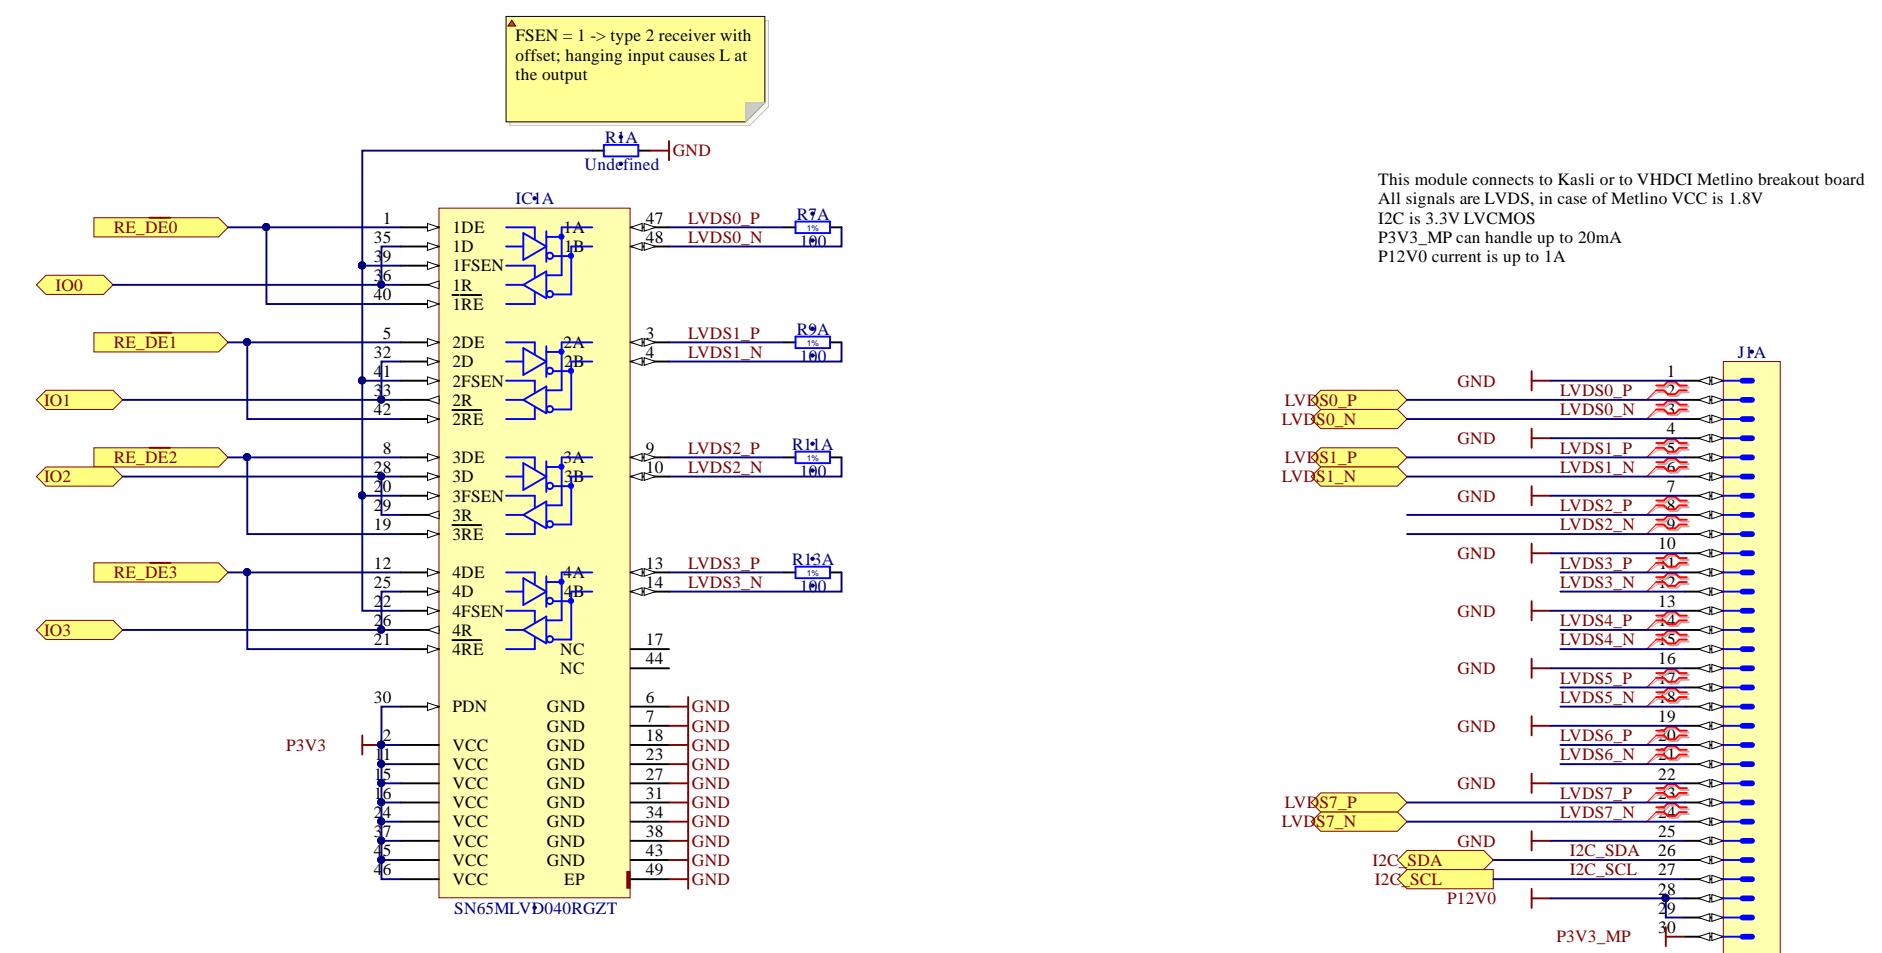




Copyright WUT 2017
This documentation describes Open Hardware and is licensed under the CERN OHL v.1. You may redistribute and modify this documentation under the terms of the CERN OHL v.1.1.
(<http://ohwr.org/CERNOHL>) This documentation is distributed WITHOUT ANY EXPRESS OR IMPLIED WARRANTY, INCLUDING MERCHANTABILITY, SATISFACTORY QUALITY AND FITNESS FOR A PARTICULAR PURPOSE. Please see the CERN OHL v.1 for applicable conditions.

Project/Equipment ARTIQ/SINARA
Document PCB_3U_DDS.PjPCB
Cannot open file D:\Dropbox\DESIGN\SiMTCA projects\SI
Drawn by G.K. Drawn by G.K. XX/XX/XXXX
Check by -
Last Mod. - 11.09.2017
File LVDS_IFC_DDS.SchDoc
Print Date 11.09.2017 23:01:56 Sheet 2 of 7
Warsaw University of Technology ISE Nowowiejska 15/19
ARTIQ

Designer G.K. Drawn by G.K. XX/XX/XXXX
Drawn by G.K. Drawn by G.K. XX/XX/XXXX
Check by -
Last Mod. - 11.09.2017
File LVDS_IFC_DDS.SchDoc
Print Date 11.09.2017 23:01:56 Sheet 2 of 7
Size A3 Rev -

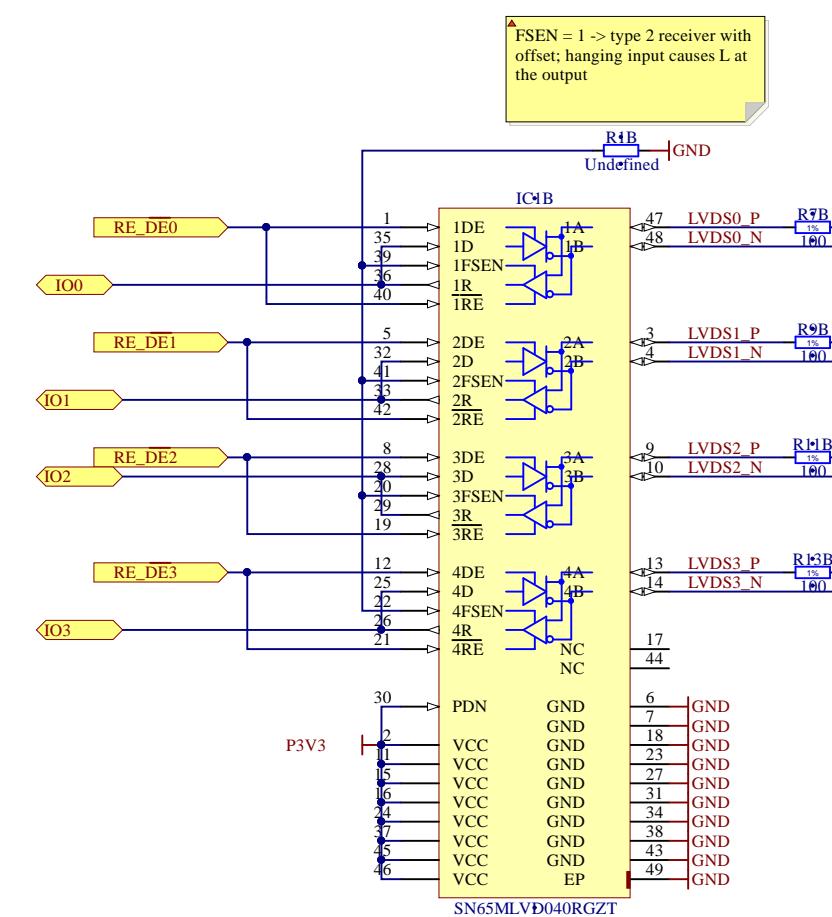

This module connects to Kasli or to VHDCI Metlino breakout board
All signals are LVDS, in case of Metlino VCC is 1.8V
I2C is 3.3V LVCMOS
P3V3_MP can handle up to 20mA
P12V0 current is up to 1A

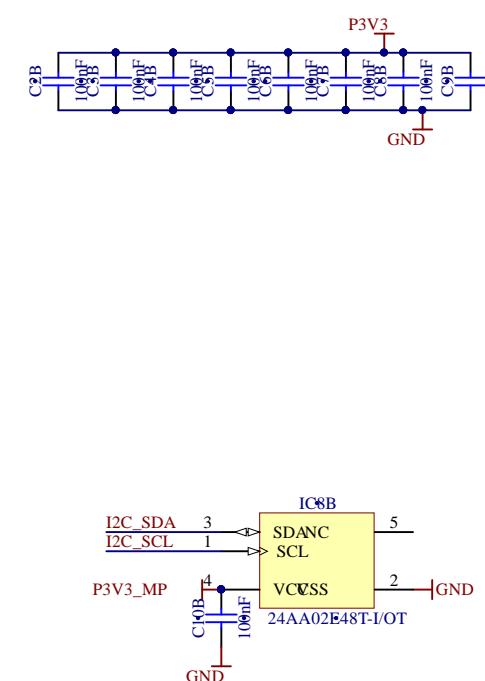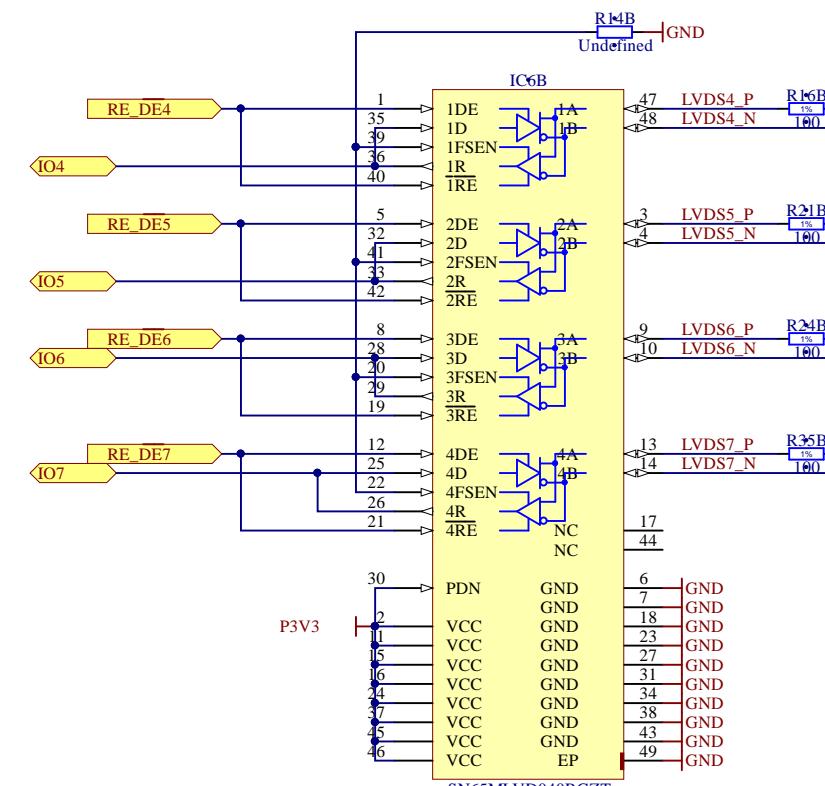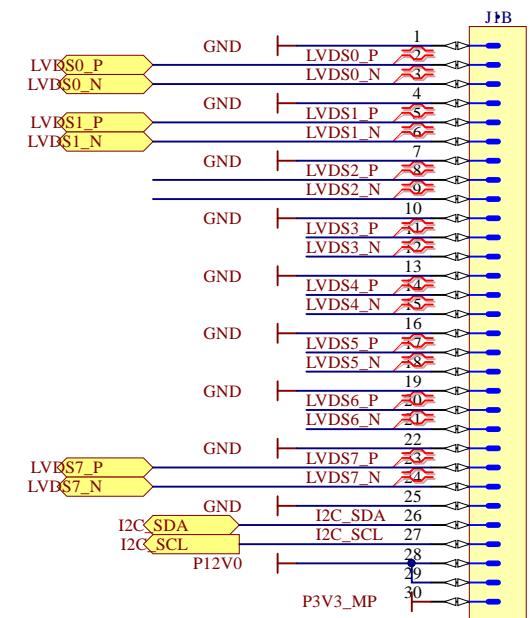


Copyright WUT 2017
This documentation describes Open Hardware and is licensed under the CERN OHL v.1. You may redistribute and modify this documentation under the terms of the CERN OHL v.1.1.
(<http://ohwr.org/CERNOHL>) This documentation is distributed WITHOUT ANY EXPRESS OR IMPLIED WARRANTY, INCLUDING MERCHANTABILITY, SATISFACTORY QUALITY AND FITNESS FOR A PARTICULAR PURPOSE. Please see the CERN OHL v.1 for applicable conditions.

Project/Equipment **ARTIQ/SINARA**

Document
Cannot open file D:\Dropbox\DESIGN\SMTCA projects\SI

PCB_3U_DDS.PjPCB
LVDS_IFC_DDS.SchDoc


Designer G.K.	Drawn by G.K.	XX/XX/XXXX
Check by -	-	-
Last Mod. -	11.09.2017	
File LVDS_IFC_DDS.SchDoc		
Print Date 11.09.2017 23:01:56		Sheet 2 of 7
Warsaw University of Technology ISE Nowowiejska 15/19		Size A3 Rev -

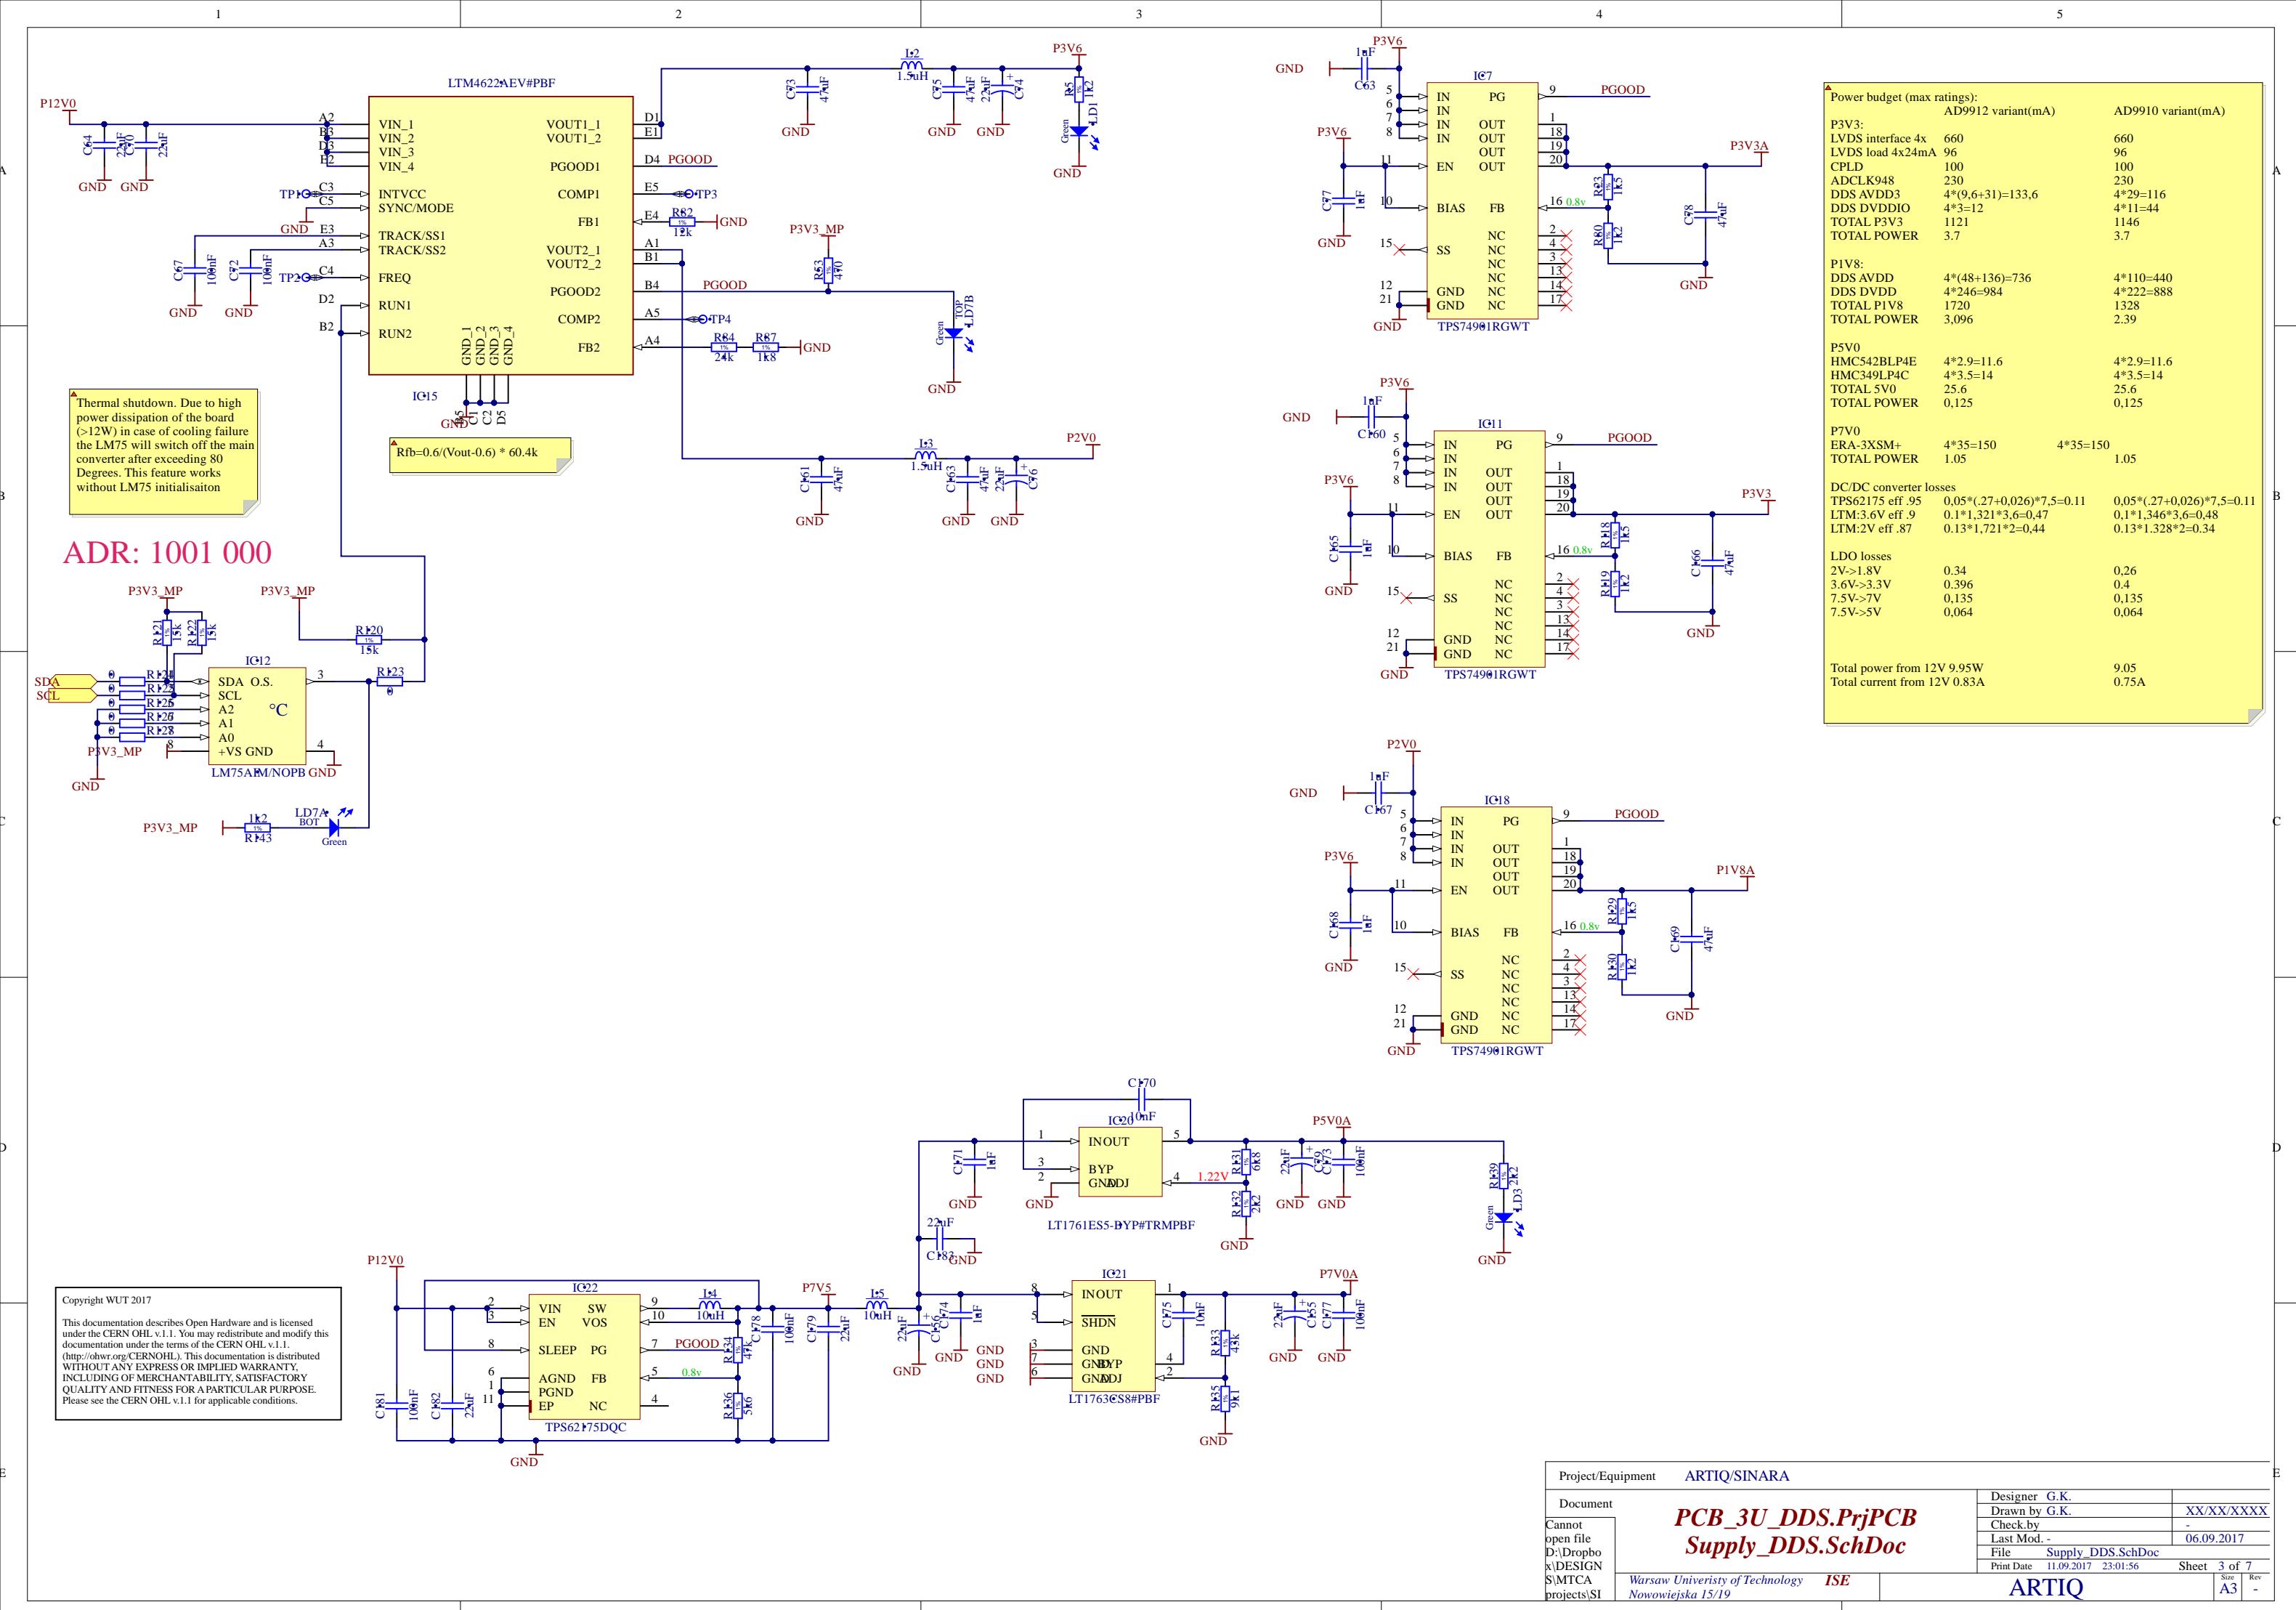


1 2 3 4 5

A A


One of Two RF filters can be used switchable by the two jumpers (R57/59 and R58/C28)
for jumper configuration see ADC_channel sheet
Populate Filter Components according to individual project design
For Custom Filter reference design and Possible configurations (as AWR MWO projects) are found in documentation folder

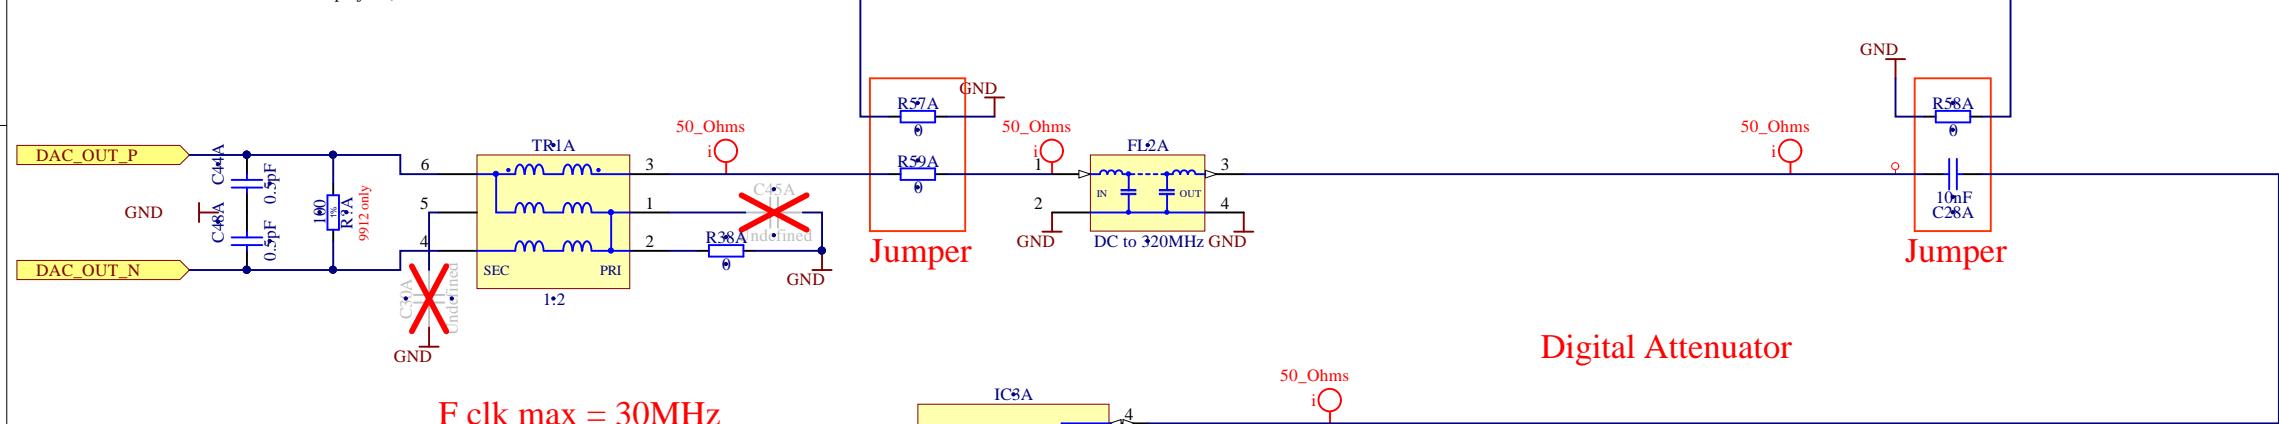

F clk max = 30MHz

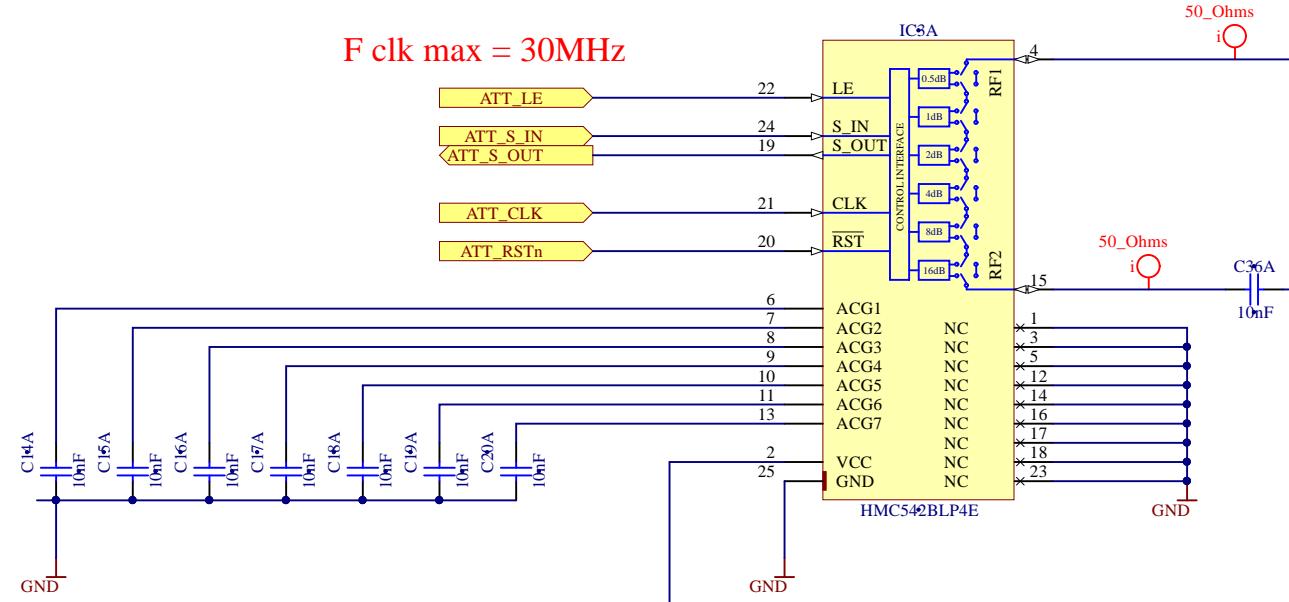


With about 1dBm out of the DDS, 0.5 dB insertion loss from the Balun, 0.5 dB from the lowpass, 1.5 dB from the attenuator, we need a 9dB T-pad to attenuate that before the ERA-3+ with 23 dB gain and P1dB of 13 dBm at our frequencies.

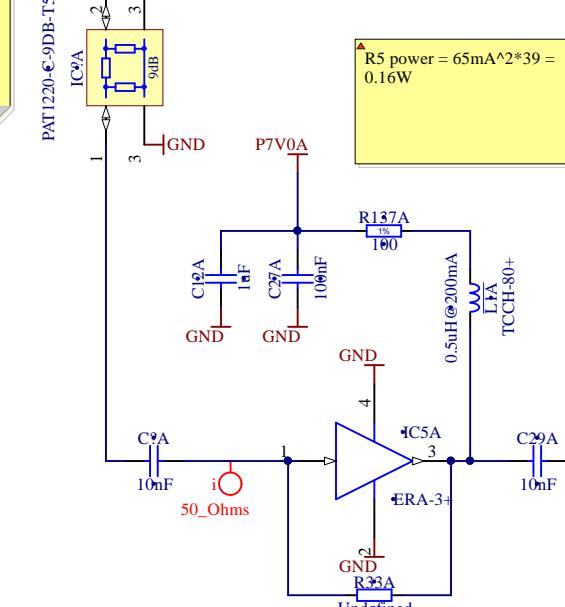

Amplifier
~23 dB gain and 13 dBm P1dB

SPDT switch

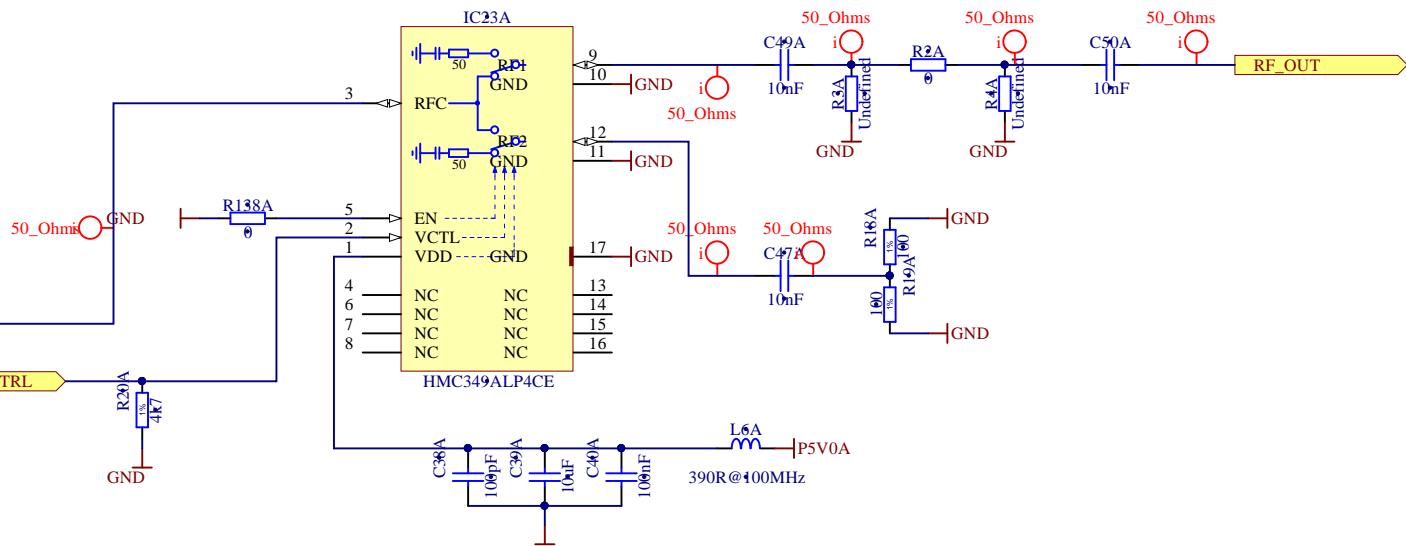

Copyright WUT 2017
This documentation describes Open Hardware and is licensed under the CERN OHL v.1.1. You may redistribute and modify this documentation under the terms of the CERN OHL v.1.1. (<http://ohwr.org/CERNOHL>). This documentation is distributed WITHOUT ANY EXPRESS OR IMPLIED WARRANTY, INCLUDING MERCHANTABILITY, SATISFACTORIES QUALITY AND FITNESS FOR A PARTICULAR PURPOSE. Please see the CERN OHL v.1.1 for applicable conditions.

Project/Equipment ARTIQ/SINARA


PCB_3U_DDS.PrjPCB
DDS_OUT_channel.SchDoc

Document	Designer G.K. Drawn by G.K. Check by - Last Mod. - File DDS_OUT_channel.SchDoc Print Date 11.09.2017 23:01:57	XX/XX/XXXX
Cannot open file D:\Dropbox\DESIGN\SMTCA projects\SI		
	Warsaw University of Technology ISE Nowowiejska 15/19	
	Sheet 4 of 7	Size A3 Rev -

1 2 3 4 5



A A

One of Two RF filters can be used switchable by the two jumpers (R57/59 and R58/C28)
for jumper configuration see ADC_channel sheet
Populate Filter Components according to individual project design
For Custom Filter reference design and Possible configurations (as AWR MWO projects) are found in documentation folder

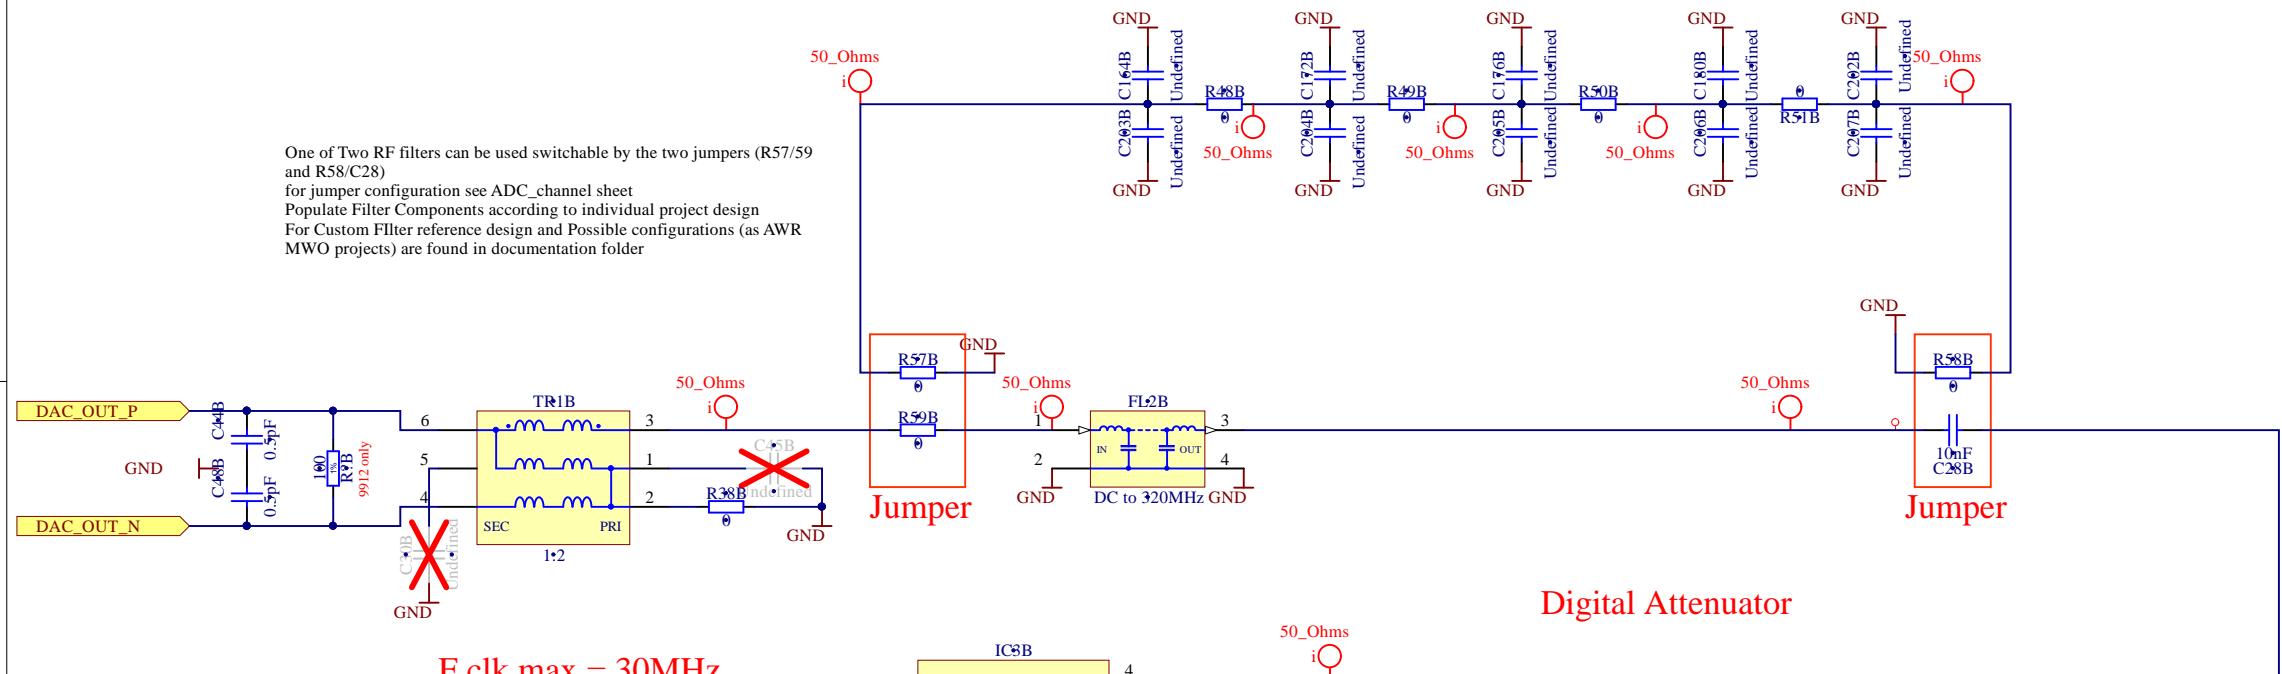


Digital Attenuator

F clk max = 30MHz

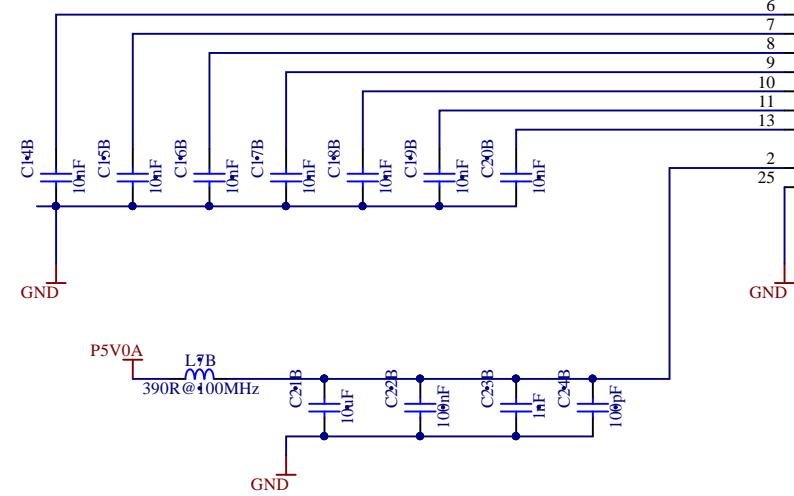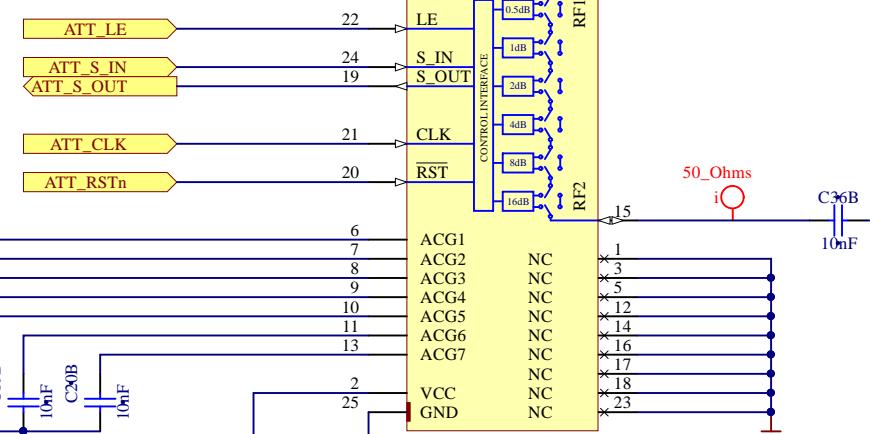


With about 1dBm out of the DDS, 0.5 dB insertion loss from the Balun, 0.5 dB from the lowpass, 1.5 dB from the attenuator, we need a 9dB T-pad to attenuate that before the ERA-3+ with 23 dB gain and P1dB of 13 dBm at our frequencies.

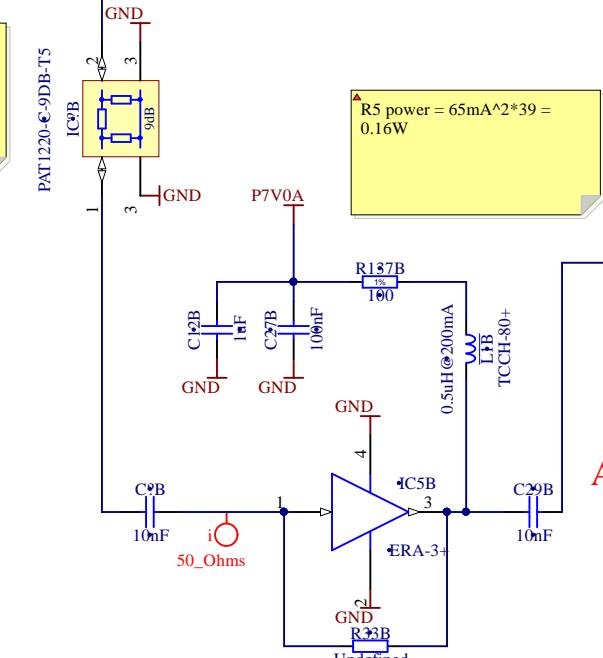

Amplifier
~23 dB gain and 13 dBm P1dB

SPDT switch

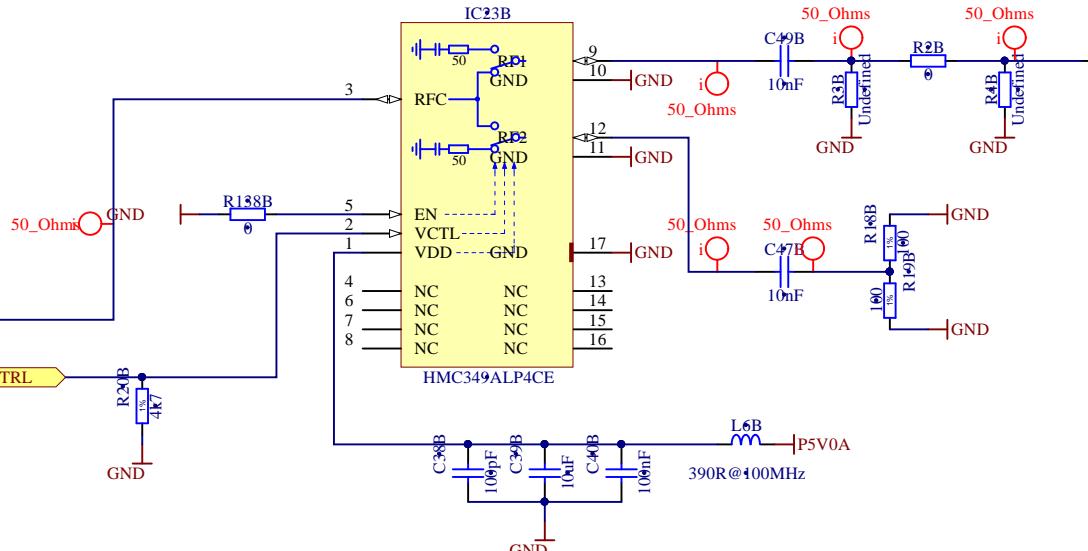

Copyright WUT 2017
This documentation describes Open Hardware and is licensed under the CERN OHL v.1.1. You may redistribute and modify this documentation under the terms of the CERN OHL v.1.1. (<http://ohwr.org/CERNOHL>). This documentation is distributed WITHOUT ANY EXPRESS OR IMPLIED WARRANTY, INCLUDING MERCHANTABILITY, SATISFACTORIE QUALITY AND FITNESS FOR A PARTICULAR PURPOSE. Please see the CERN OHL v.1 for applicable conditions.

Project/Equipment ARTIQ/SINARA

PCB_3U_DDS.PrjPCB
DDS_OUT_channel.SchDoc

Warsaw University of Technology ISE
Nowowiejska 15/19

Designer G.K.	Drawn by G.K.	XX/XX/XXXX
Check by -	-	-
Last Mod. -	11.09.2017	
File DDS_OUT_channel.SchDoc		
Print Date 11.09.2017 23:01:57		

Sheet 4 of 7


Size A3 Rev -

ARTIQ


1 2 3 4 5

A A


One of Two RF filters can be used switchable by the two jumpers (R57/59 and R58/C28)
for jumper configuration see ADC_channel sheet
Populate Filter Components according to individual project design
For Custom Filter reference design and Possible configurations (as AWR MWO projects) are found in documentation folder

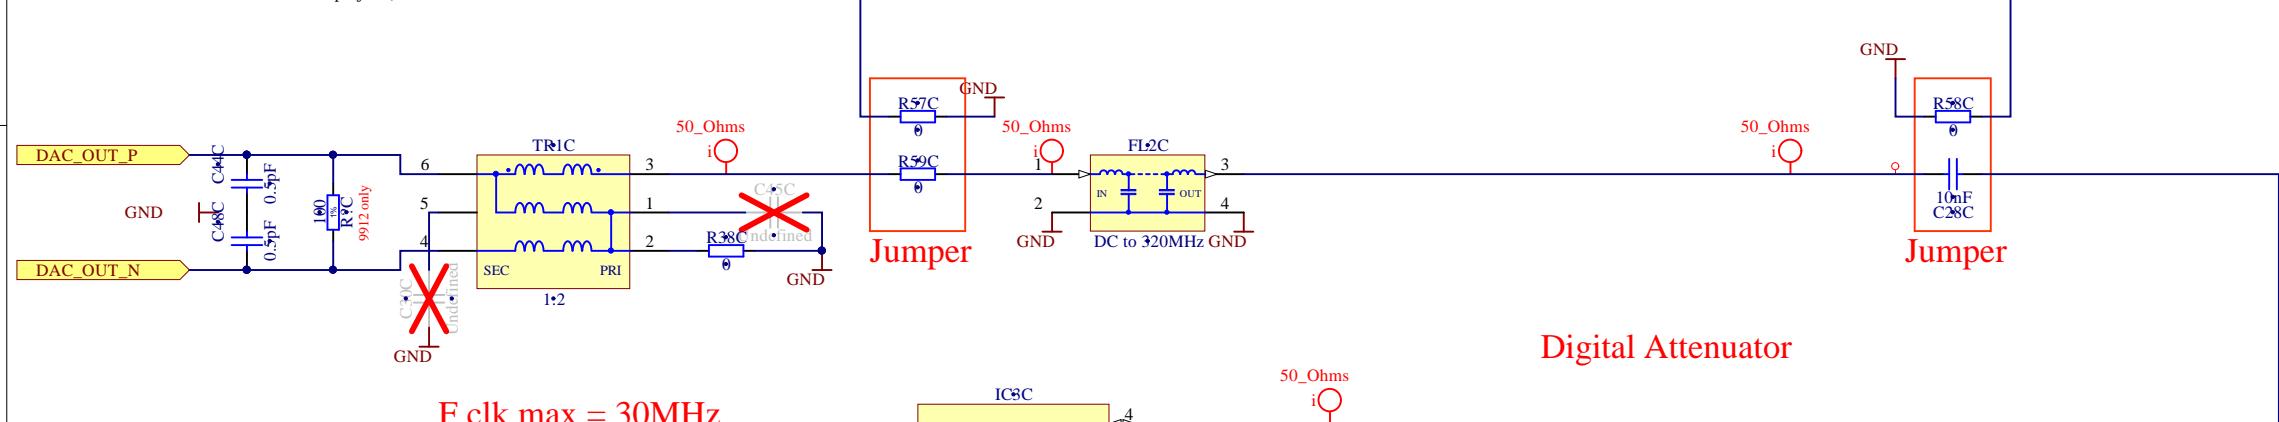

Digital Attenuator

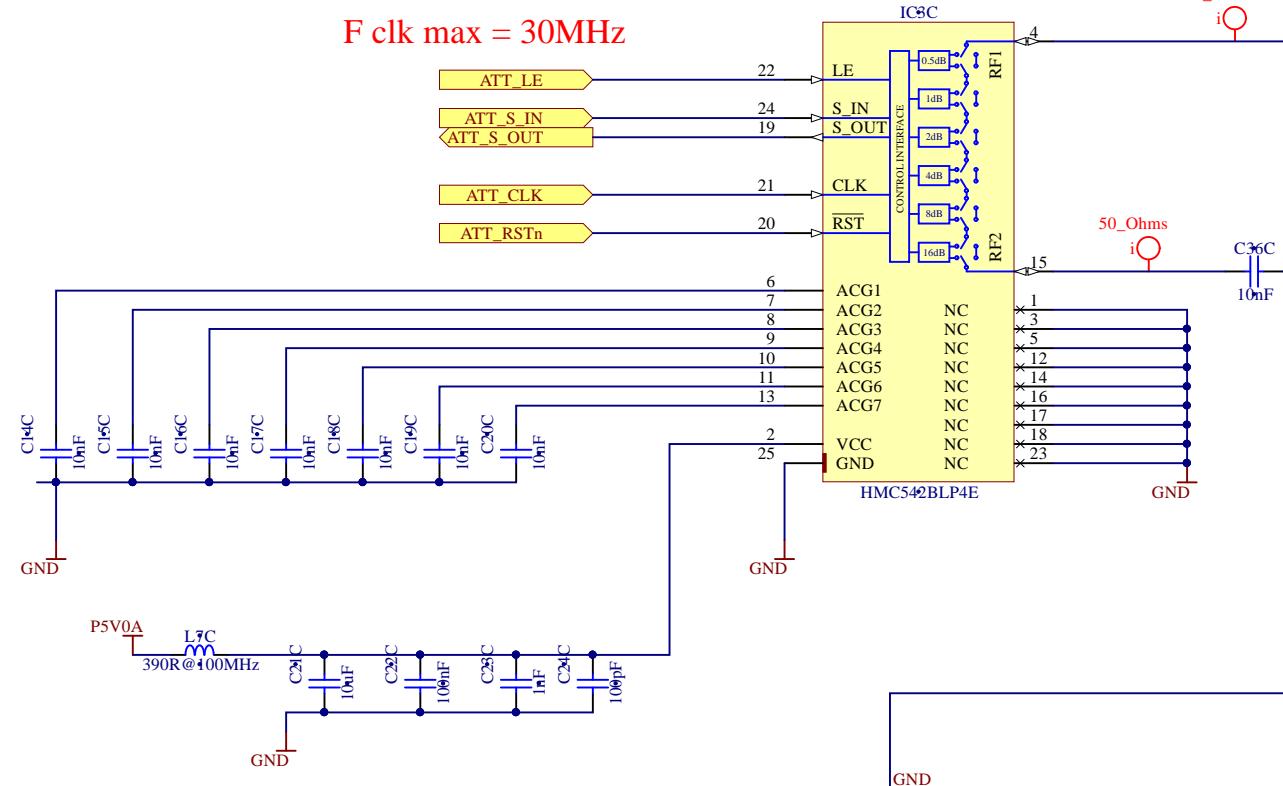


F clk max = 30MHz

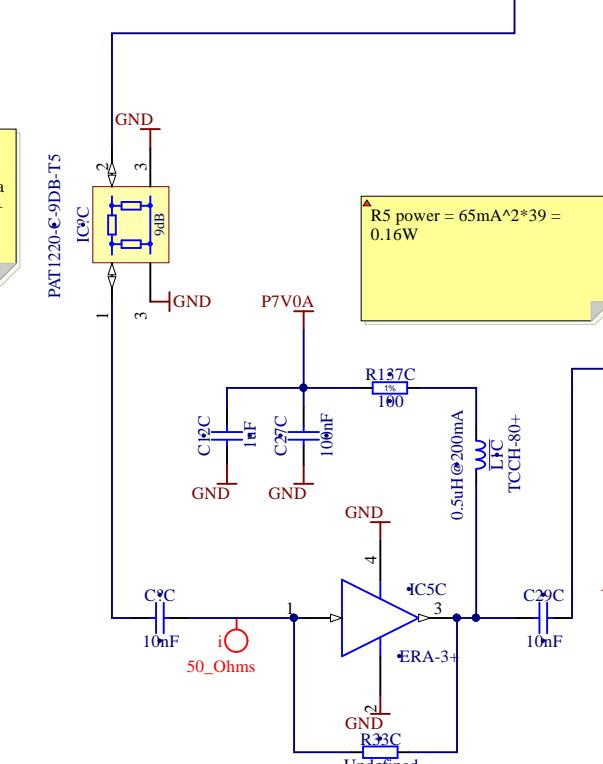

Amplifier
~23 dB gain and 13 dBm P1dB

SPDT switch

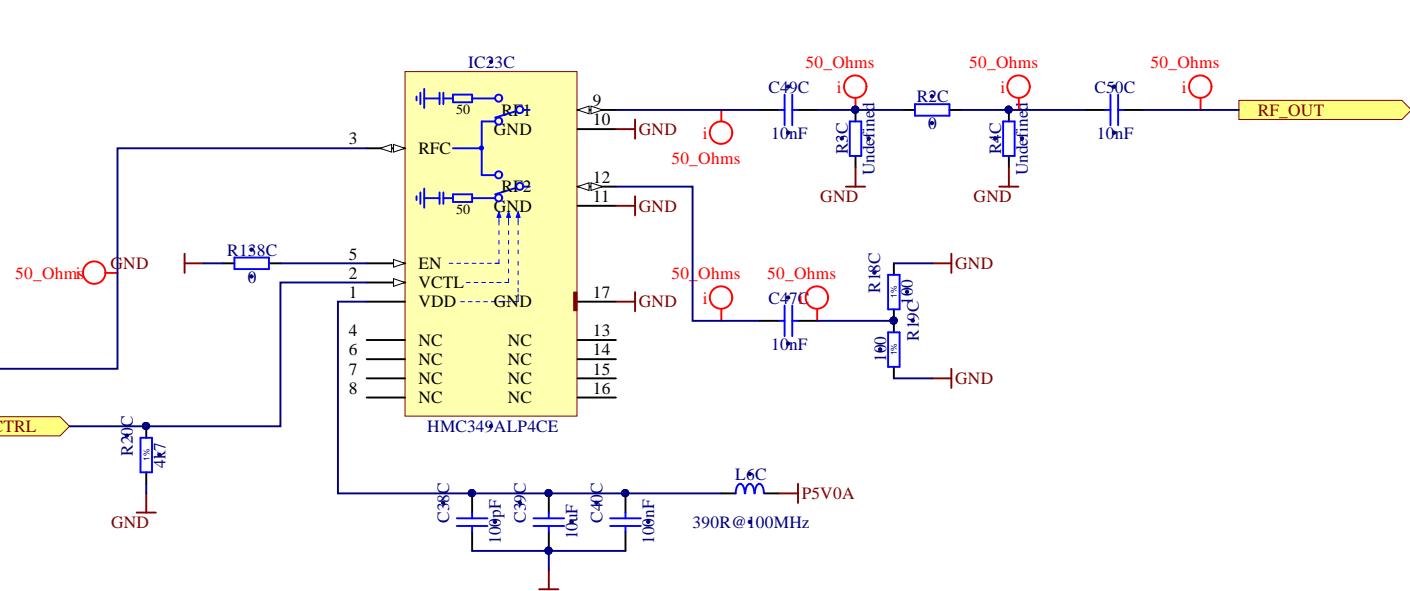

Copyright WUT 2017
This documentation describes Open Hardware and is licensed under the CERN OHL v.1.1. You may redistribute and modify this documentation under the terms of the CERN OHL v.1.1. (<http://ohwr.org/CERNOHL>). This documentation is distributed WITHOUT ANY EXPRESS OR IMPLIED WARRANTY, INCLUDING MERCHANTABILITY, SATISFACTORINESS, QUALITY AND FITNESS FOR A PARTICULAR PURPOSE. Please see the CERN OHL v.1 for applicable conditions.

Project/Equipment ARTIQ/SINARA

PCB_3U_DDS.PrjPCB
DDS_OUT_channel.SchDoc

Designer G.K.	Drawn by G.K.	XX/XX/XXXX
Check by -	-	-
Last Mod. -	11.09.2017	
File DDS_OUT_channel.SchDoc		
Print Date 11.09.2017 23:01:57		Sheet 4 of 7

Warsaw University of Technology ISE
Nowowiejska 15/19


ARTIQ

Size A3 Rev -

1 2 3 4 5


A A

One of Two RF filters can be used switchable by the two jumpers (R57/59 and R58/C28)
for jumper configuration see ADC_channel sheet
Populate Filter Components according to individual project design
For Custom Filter reference design and Possible configurations (as AWR MWO projects) are found in documentation folder

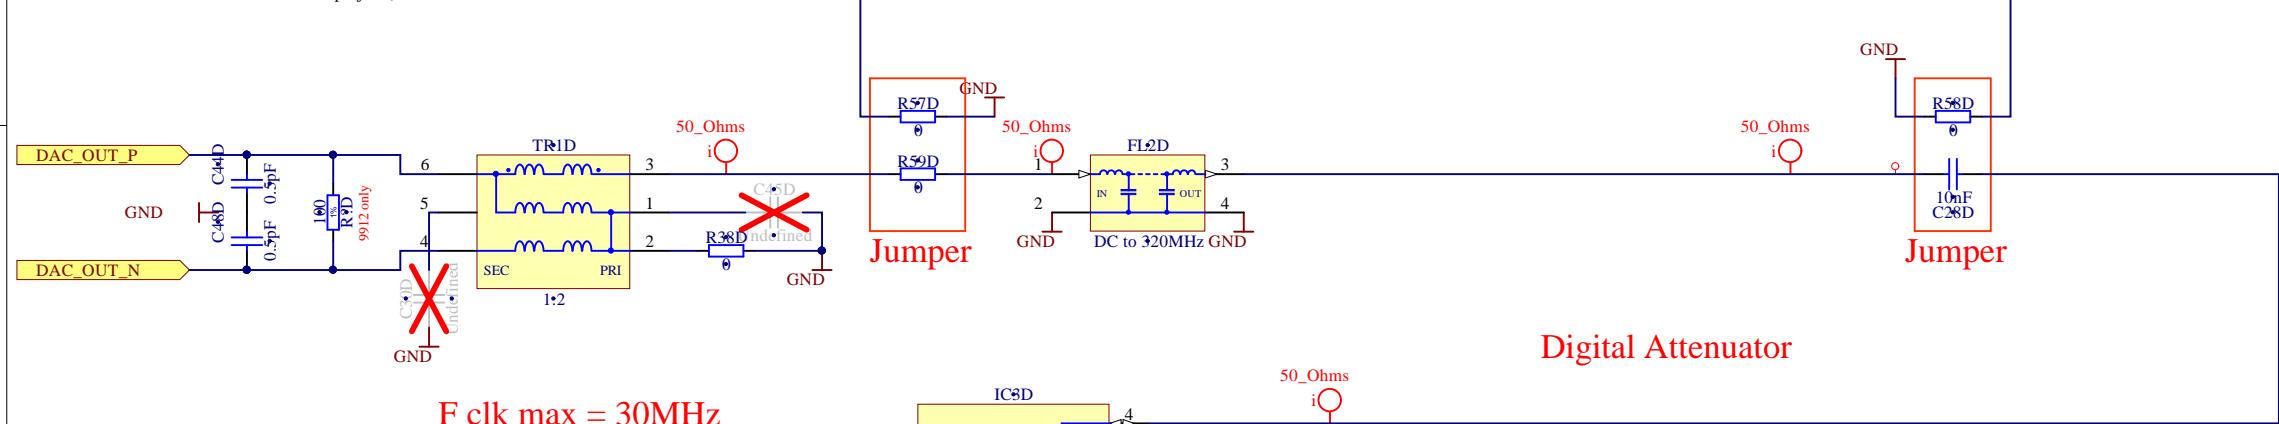


Digital Attenuator

F clk max = 30MHz

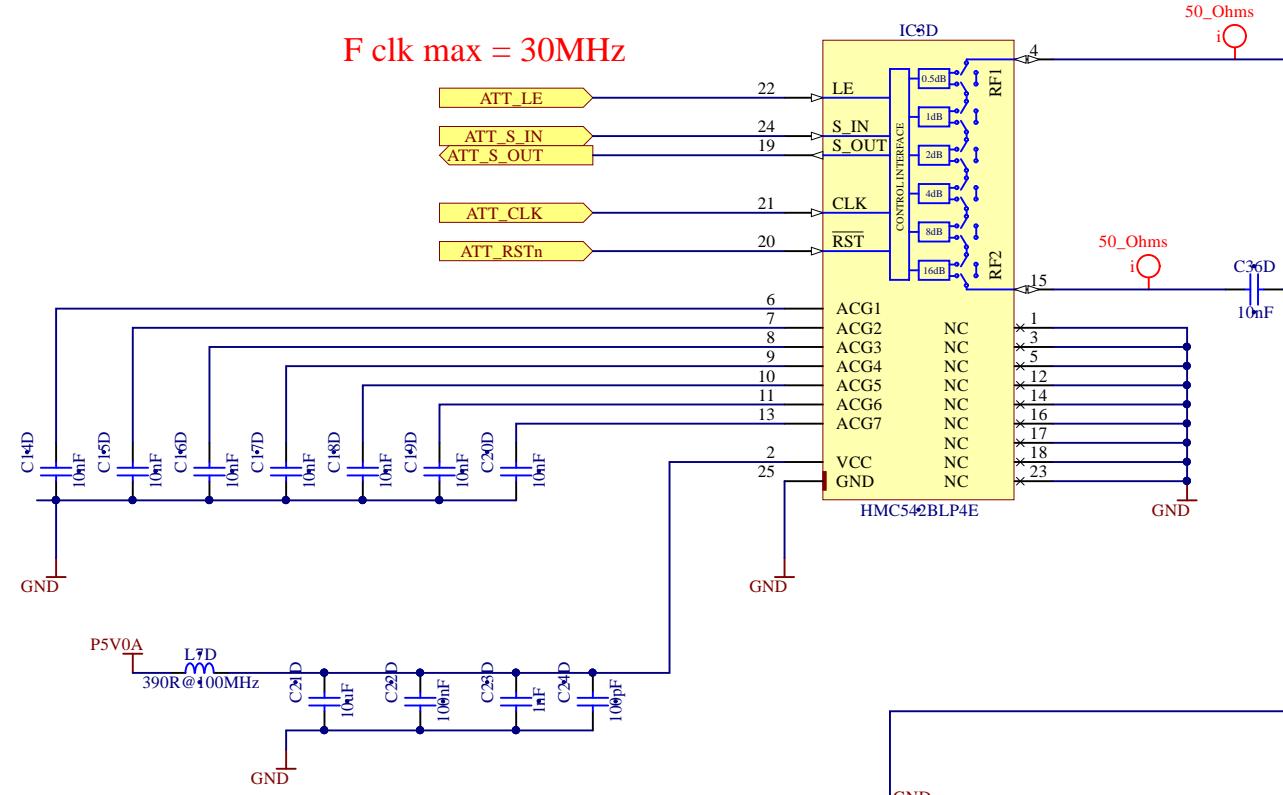


With about 1dBm out of the DDS, 0.5 dB insertion loss from the Balun, 0.5 dB from the lowpass, 1.5 dB from the attenuator, we need a 9dB T-pad to attenuate that before the ERA-3+ with 23 dB gain and P1dB of 13 dBm at our frequencies.

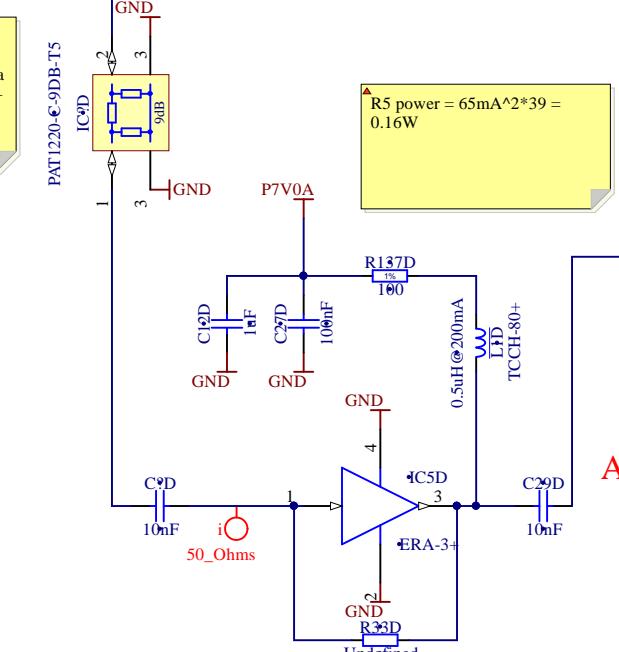

Amplifier ~23 dB gain and 13 dBm P1dB

SPDT switch

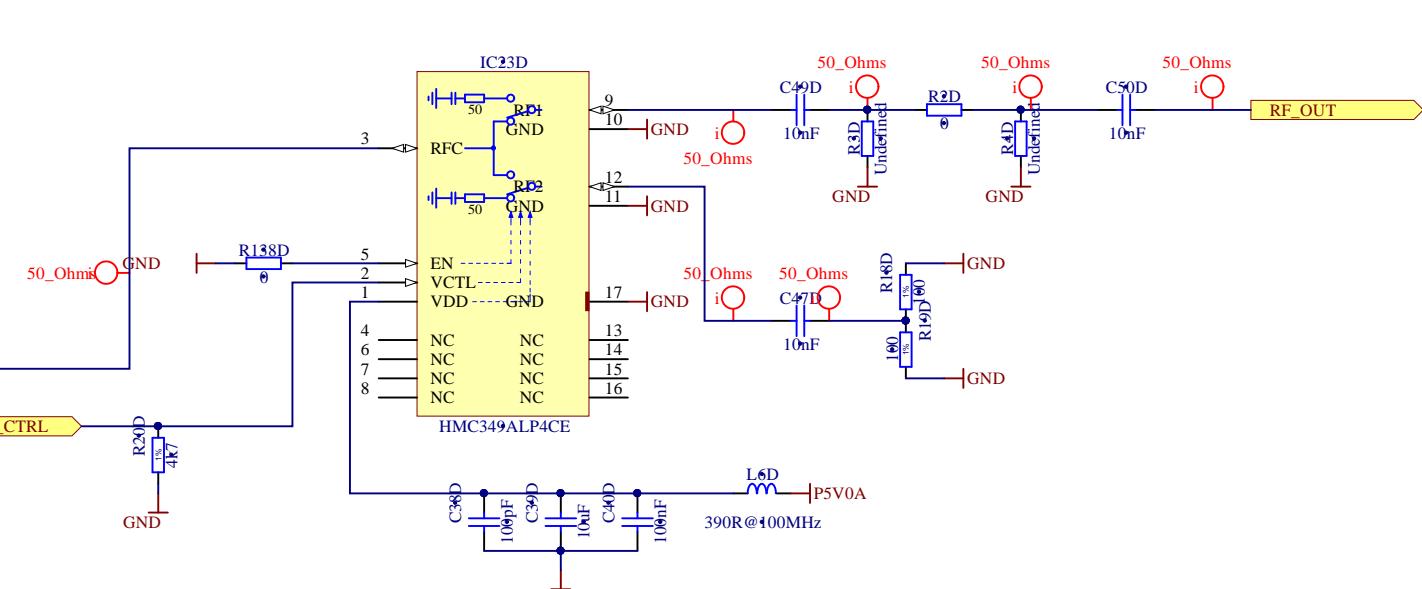

Copyright WUT 2017
This documentation describes Open Hardware and is licensed under the CERN OHL v.1.1. You may redistribute and modify this documentation under the terms of the CERN OHL v.1.1. (<http://ohwr.org/CERNOHL>). This documentation is distributed WITHOUT ANY EXPRESS OR IMPLIED WARRANTY, INCLUDING MERCHANTABILITY, SATISFACTORY QUALITY AND FITNESS FOR A PARTICULAR PURPOSE. Please see the CERN OHL v.1 for applicable conditions.

Project/Equipment ARTIQ/SINARA

**PCB_3U_DDS.PrjPCB
DDS_OUT_channel.SchDoc**

Designer G.K.	Drawn by G.K.	XX/XX/XXXX
Check by -	-	-
Last Mod. -	11.09.2017	
File DDS_OUT_channel.SchDoc		
Print Date 11.09.2017 23:01:58		
Sheet 4 of 7		

Warsaw University of Technology ISE
Nowowiejska 15/19

ARTIQ

Size A3 Rev -

NOT MOUNTED BY DEFAULT


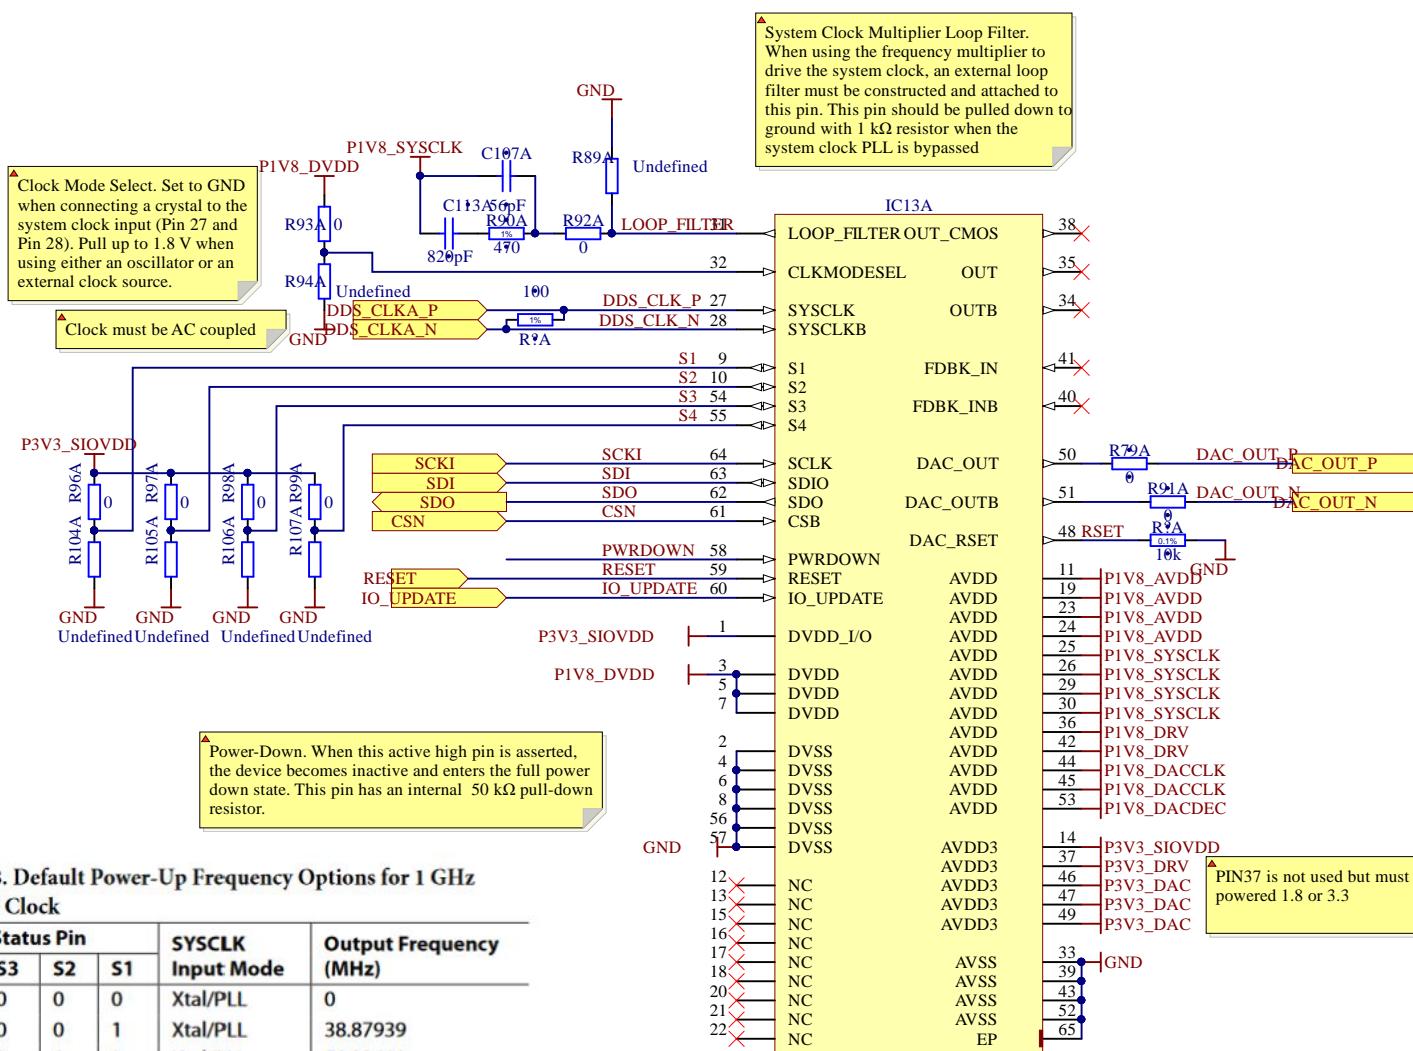


Table 8. Default Power-Up Frequency Options for 1 GHz System Clock

Status Pin				SYSCLK Input Mode	Output Frequency (MHz)
S4	S3	S2	S1		
0	0	0	0	Xtal/PLL	0
0	0	0	1	Xtal/PLL	38.87939
0	0	1	0	Xtal/PLL	51.83411
0	0	1	1	Xtal/PLL	61.43188
0	1	0	0	Xtal/PLL	77.75879
0	1	0	1	Xtal/PLL	92.14783
0	1	1	0	Xtal/PLL	122.87903
0	1	1	1	Xtal/PLL	155.51758
1	0	0	0	Direct	0
1	0	0	1	Direct	38.87939
1	0	1	0	Direct	51.83411
1	0	1	1	Direct	61.43188
1	1	0	0	Direct	77.75879
1	1	0	1	Direct	92.14783
1	1	1	0	Direct	122.87903
1	1	1	1	Direct	155.51758

Copyright WUT 2017
This documentation describes Open Hardware and is licensed under the CERN OHL v.1.1. You may redistribute and modify this documentation under the terms of the CERN OHL v.1.1. (<http://ohwr.org/CERNOHL>). This documentation is distributed WITHOUT ANY EXPRESS OR IMPLIED WARRANTY, INCLUDING MERCHANTABILITY, SATISFACTORY QUALITY AND FITNESS FOR A PARTICULAR PURPOSE. Please see the CERN OHL v.1 for applicable conditions.

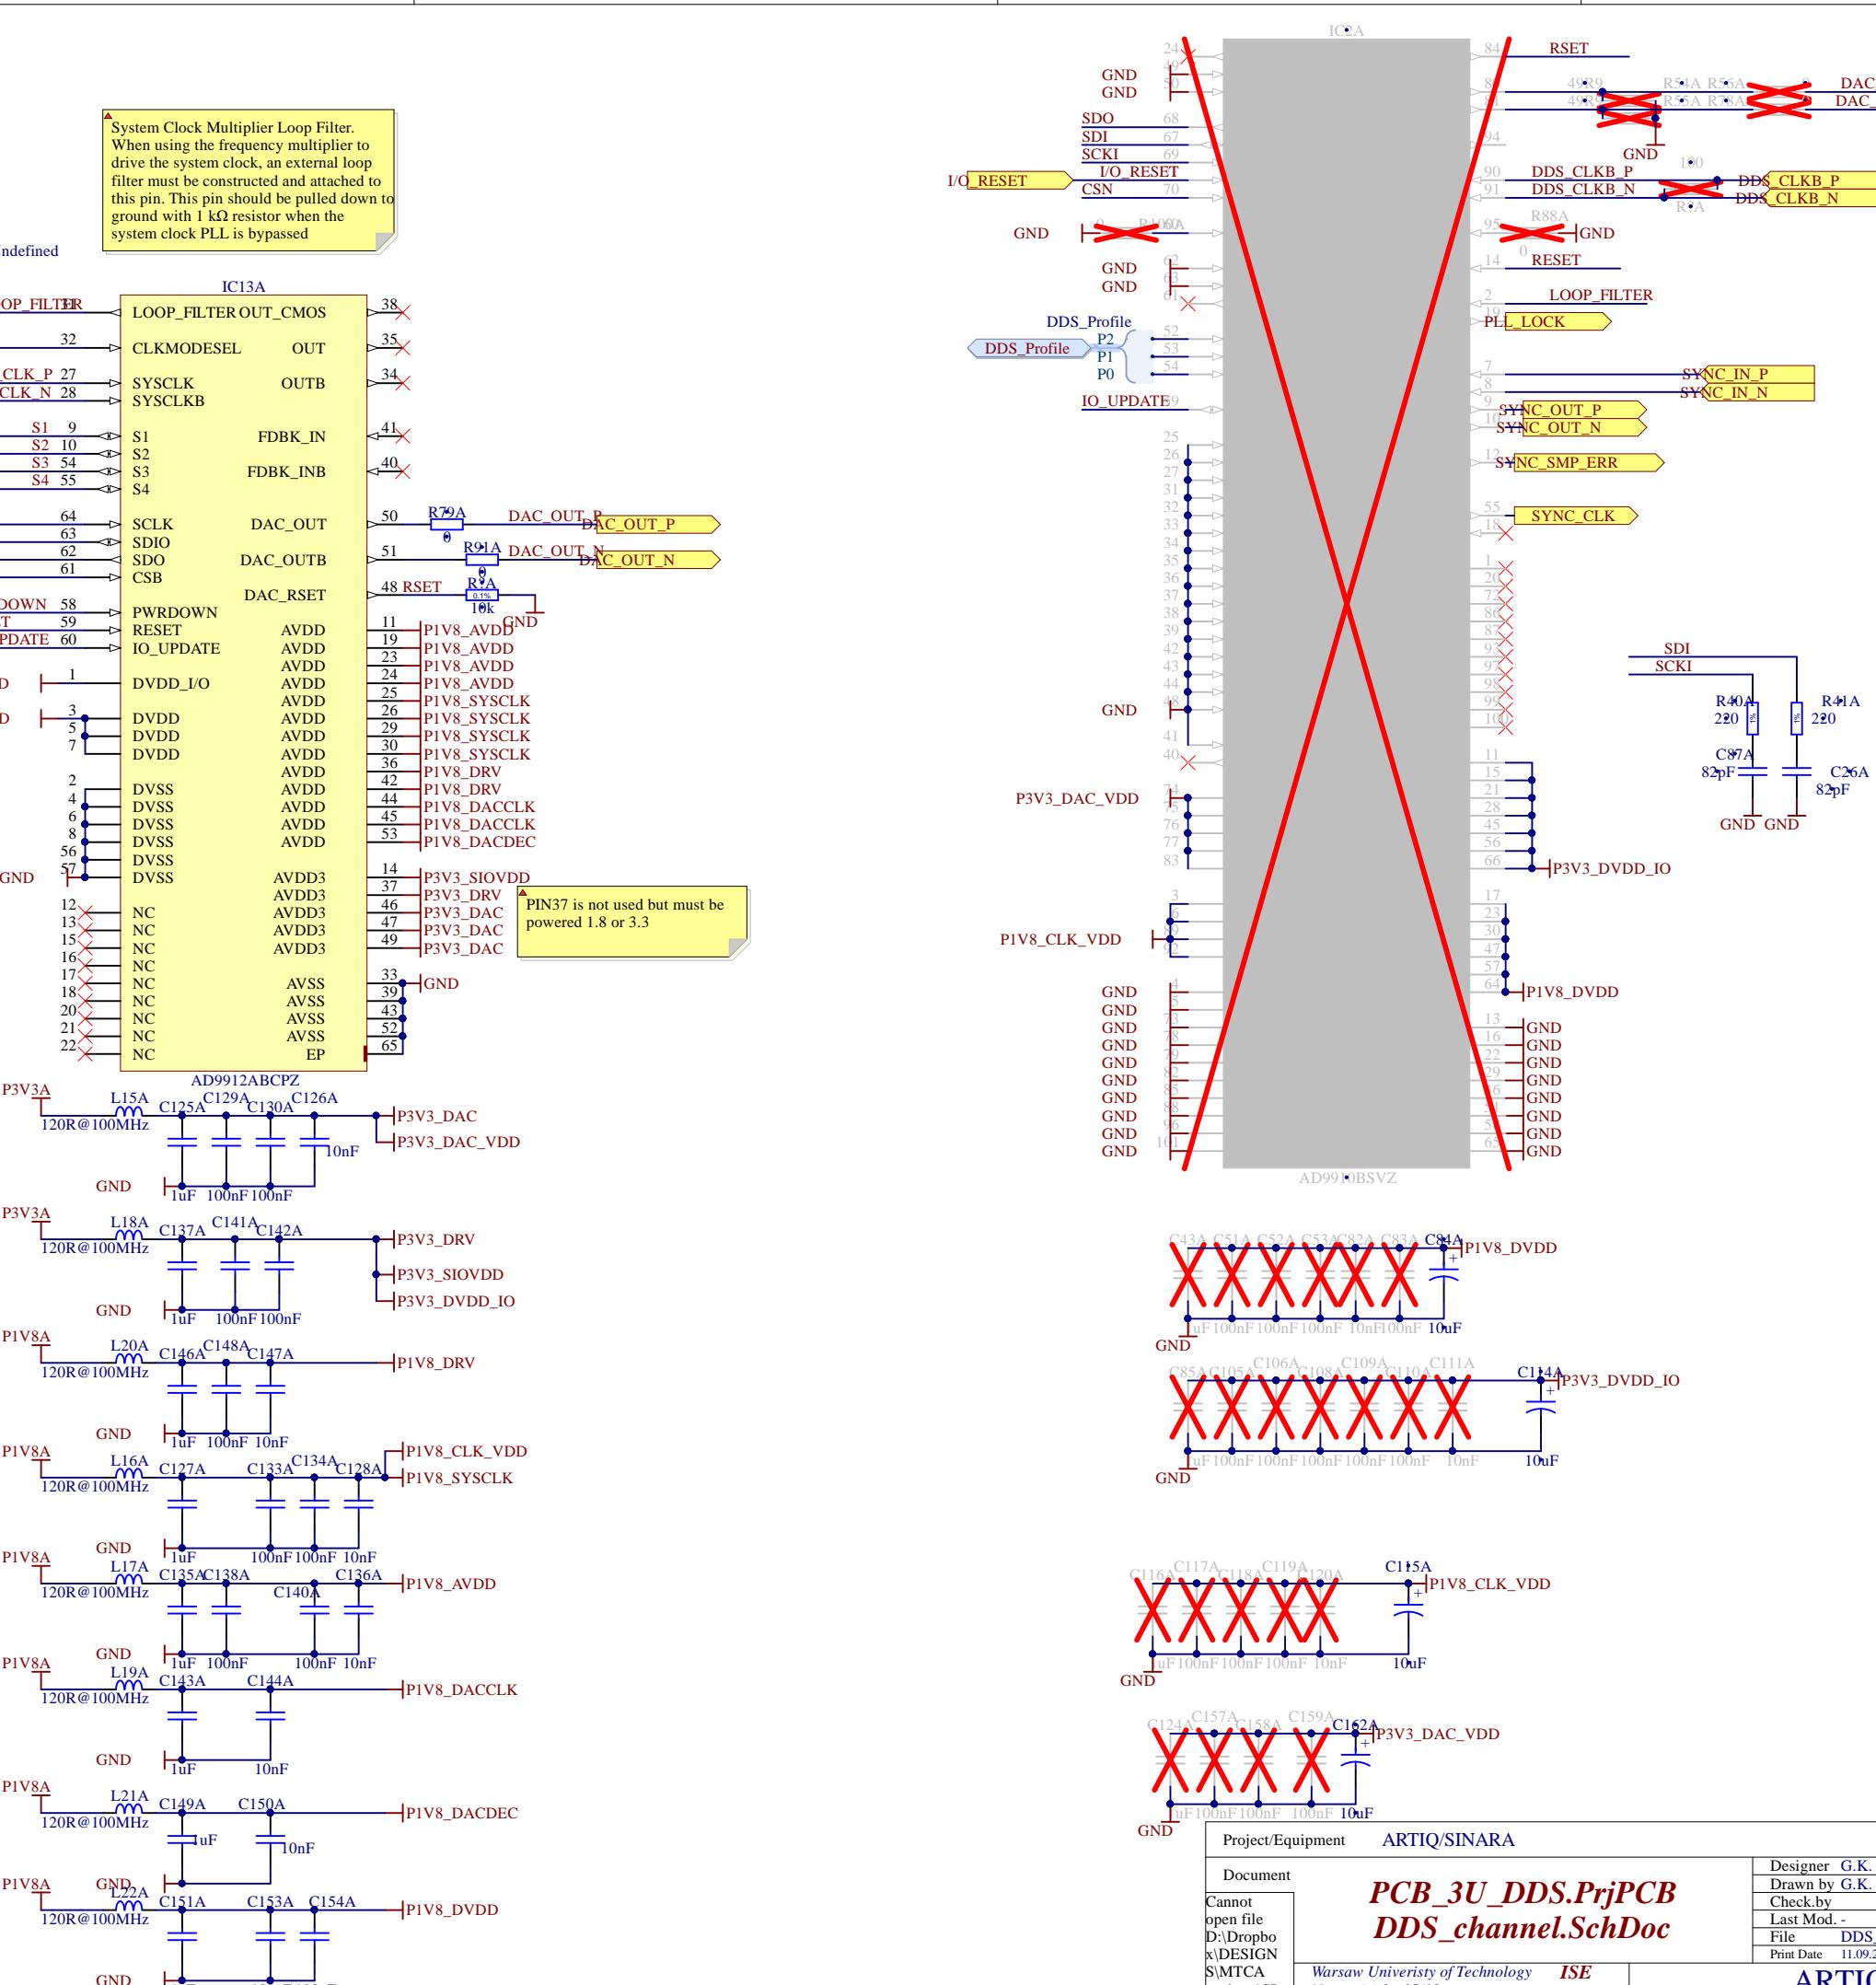

NOT MOUNTED BY DEFAULT


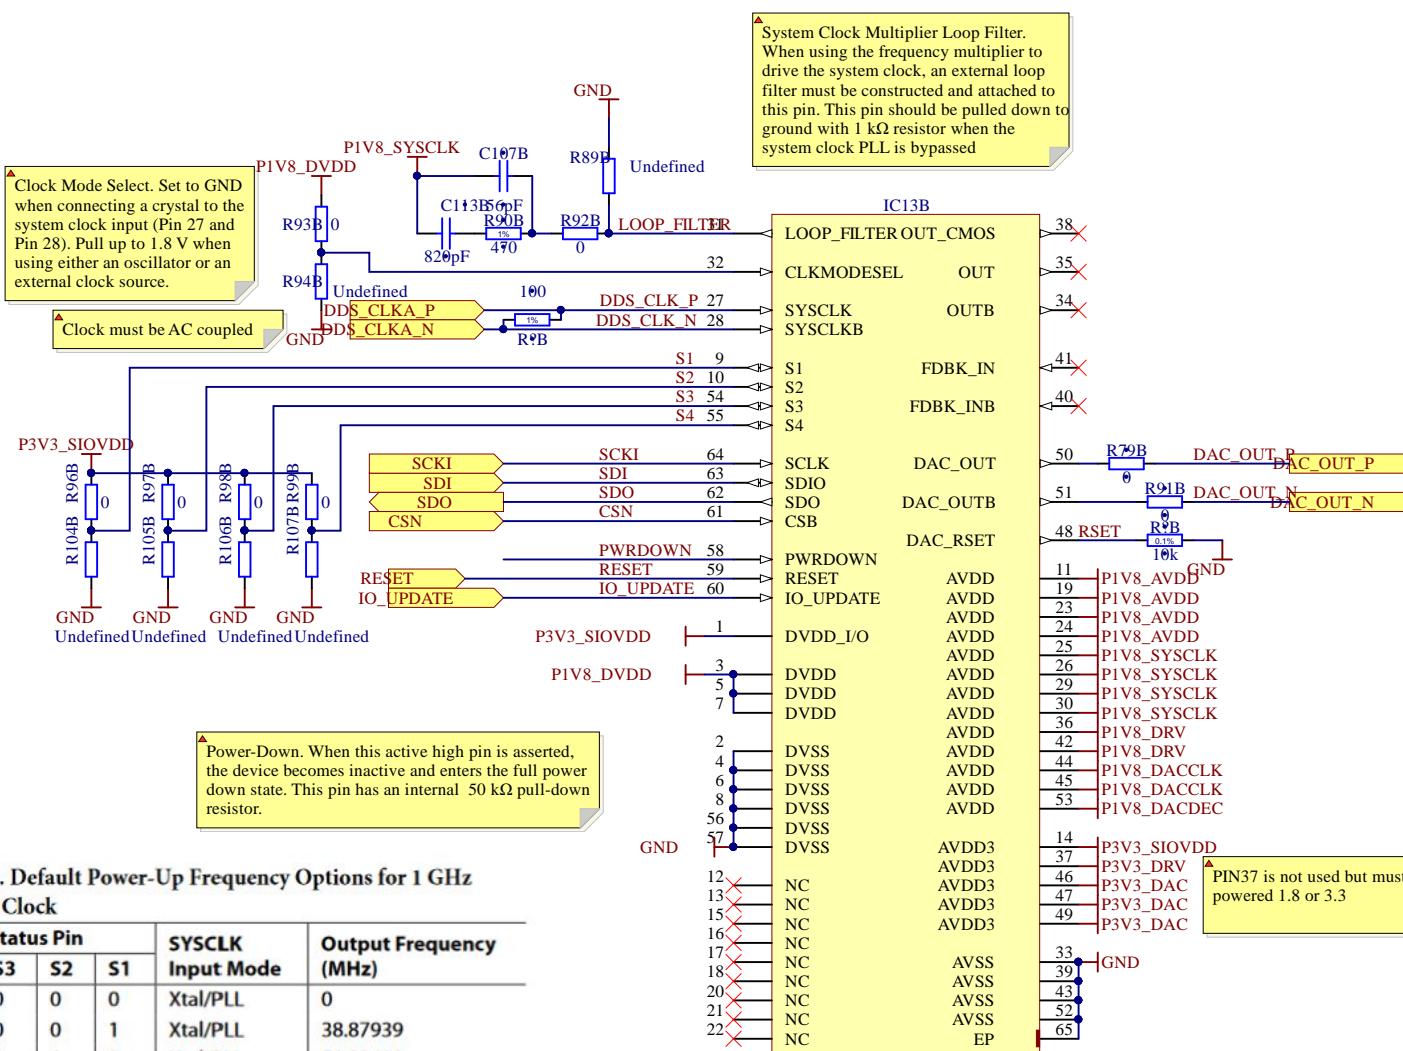


Table 8. Default Power-Up Frequency Options for 1 GHz System Clock

Status Pin				SYSCLK Input Mode	Output Frequency (MHz)
S4	S3	S2	S1		
0	0	0	0	Xtal/PLL	0
0	0	0	1	Xtal/PLL	38.87939
0	0	1	0	Xtal/PLL	51.83411
0	0	1	1	Xtal/PLL	61.43188
0	1	0	0	Xtal/PLL	77.75879
0	1	0	1	Xtal/PLL	92.14783
0	1	1	0	Xtal/PLL	122.87903
0	1	1	1	Xtal/PLL	155.51758
1	0	0	0	Direct	0
1	0	0	1	Direct	38.87939
1	0	1	0	Direct	51.83411
1	0	1	1	Direct	61.43188
1	1	0	0	Direct	77.75879
1	1	0	1	Direct	92.14783
1	1	1	0	Direct	122.87903
1	1	1	1	Direct	155.51758

Copyright WUT 2017
This documentation describes Open Hardware and is licensed under the CERN OHL v.1.1. You may redistribute and modify this documentation under the terms of the CERN OHL v.1.1. (<http://ohwr.org/CERNOHL>). This documentation is distributed WITHOUT ANY EXPRESS OR IMPLIED WARRANTY, INCLUDING MERCHANTABILITY, SATISFACTORY QUALITY AND FITNESS FOR A PARTICULAR PURPOSE. Please see the CERN OHL v.1 for applicable conditions.

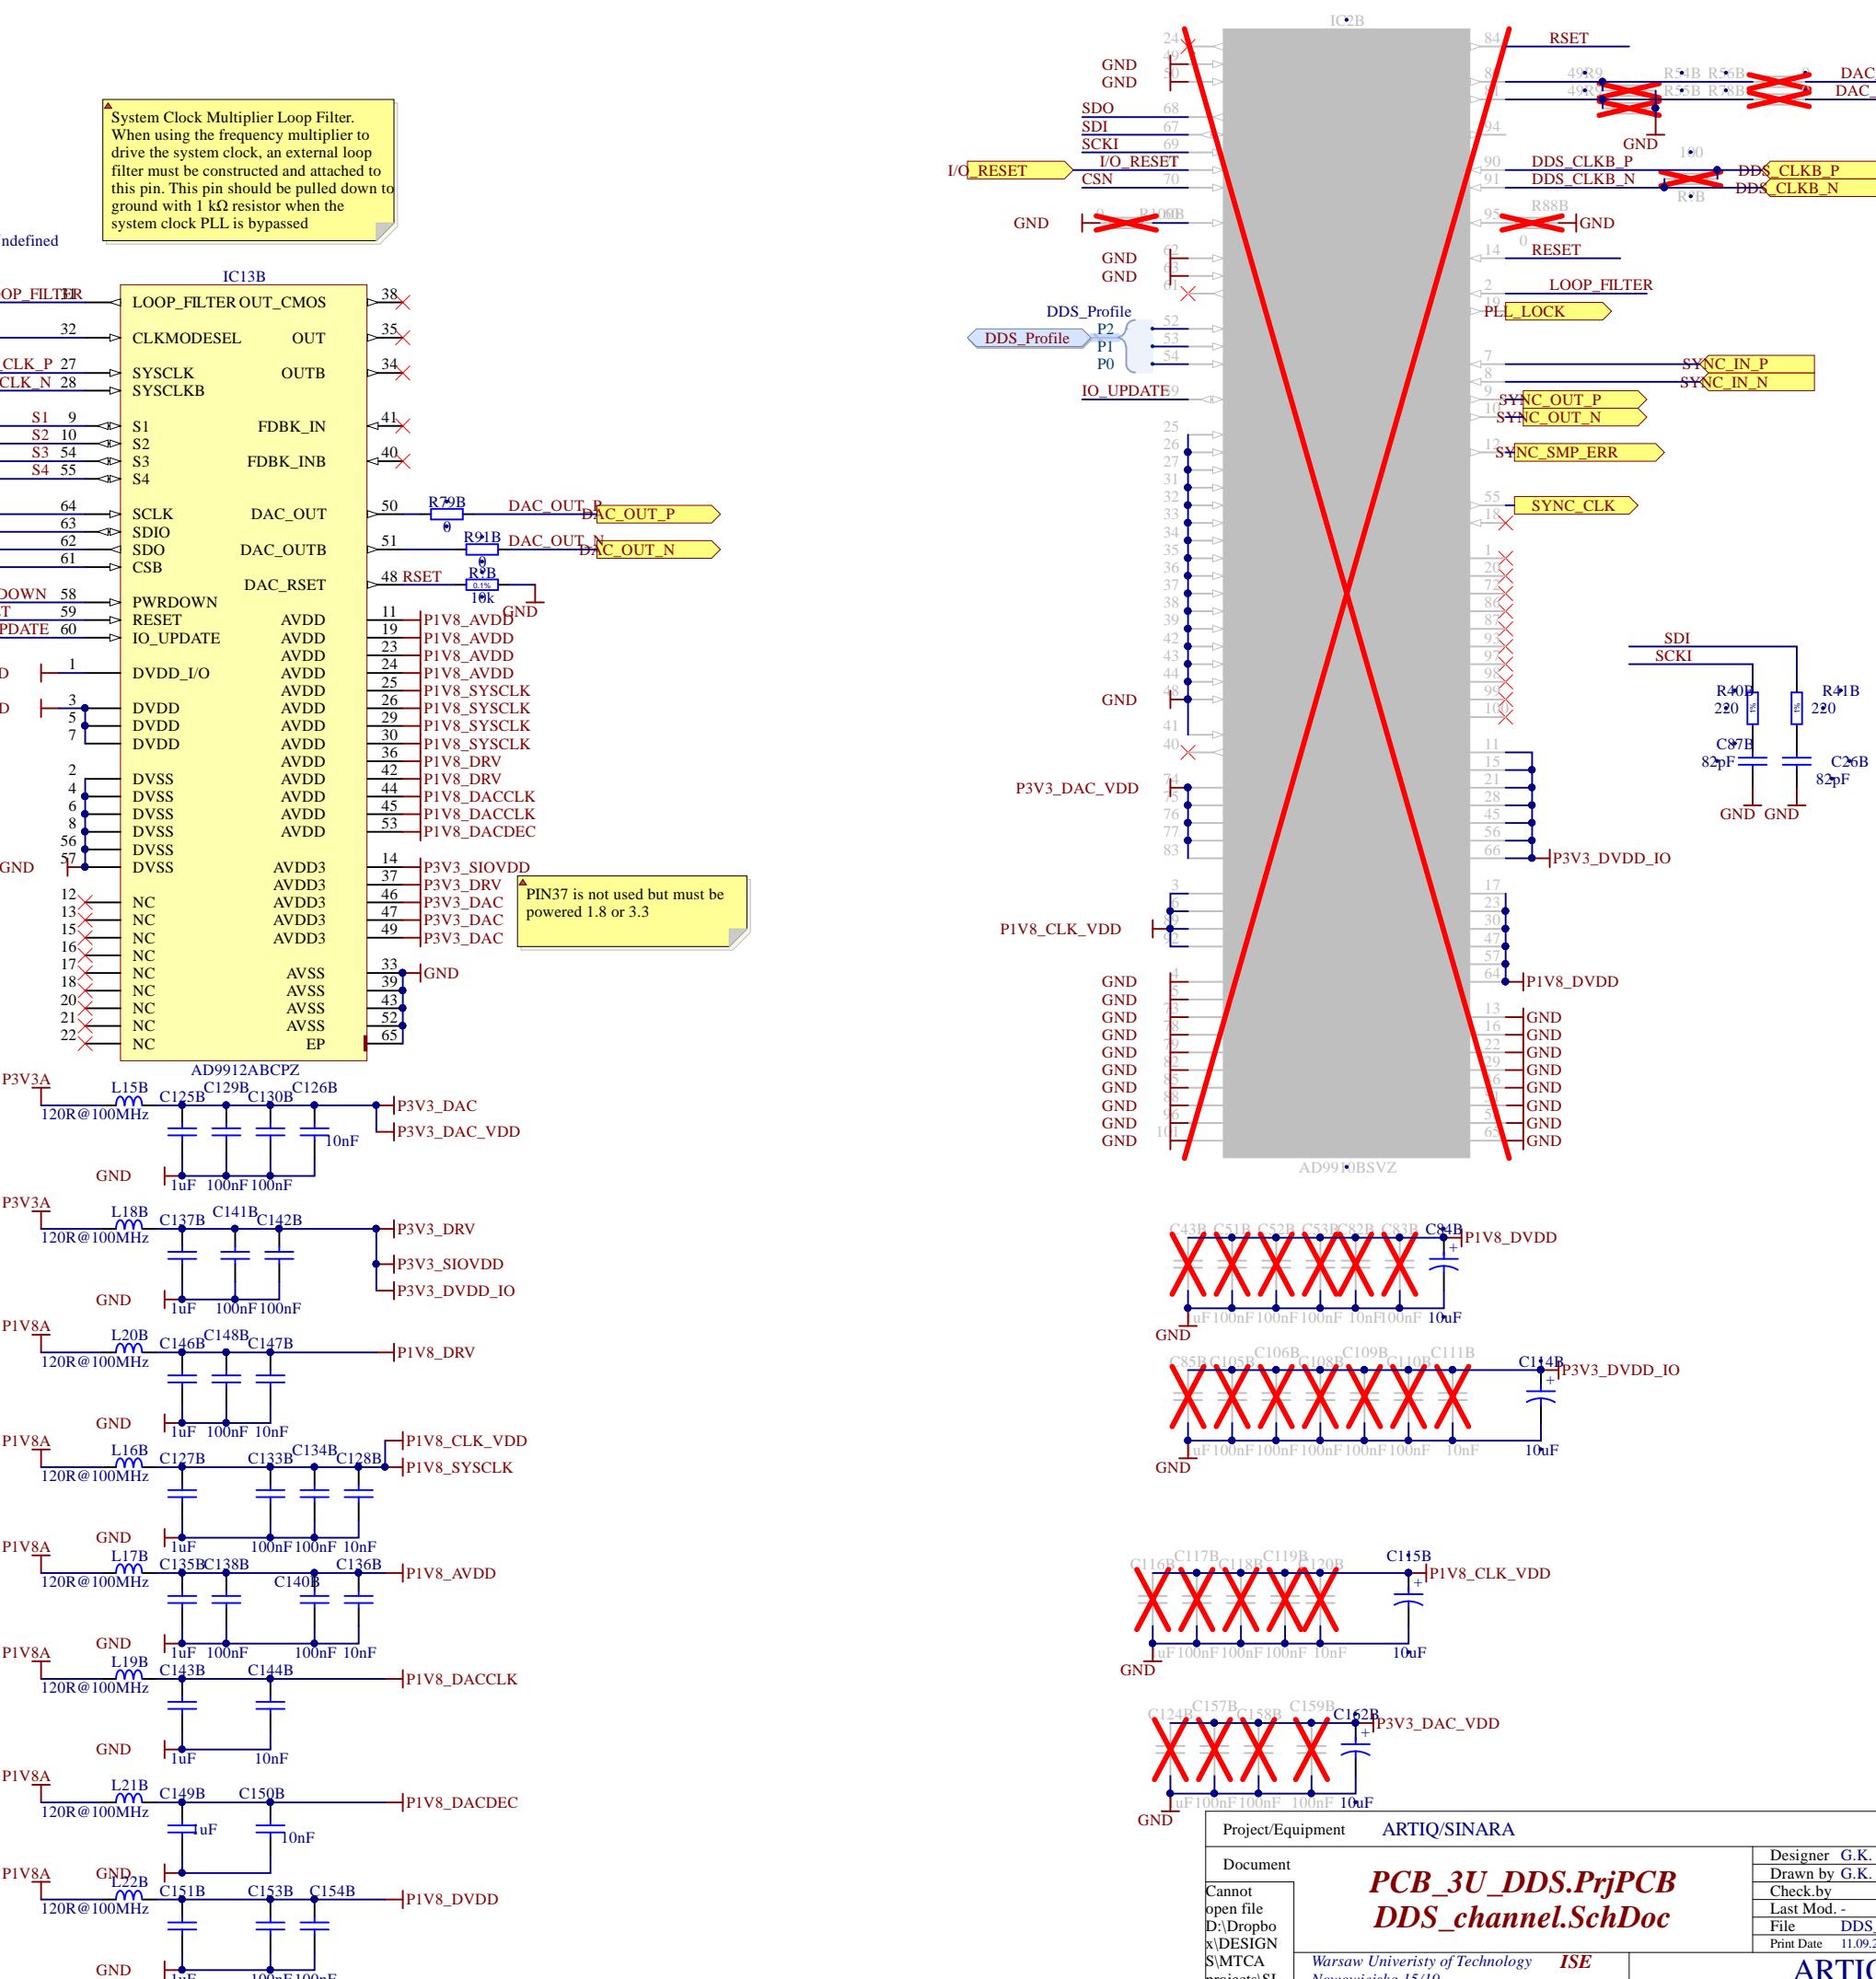

NOT MOUNTED BY DEFAULT


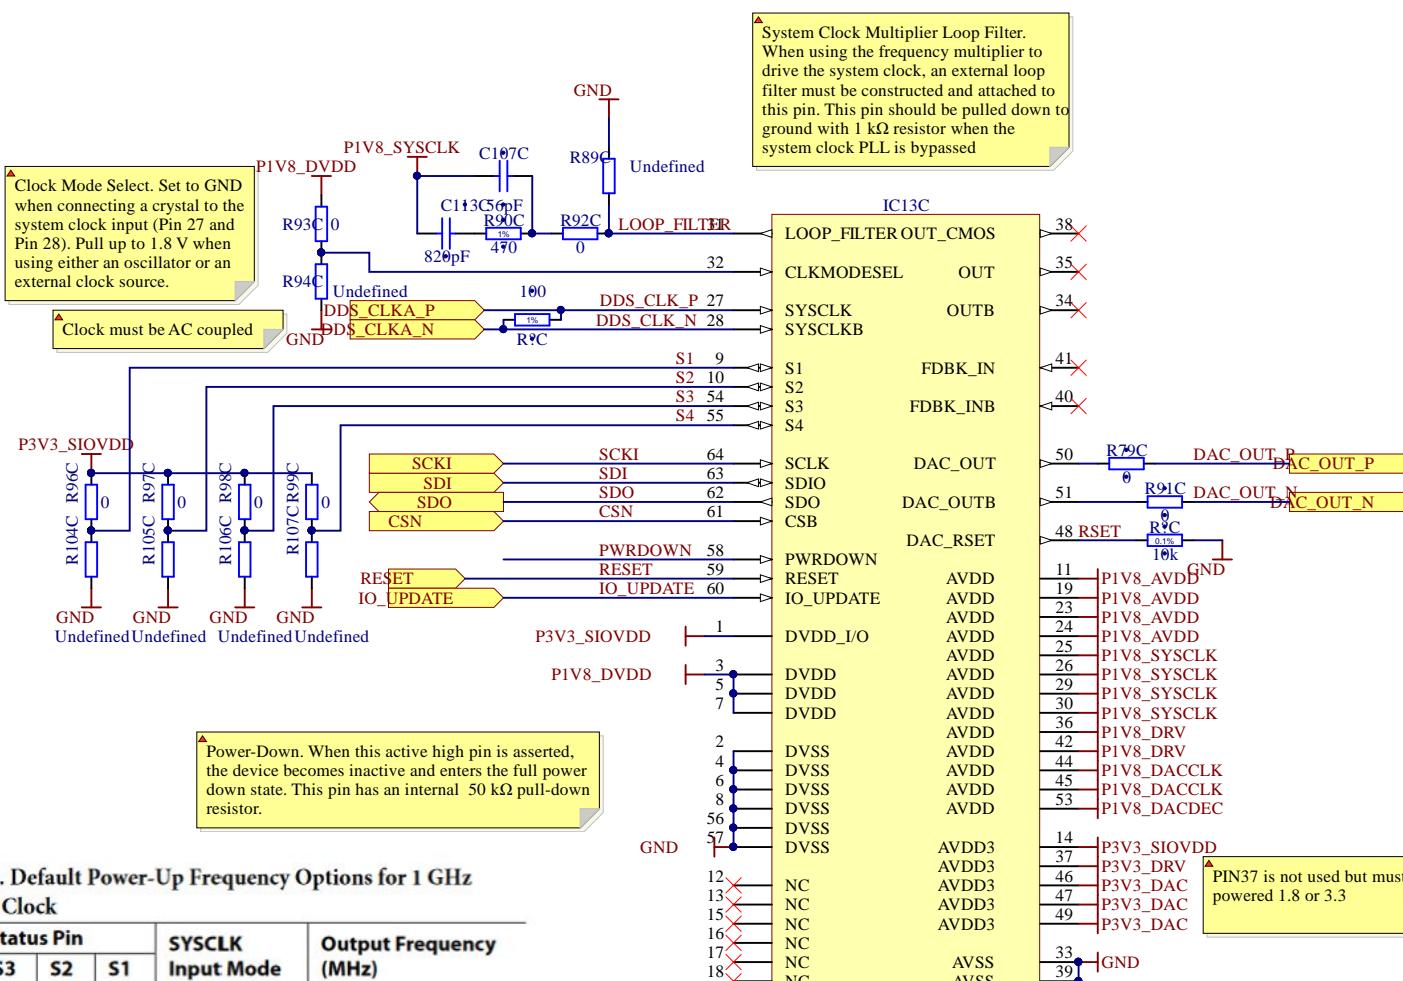


Table 8. Default Power-Up Frequency Options for 1 GHz System Clock

Status Pin				SYSCLK Input Mode	Output Frequency (MHz)
S4	S3	S2	S1		
0	0	0	0	Xtal/PLL	0
0	0	0	1	Xtal/PLL	38.87939
0	0	1	0	Xtal/PLL	51.83411
0	0	1	1	Xtal/PLL	61.43188
0	1	0	0	Xtal/PLL	77.75879
0	1	0	1	Xtal/PLL	92.14783
0	1	1	0	Xtal/PLL	122.87903
0	1	1	1	Xtal/PLL	155.51758
1	0	0	0	Direct	0
1	0	0	1	Direct	38.87939
1	0	1	0	Direct	51.83411
1	0	1	1	Direct	61.43188
1	1	0	0	Direct	77.75879
1	1	0	1	Direct	92.14783
1	1	1	0	Direct	122.87903
1	1	1	1	Direct	155.51758

Copyright WUT 2017
This documentation describes Open Hardware and is licensed under the CERN OHL v.1.1. You may redistribute and modify this documentation under the terms of the CERN OHL v.1.1. (<http://ohwr.org/CERNOHL>). This documentation is distributed WITHOUT ANY EXPRESS OR IMPLIED WARRANTY, INCLUDING MERCHANTABILITY, SATISFACTORY QUALITY AND FITNESS FOR A PARTICULAR PURPOSE. Please see the CERN OHL v.1 for applicable conditions.

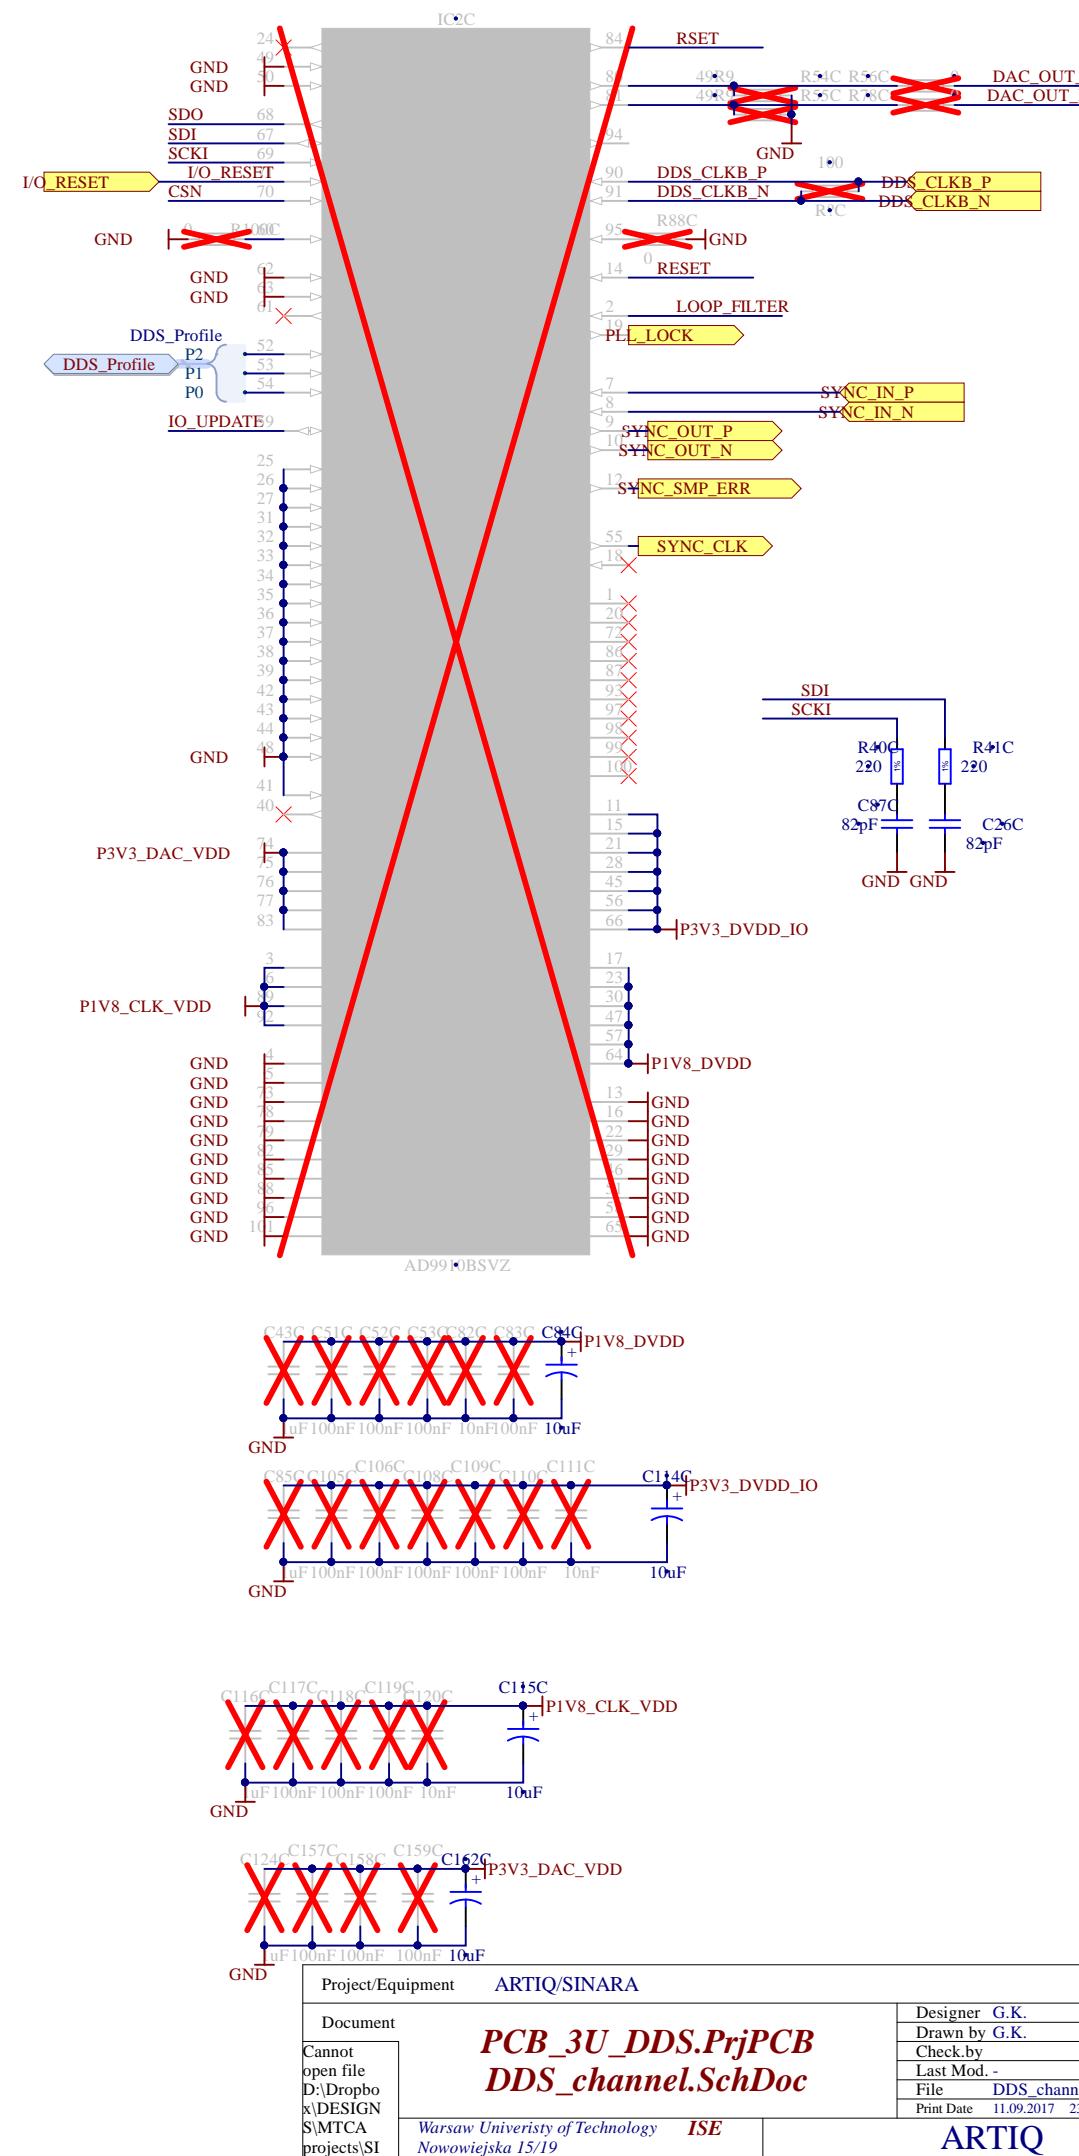

NOT MOUNTED BY DEFAULT




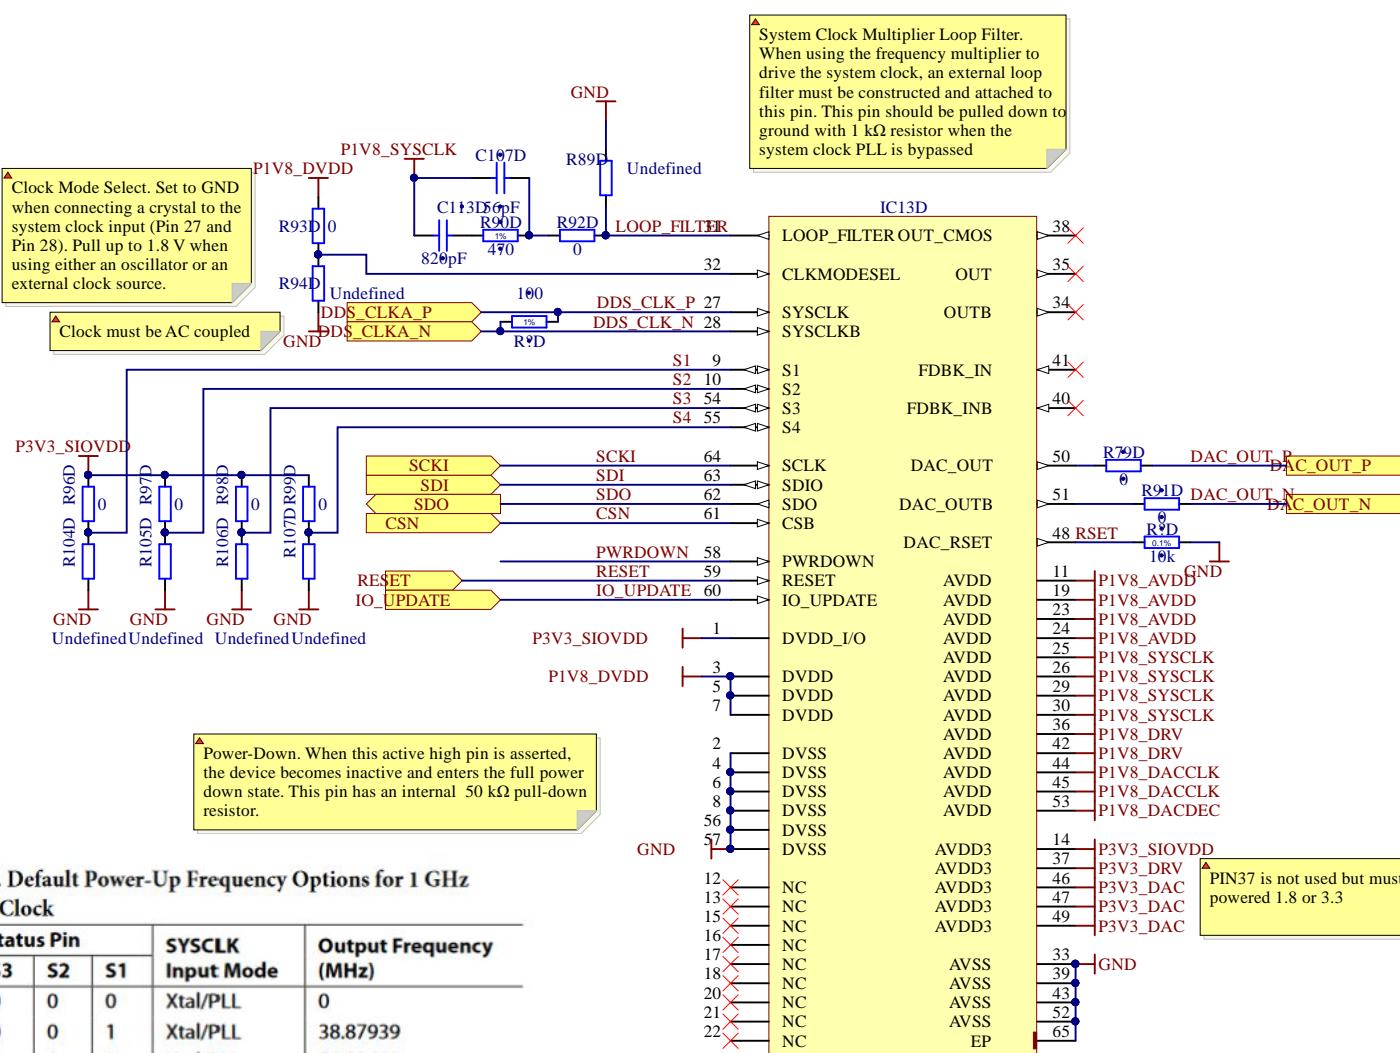


Table 8. Default Power-Up Frequency Options for 1 GHz System Clock

Status Pin				SYSCLK Input Mode	Output Frequency (MHz)
S4	S3	S2	S1		
0	0	0	0	Xtal/PLL	0
0	0	0	1	Xtal/PLL	38.87939
0	0	1	0	Xtal/PLL	51.83411
0	0	1	1	Xtal/PLL	61.43188
0	1	0	0	Xtal/PLL	77.75879
0	1	0	1	Xtal/PLL	92.14783
0	1	1	0	Xtal/PLL	122.87903
0	1	1	1	Xtal/PLL	155.51758
1	0	0	0	Direct	0
1	0	0	1	Direct	38.87939
1	0	1	0	Direct	51.83411
1	0	1	1	Direct	61.43188
1	1	0	0	Direct	77.75879
1	1	0	1	Direct	92.14783
1	1	1	0	Direct	122.87903
1	1	1	1	Direct	155.51758


Copyright WUT 2017
This documentation describes Open Hardware and is licensed under the CERN OHL v.1.1. You may redistribute and modify this documentation under the terms of the CERN OHL v.1.1. (<http://ohwr.org/CERNOHL>). This documentation is distributed WITHOUT ANY EXPRESS OR IMPLIED WARRANTY, INCLUDING MERCHANTABILITY, SATISFACTORY QUALITY AND FITNESS FOR A PARTICULAR PURPOSE. Please see the CERN OHL v.1 for applicable conditions.

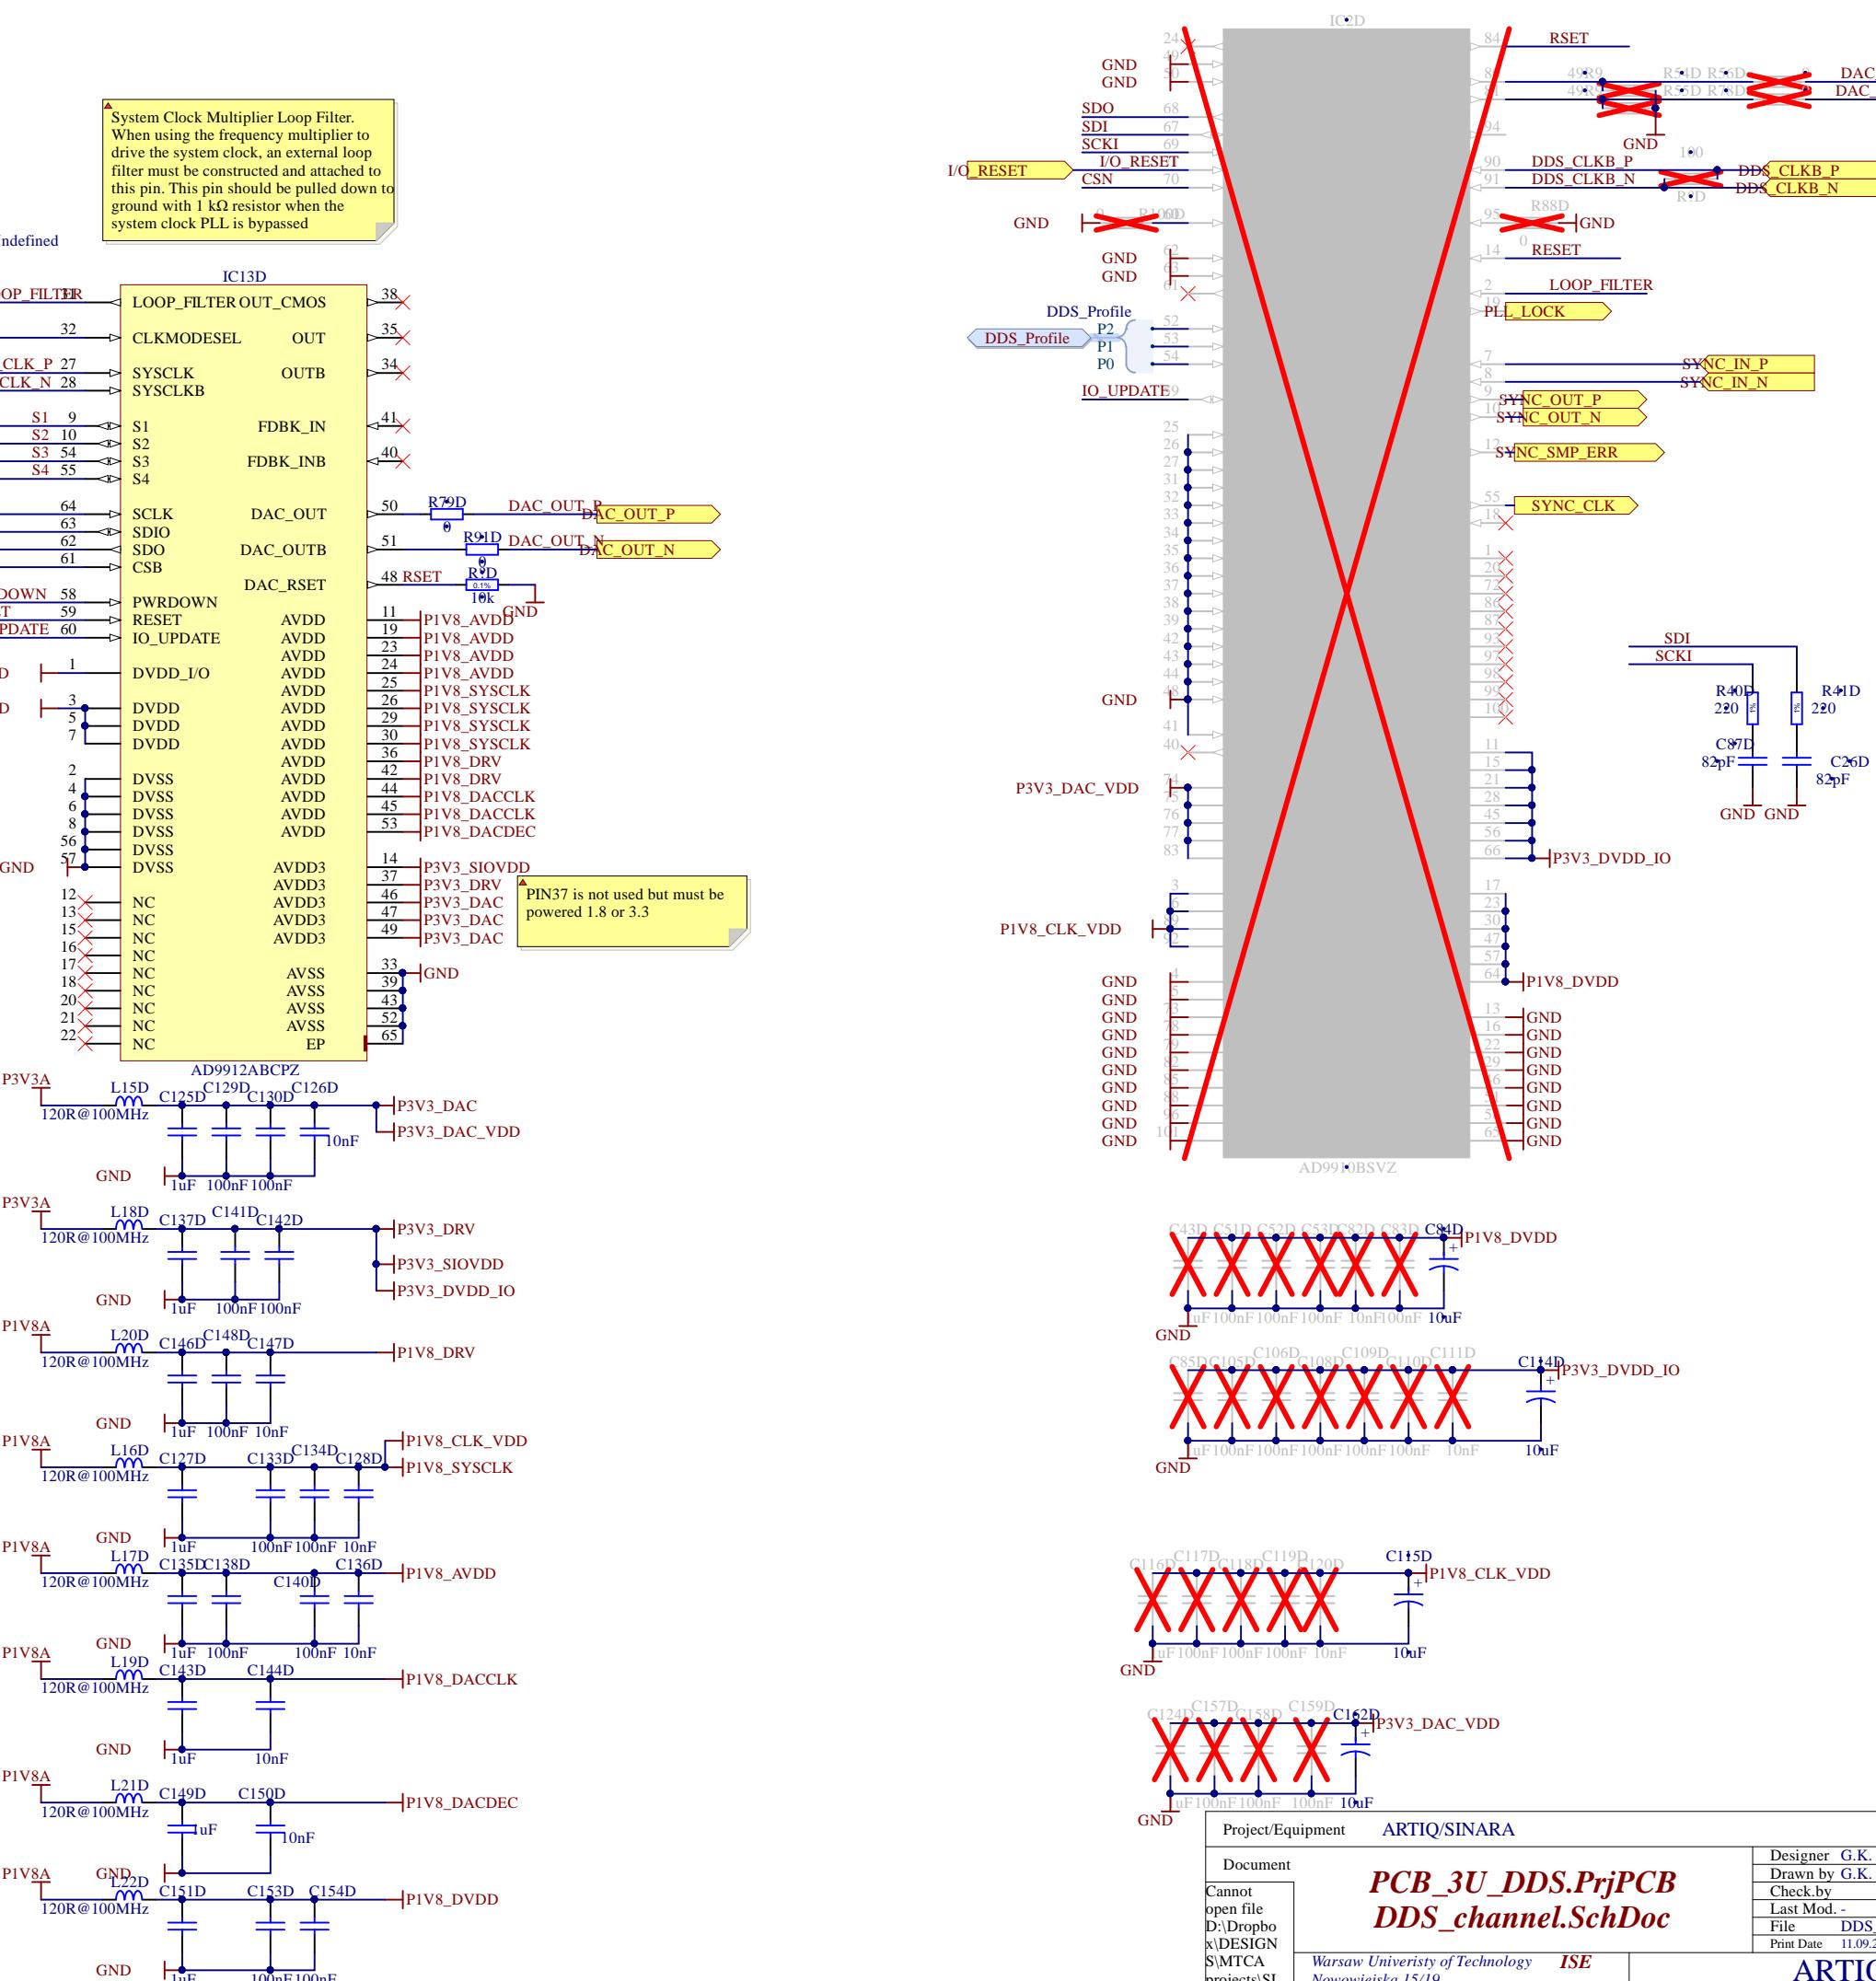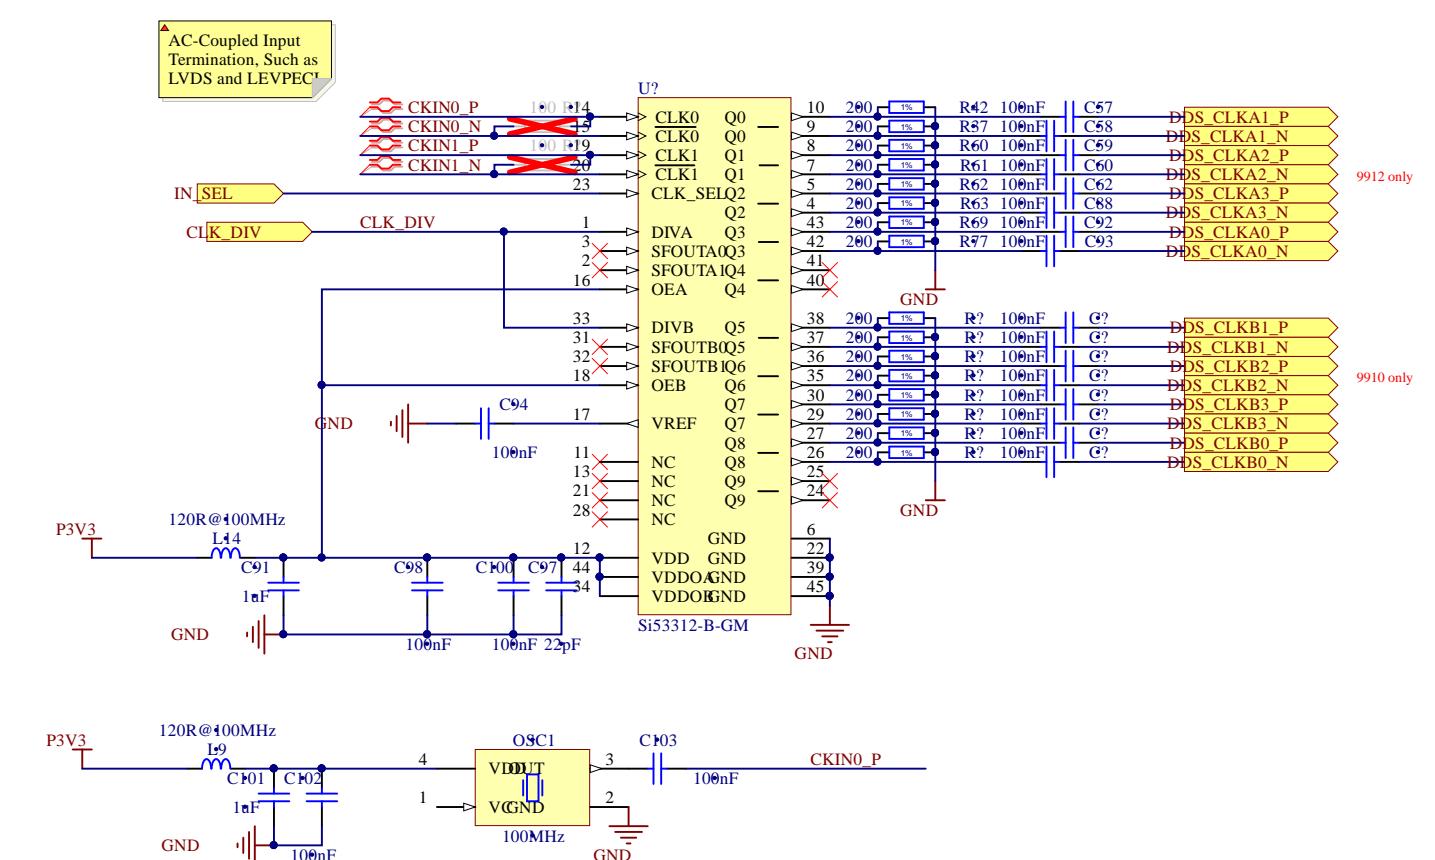


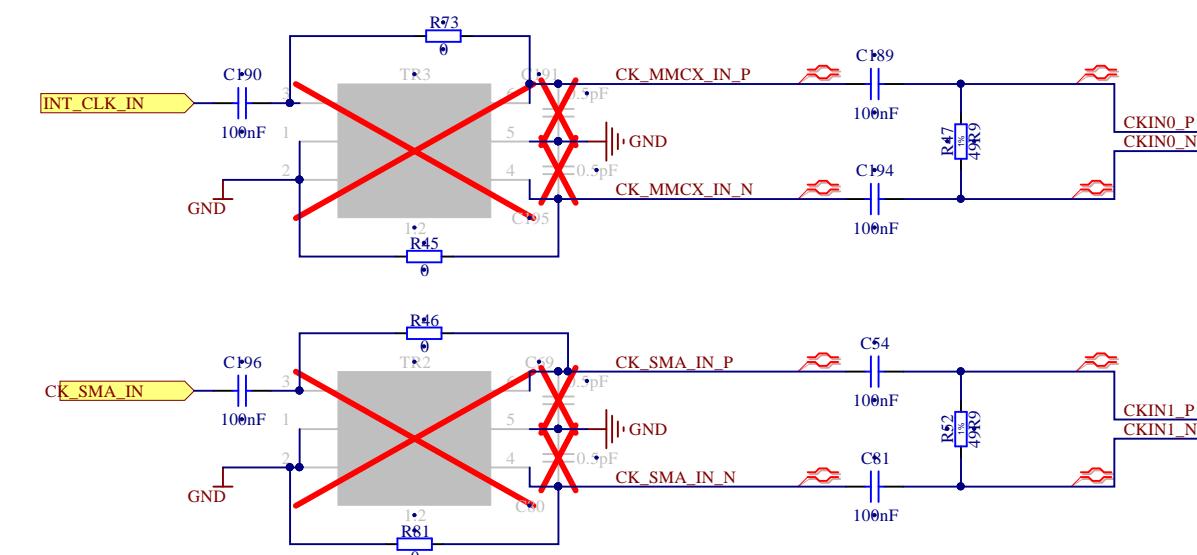

Copyright WUT 2017
This documentation describes Open Hardware and is licensed under the CERN OHL v.1.1. You may redistribute and modify this documentation under the terms of the CERN OHL v.1.1.
(<http://ohwr.org/CERNOHL>). This documentation is distributed WITHOUT ANY EXPRESS OR IMPLIED WARRANTY, INCLUDING MERCHANTABILITY, SATISFACTORY QUALITY AND FITNESS FOR A PARTICULAR PURPOSE. Please see the CERN OHL v.1.1 for applicable conditions.

Project/Equipment		ARTIQ/SINARA	
Document	Designer	Drawn by	Date
Cannot open file D:\Dropbox\DESIGN\SMTCA projects\SI	G.K.	XX/XX/XXXX	
		Check by	-
		Last Mod.	10.09.2017
		File	CLK_INPUT.SchDoc
		Print Date	11.09.2017 23:02:00
		Sheet	6 of 7
		Warsaw University of Technology ISE Nowowiejska 15/19	
		ARTIQ	A3

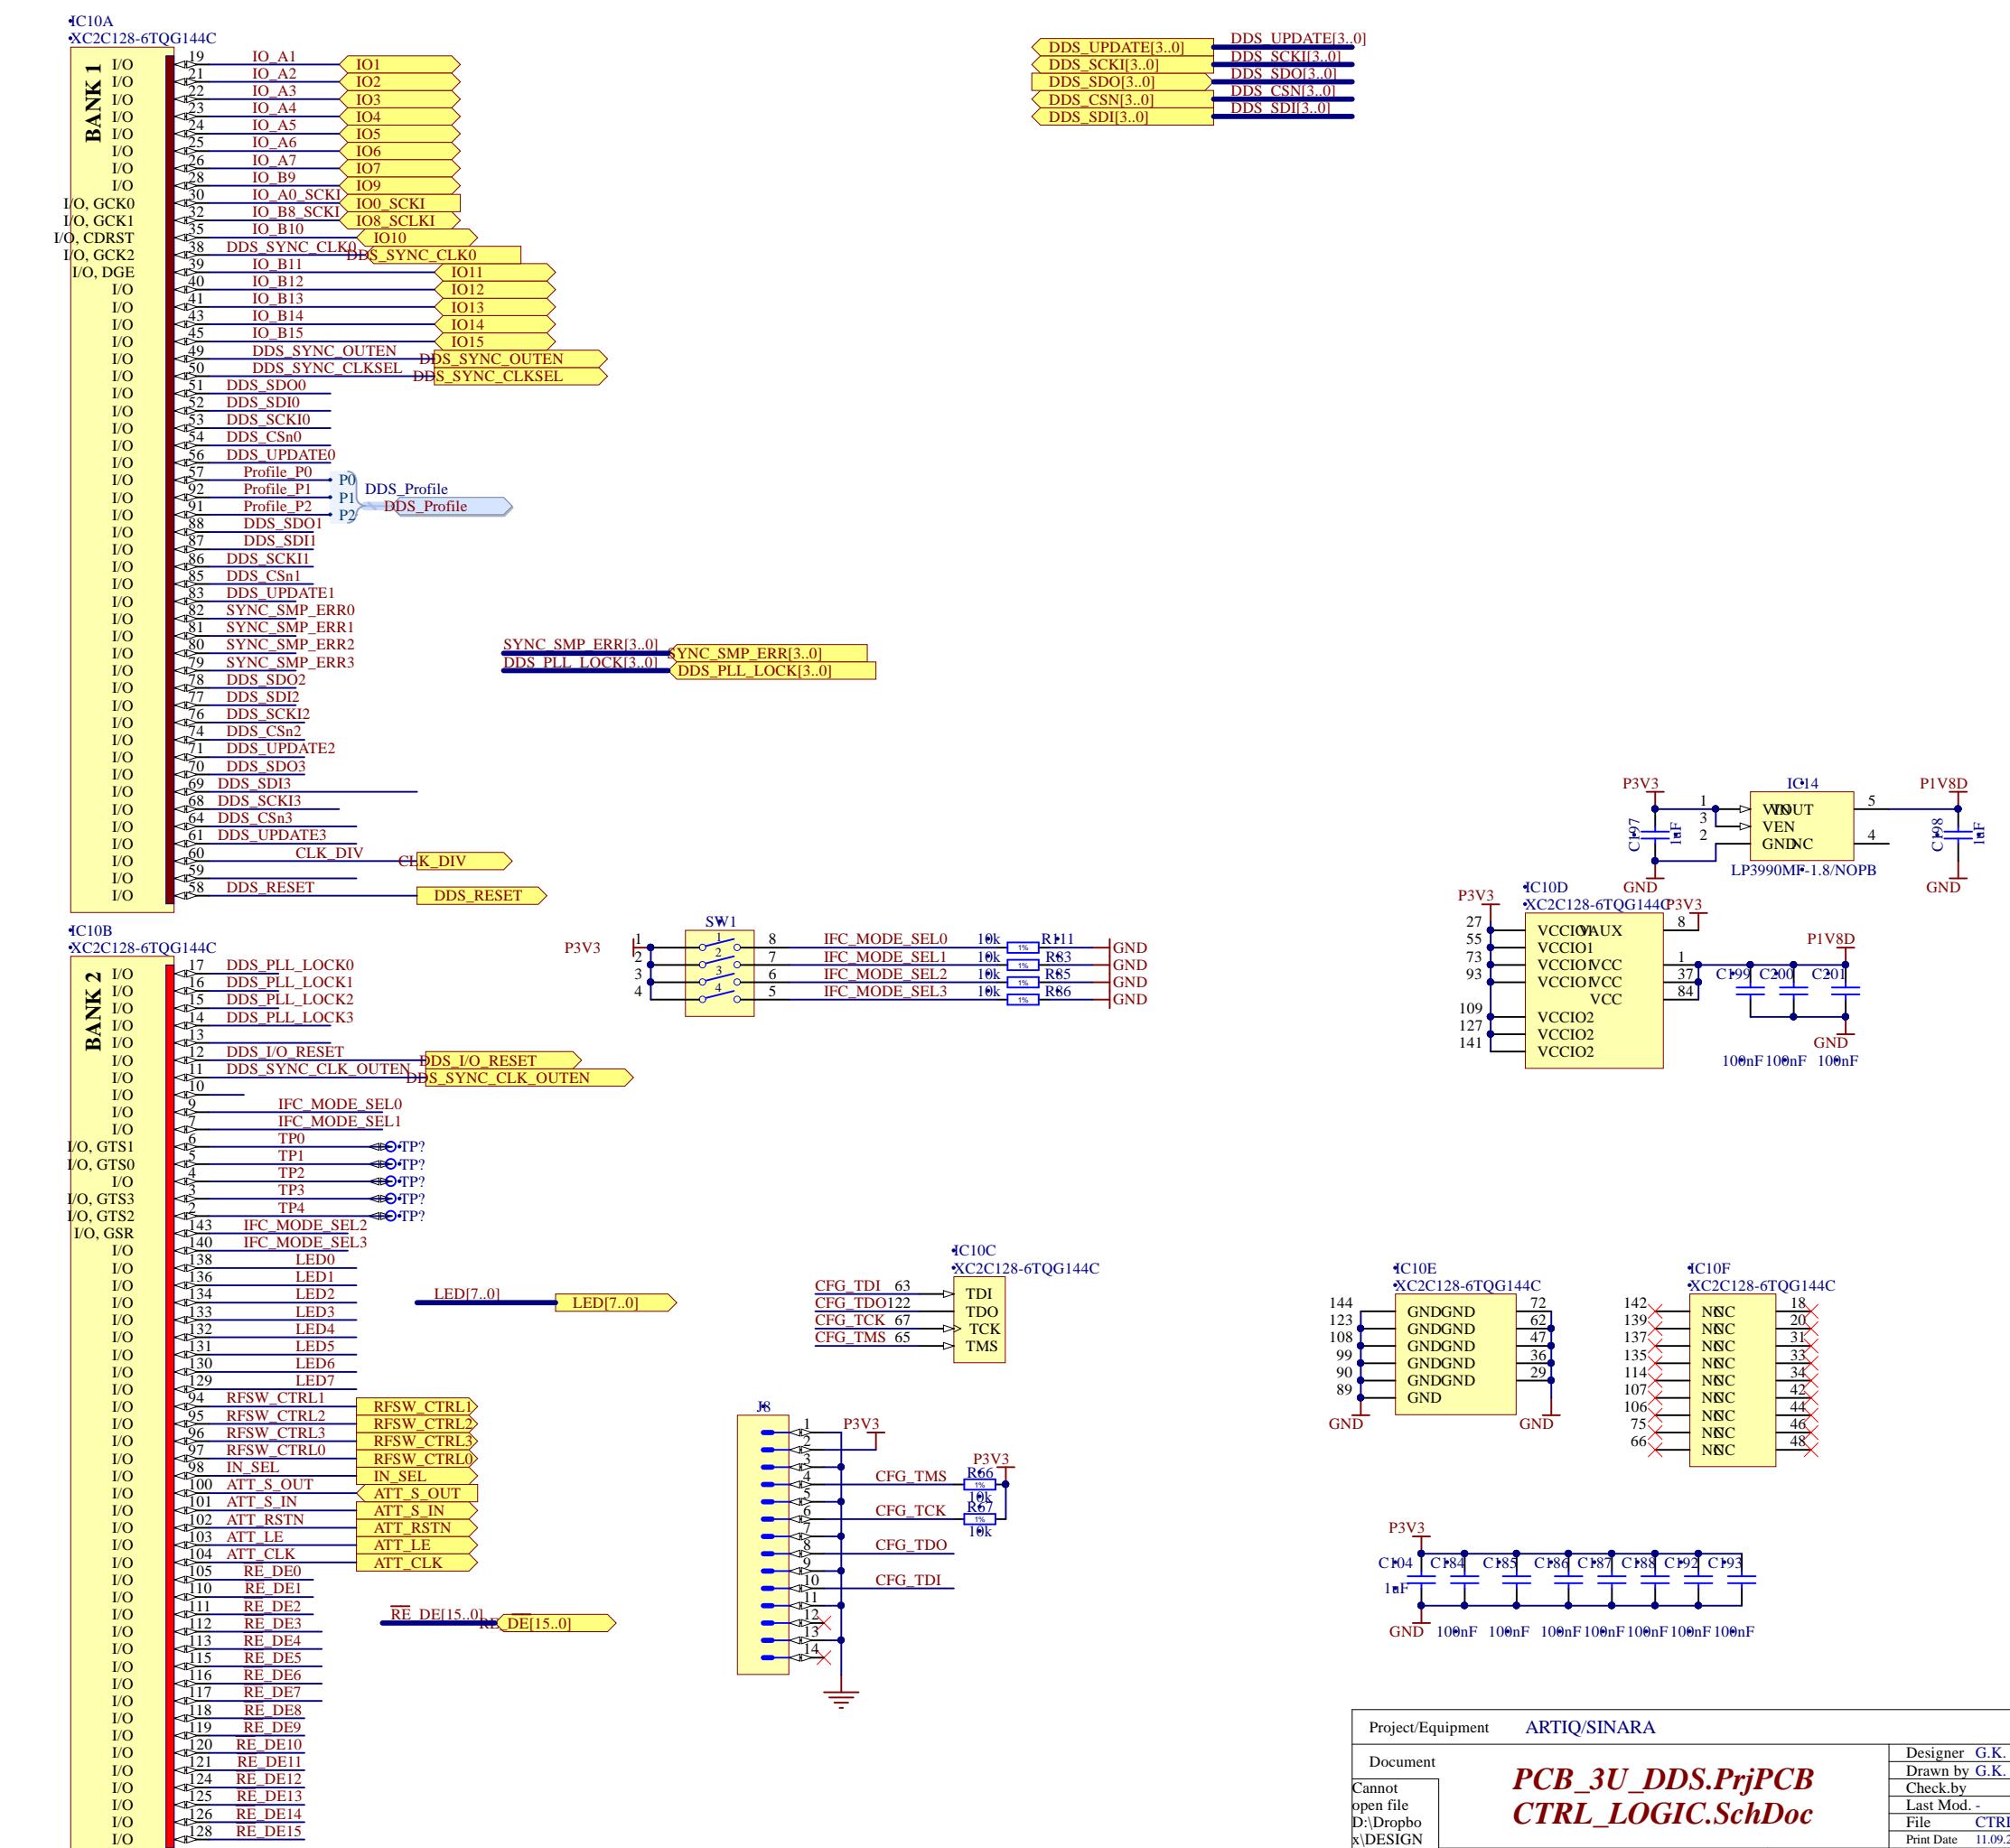

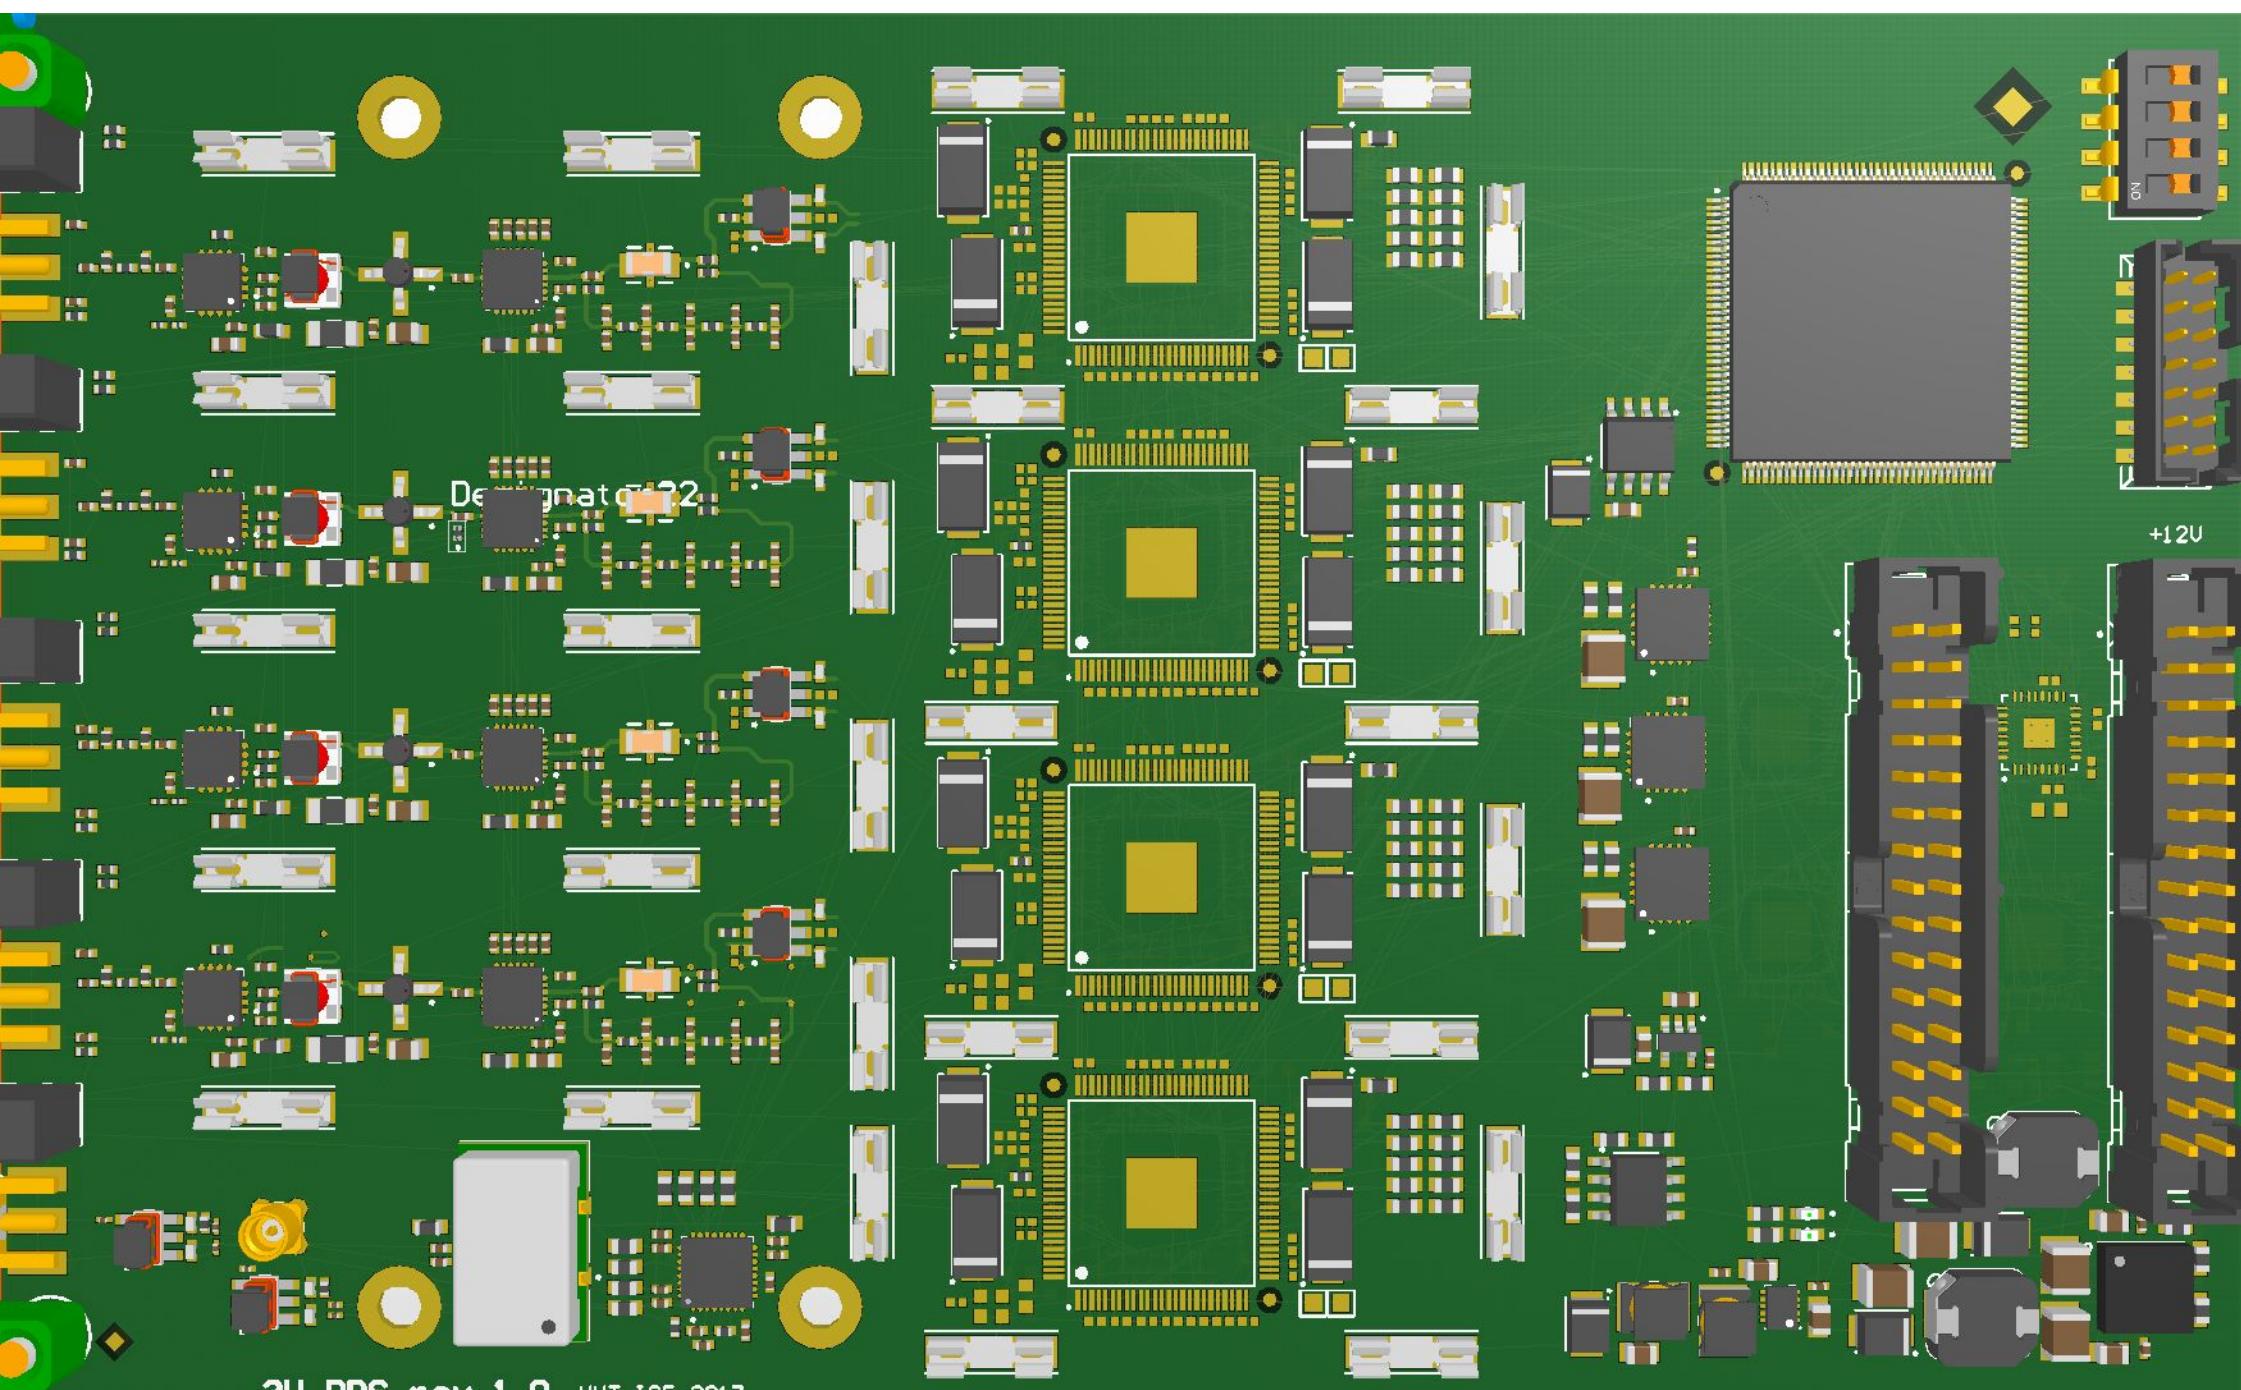

3U DDS rev 1.0 WUT ISE 2017

