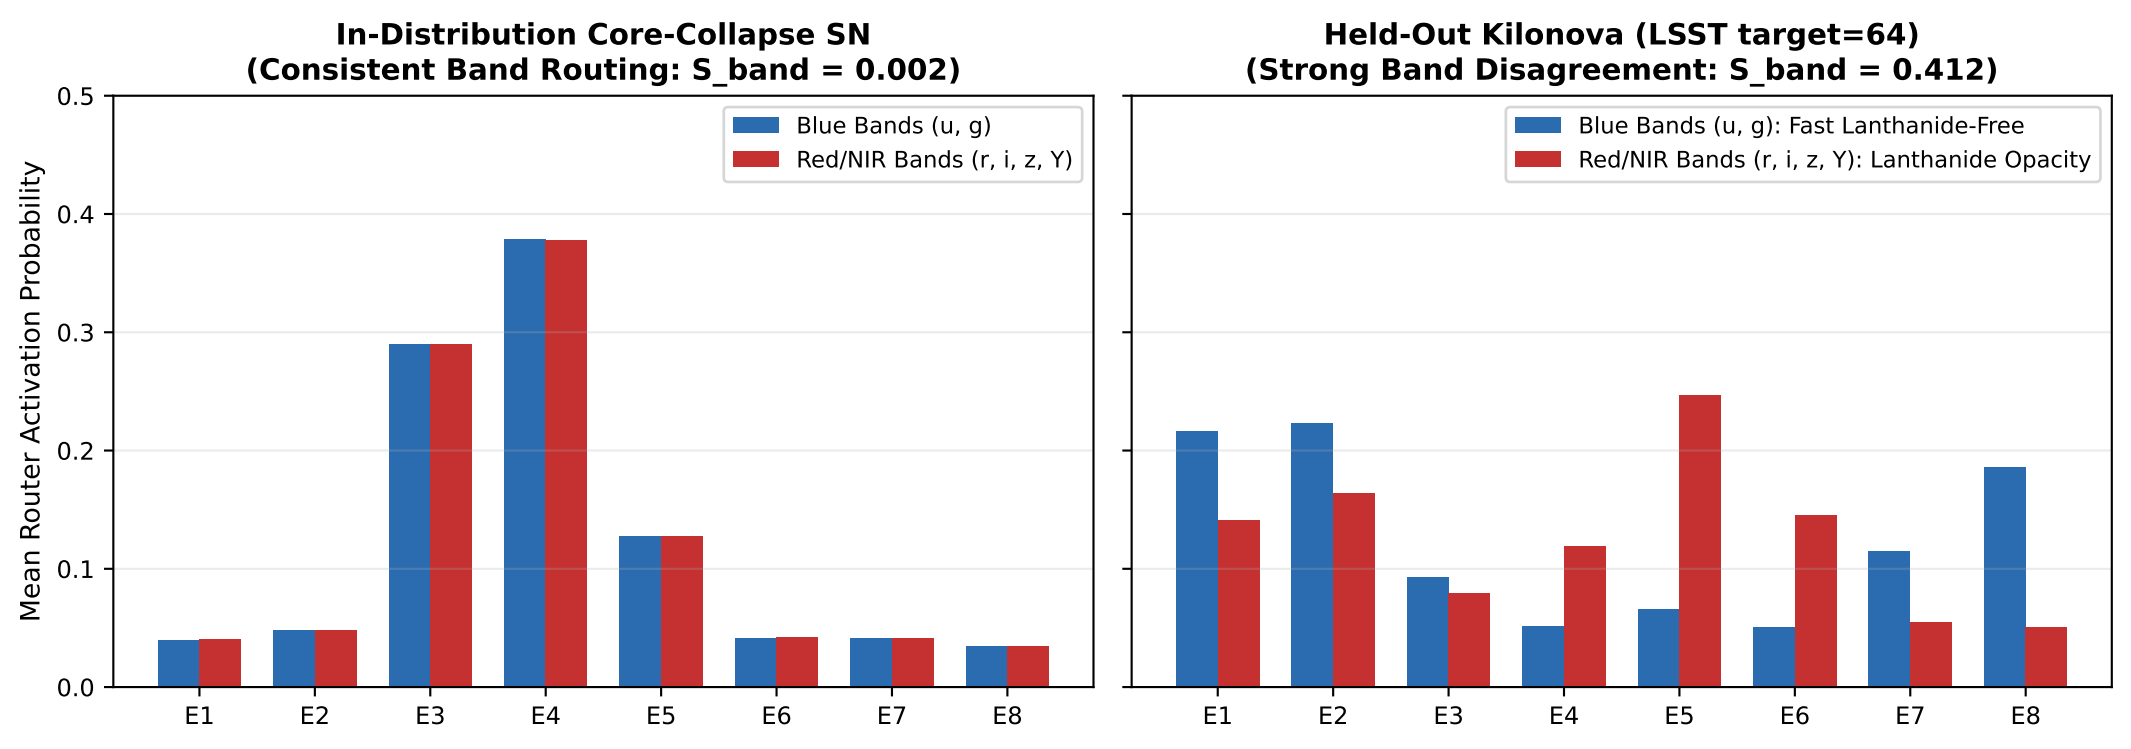
In-Distribution Core-Collapse SN
(Consistent Band Routing: S_band = 0.002)
Held-Out Kilonova (LSST target=64)
(Strong Band Disagreement: S_band = 0.412)
Mean Router Activation Probability
0.0
0.1
0.2
0.3
0.4
0.5
Blue Bands (u, g)
Red/NIR Bands (r, i, z, Y)
Blue Bands (u, g): Fast Lanthanide-Free
Red/NIR Bands (r, i, z, Y): Lanthanide Opacity
E1
E2
E3
E4
E5
E6
E7
E8