R9 110K 1% TP1 ⊚—— R10 4.7K ≤ 1% ≤ +3:,3V 1113 W 188 C-P40 33 HWA0 39 HWA1 39 HWA2 35 HWA3 35 13.3V 0.1u 0.1u 7.7k 0.1u HNGLK2 105 HNGLK2 105 105 HWSDATA 102 HWSCLK 103 HWSCAT 108 HSCAM 129
HSCAM 129
HSCA 126
HSCA 126
HSCA 127
H PA VCC45 22 VCC65 24 VCC6 24 VCC6 24 VCC6 24 VCC6 20 PPNB 10 PF 10 PN 10 GND 0 4 B5 W 27 B6 W 2 CR1 CSACW48MOX 48MHZ 2 COM 14 GND 10 GND 10 GND 10 GND ANGE 31 17_O NC 5 8 SP 5 8 SI2 5 8 SI1 BOLDATAS

BOLDAT

> Model : Stylus C41/42 UX Board : C482MAIN—C Board

Rev. : D Sheet : 1 / 1

1 390p MGND 44 CAS 44 CAS 46 CS2 U1 (for IC6)

Q1

Q2


///
GND

未実装

Not mounted 812 4.7k 1X +3;3v 1112 <u>184</u> +3.3V 0.10 F46 0.10 F777 6ND HWSDATA 103 HWSCLK 103 HWSCAT 108 HSDCMD 129 HSD2 126 HSD2 126 HSD2 127 H VCC45 22 VCC5 24 NPMB 16 NPMB 15 DOUT 9 D.P. 154 D.P. 154 OUT-00 1 + C40 ZZ 10u 63V 105Deg 2 COM 12 GND 10 GND 10 GND 10 GND 1777 GND 17_O NC 5 SP 5 SI2 5 SI1 18 CSCK
22 CSCK
22 CSSA
20 CSSA
21 CVDD
100p GND -ACK 8 19 BUSY 8 12 SLCT 8 32 -INIT 8 31 -INIT 8 14 -INIT 8 36 -SLIN 8 36 LH 0 18 CENTRONICS

> Model : Stylus C41/42 SX Board : C482MAIN-D Board

Rev. : D Sheet : 1 / 1

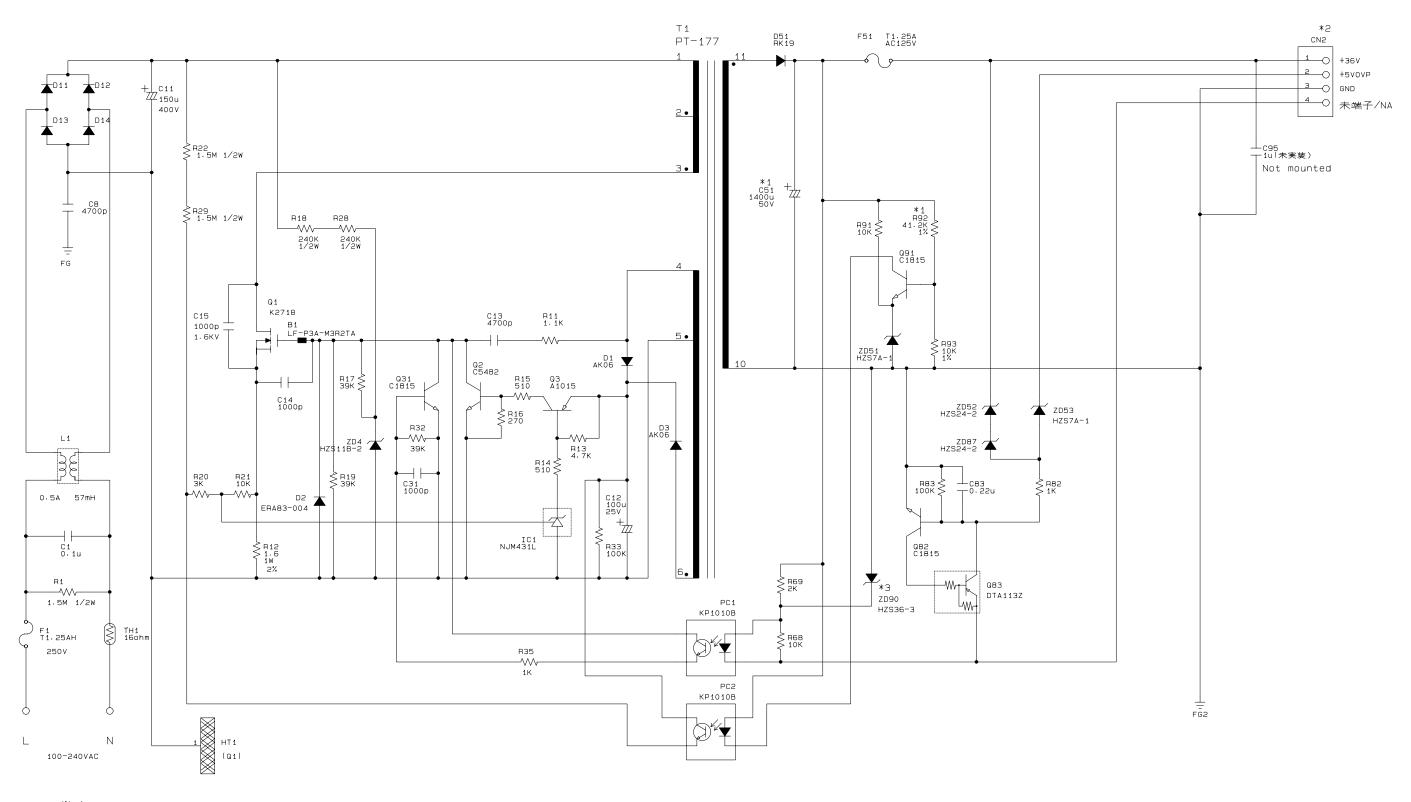

×	€ 1		
		C482	
	C51	μ 1400	
	R92	41.2K	

 X
 2: CN2

 C482
 C482

 Pin number
 3

 1pin
 +36V

 4pin
 未端子/NA

※ 3: For Location ZD90. In case C482: Non mounting.
In case C484: Mounting

Model : Stylus C41/42 SX/UX

Board : C482PSH Board

Rev. : C

Sheet : 1 / 1