
GPJN15-24/31.5 Indoor High Voltage Earthing Switch

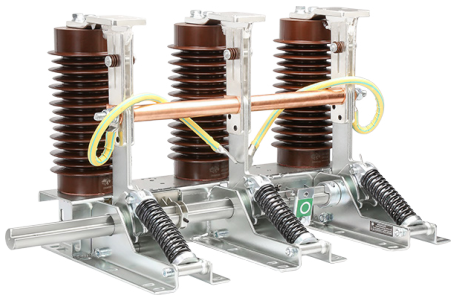

Products model and its meaning

GP J N 15 - 24 / 31.5 - □

- Phase distance (mm)
- Rated short-time withstand current (kA)
- Rated voltage (kV)
- Design No.
- Indoor
- Earthing switch
- Company feature code

General of earthing switch

GPJN15-24/31.5 type indoor high voltage earthing switch is the assembly type products, its performance meet GB1985-2004 High Voltage AC Disconnector and Earthing Switch and the requirements of standard IEC62271-102:2002. The products suit for power system with 24kV, 3 phase, AC, 50(60) Hz; It has capacity of short-circuit close to protect the electrical equipment from damage, Applicable for high voltage switchgear arrangement as the earthing protection when maintenance.

Standard working condition


1. Altitude sea level not exceeding 1000m;
2. Ambient air temperature: +45℃ ,-25℃ ;
3. Seismic intensity not exceeding 8 degree;
4. Related humidity daily average value not more than 95%, monthly average not more than 90%;
5. Pollution class: II


Special condition: Please specify when ordering.

Main technical data


Items		Unit	Data	
Rated voltage		kV	24	
Rated short-time withstand current		kA	31.5	
Rated short-circuit close current		kA	80	
Rated peak withstand current		kA	80	
Rated short-circuit duration		s	4	
Rated insulation level	1min Power frequency withstand voltage	kV	Phase to earth/ between phase	65
	Lighting impulse withstand voltage			125
Mechanical endurance		times	2000	

GPJN15-24/31.5 Earthing switch outline and installation dimension

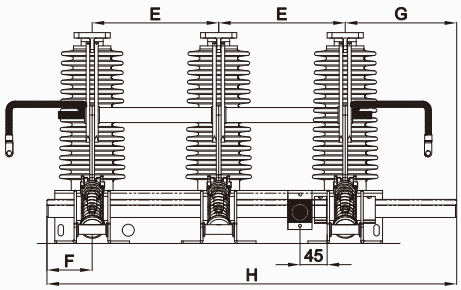




Fixed contact outline dimension



Holing dimension

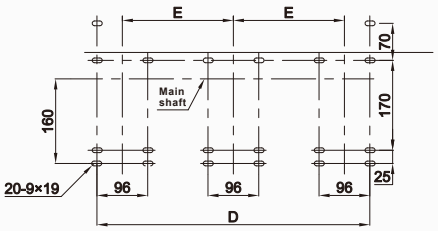

Products model	E	F	G	H	D
GPJN15-24/31.5-275	275	75	185	810	646
GPJN15-24/31.5-210	210	75	160	655	516

Ordering notice

1. When ordering earthing switch, please specify product model, right or left operation, phase distance, with or without live indicator device (specify the indicator model).
2. Flexible connect length need extend or not (Standard L=400mm).
3. If any special requirements, please contact with GreenPower to develop detailed specifications.