
GPJN15A-12/31.5 Indoor high voltage AC earthing switch

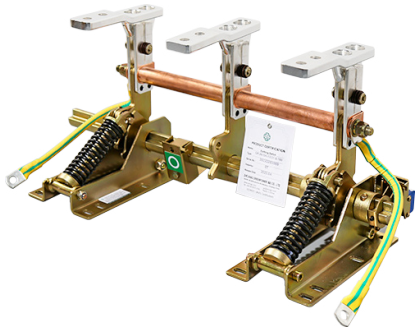

Description

GPJN15A-12/31.5 type indoor high voltage earthing switch is the assembly type new generation products, its performance meet GB1985-2004 High Voltage AC Disconnector and Earthing Switch and the requirements of standard IEC62271-102:2002. The products suit for power system with 3-12kV, 3 phase, AC, 50(60)Hz; It has capacity of short-circuit close to protect the electrical equipment from damage, Applicable for high voltage switchgear arrangement as the earthing protection when maintenance.


Working condition

1. Altitude sea level not exceeding 1000m;
2. Ambient air temperature: +45℃ ,-25℃ ;
3. Seismic intensity not exceeding 8 degree;
4. Related humidity daily average value not more than 95%, monthly average not more than 90%;
5. Pollution class: II


Main technical data


Items		Unit	Data	
Rated voltage		kV	12	
Rated short-time withstand current		kA	31.5	
Rated short circuit duration		s	4	
Rated short circuit close		kA	80	
Rated peak withstand current		kA	80	
Rated insulation level	Power frequency withstand voltage(1min)	kV	Pole to earth and between poles	42
	Lighting impulse voltage			75
Mechanical Life		time	3000	

Fixed contact outline dimension

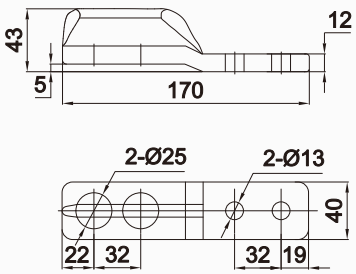

GPJN15A-12/31.5 Earthing switch layout and installation size

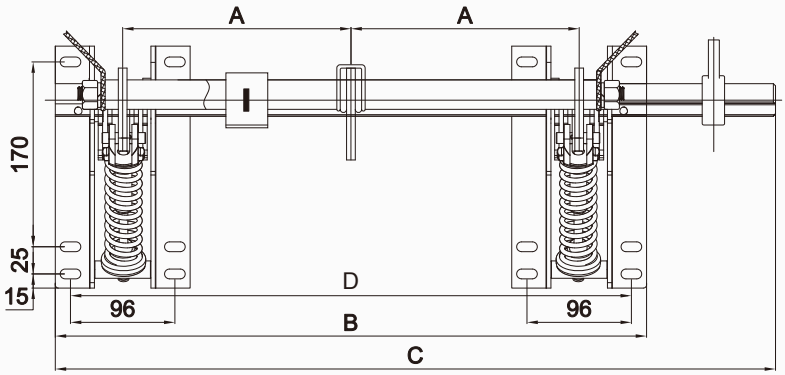



Model	A	B	C	D
GPJN15A-12/31.5-150	150	424	535	396
GPJN15A-12/31.5-165	165	454	565	426
GPJN15-12/31.5-180	180	484	571	456
GPJN15A-12/31.5-190	190	504	615	476
GPJN15A-12/31.5-200	200	524	635	496
GPJN15A-12/31.5-210	210	544	655	516
GPJN15A-12/31.5-230	230	584	695	556
GPJN15A-12/31.5-250	250	624	735	596
GPJN15A-12/31.5-275	275	674	785	646

Ordering notice

1. When ordering earthing switch, please specify product model, right or left operation, phase distance, with or without live indicator device (specify the indicator model).
2. Flexible connect length need extend or not.
3. If any special requirements, please contact with GreenPower to develop detailed specifications.