
GPJN15-40.5/31.5 Indoor high voltage earthing switch

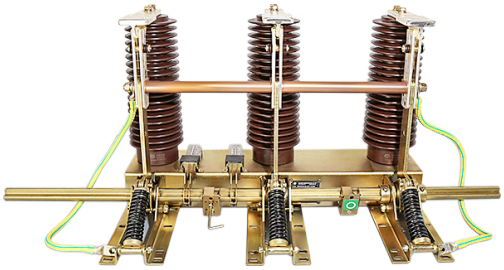

General of earthing switch


GPJN15-40.5/31.5 type indoor high voltage earthing switch is the assembly type products, its performance meet GB1985-2004 High Voltage AC Disconnector and Earthing Switch and the requirements of standard IEC62271-102:2002. The products suit for power system with 40.5kV, 3 phase, AC, 50(60) Hz; it can match with GPN1-40.5kV high voltage switchgear or other similar equipment. It is applicable for high voltage switchgear arrangement as the earthing protection when maintenance.


Standard working condition

1. Altitude sea level not exceeding 1000m;
2. Ambient air temperature: +45℃ ,-25℃ ;
3. Seismic intensity not exceeding 8 degree;
4. Related humidity daily average value not more than 95%, monthly average not more than 90%;
5. Pollution class: II


Special condition: Please specify when ordering.

GPJN15-40.5 Outline and installation dimension

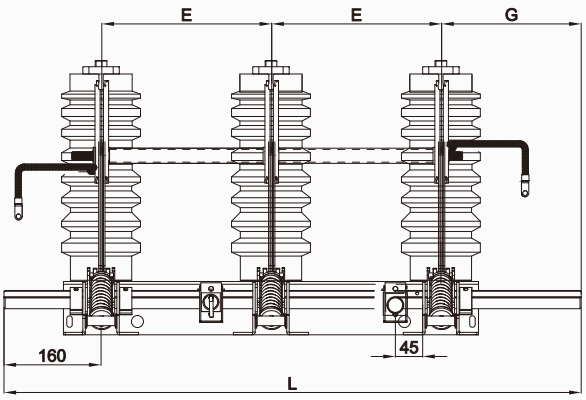


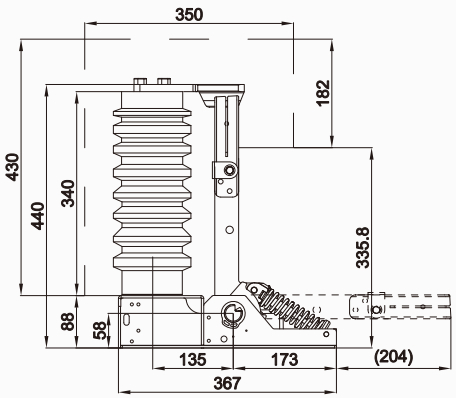

Holing dimension

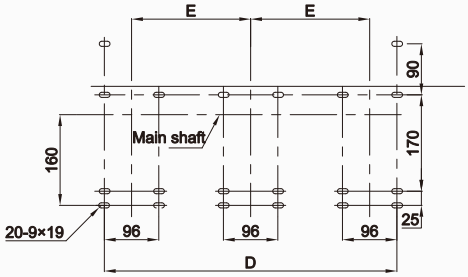

Fixed contact outline dimension



Products model	E	G	L	D
GPJN15-40.5/31.5-280	280	290	1010	656
GPJN15-40.5/31.5-300	300	340	1100	696
GPJN15-40.5/31.5-350	350	340	1200	796
GPJN15-40.5/31.5-360	360	320	1200	816
GPJN15-40.5/31.5-400	400	340	1300	896

Note: Phase distance less than 360mm need add insulating plate.

Ordering notice

1. Please specify products model, Rated voltage, Phase distance.
2. If need arrange bevel gear operation mechanism, please specify the operation way of right or left direction (Picture is right operation direction).
3. Flexible connection length need extend or not(Standard L=600mm).
4. With or without live indicator, please specify the model of it.
5. If any special requirements, please contact with GreenPower to develop detailed specifications.