

GPVN-24kV Indoor AC High Voltage Vacuum Circuit Breaker

Summary

GPVN-24kV indoor AC High Voltage vacuum circuit breaker is a type of holistic sealed High Voltage switchgear with small volume and compact structure. It applies to power system of rated voltage 24kV, three-phase AC 50/60Hz, and used to control and protect electric apparatus and circuit with frequent operations. This product conforms to IEC62271-100 & GB1984, JB3855 and DL403.



Ambient condition

Ambient temperature: -25°C ~ +45°C , daily average: ≤ 35°C

Altitude: 1000m; can up to 4500m for special ordering;

Relative humidity: daily average ≤ 95%, monthly average ≤ 90%;

Earthquake intensity: ≤ 8 degree;

Applicable occasions should be free from inflammables, explosives, corrosives and severe vibration.

Model and its meaning

GP VN - 24 □ / 630 - 25

Rated short-circuit breaking current (kA)

Rated current (A)

Blank: Insulating sleeve type; E: Embedded type

Rated voltage (kV)

Indoor vacuum circuit breaker

Company feature code


Product feature

- 1) Holistic structure
- 2) Sealed arc-extinguishing chamber
- 3) High quality vacuum arc-extinguishing
- 4) Sound mechanical feature
- 5) Various mounting methods

Technical specification

No.	Item	Unit	Data			
1	Rated voltage	kV	24			
2	Rated frequency	Hz	50/60			
3	Rated current	A	630, 1250, 1600, 2000, 2500, 3150, 4000			
4	Rated short-circuit breaking current	kA	20	25	31.5	31.5
5	Rated short-circuit making current	kA	50	63	80	80
6	Rated short-circuit withstand current(4s)	kA	20	25	31.5	31.5
7	Rated peak withstand current	kA	50	63	80	80
8	Rated out-of-step breaking current	kA			12.6	12.6
9	Rated breaking current of out-of-phase earth fault	kA	17.4	21.7	27.4	27.4
10	Rated breaking times of short-circuit breaking current	times	50			
11	Rated operating sequence		O-0.3s-CO-180s-CO			
12	Rated breaking current of single capacitor bank	A	630			
13	Rated breaking current of back-to-back capacitor bank	A	400			
14	1min. Power frequency withstand voltage	kV	50			
15	Lightning impulse withstand voltage	kV	125			
16	Mechanical life	times	20000			
17	Closing time	ms	75			
18	Opening time	ms	60			
19	Storage time under rated voltage	s	10			


■ Dimension of GPVN-24/630A~1250A(275/210)

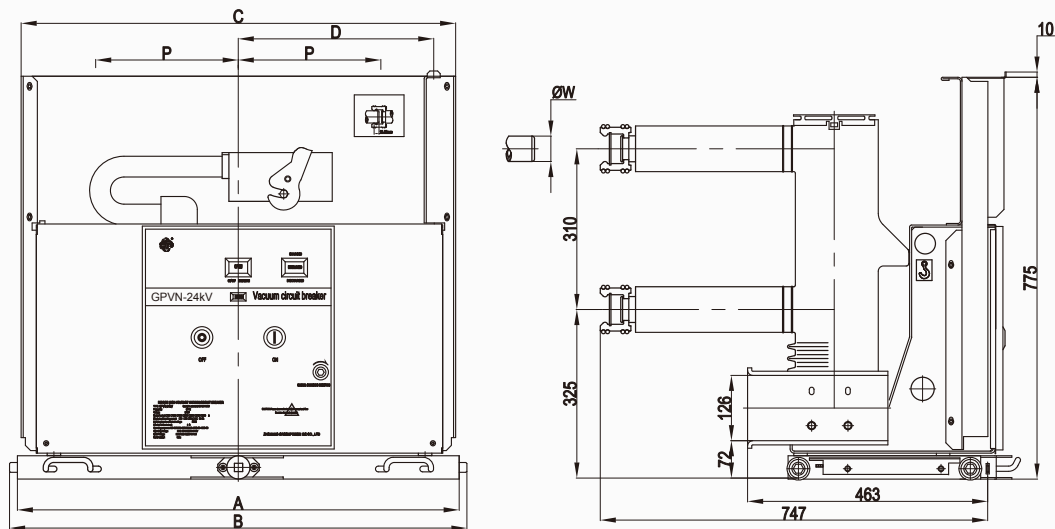

Rated current	P	A	B	C	D	W
630A	210	652	682	638	277	Φ 35
1250A	210	652	682	638	277	Φ 49
630A	275	852	882	838	377	Φ 35
1250A	275	852	882	838	377	Φ 49
1600A	275	852	882	838	377	Φ 55

Note:
Fixed type and motorized type breaker are available.



■ Dimension of GPVN-24/1600A~3150A(275)

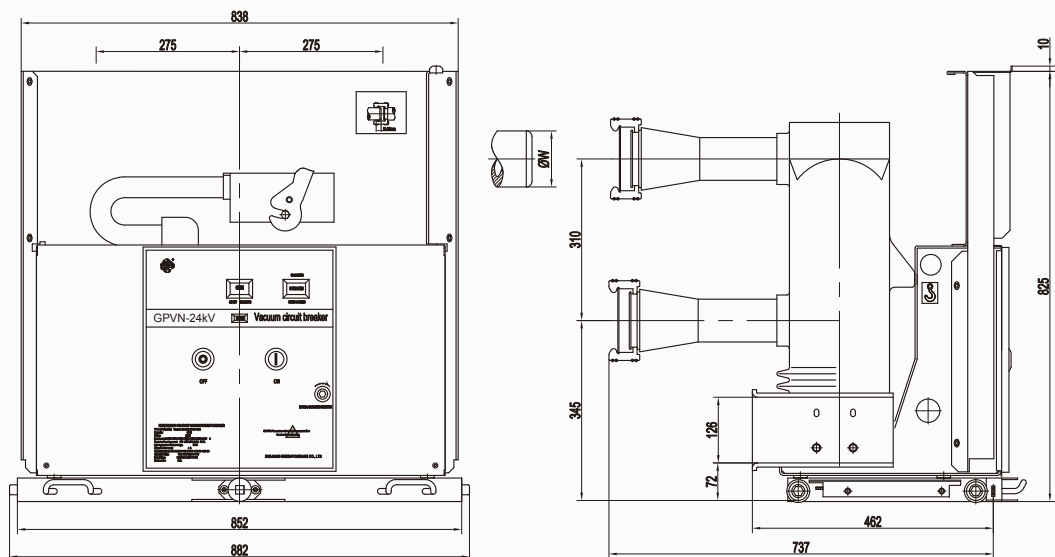

Rated current	P	W
1600A	275	Φ 79
2000A	275	Φ 79
2500A	275	Φ 109
3150A	275	Φ 109

Note:
1. Fixed type and motorized type breaker are available.
2. Here only VCB schematic for reference. For the PT truck, Bus truck, fuse truck, etc. Please consult with GP for more details.



■ Dimension of GPVN-24E/(630~1250A) breakers

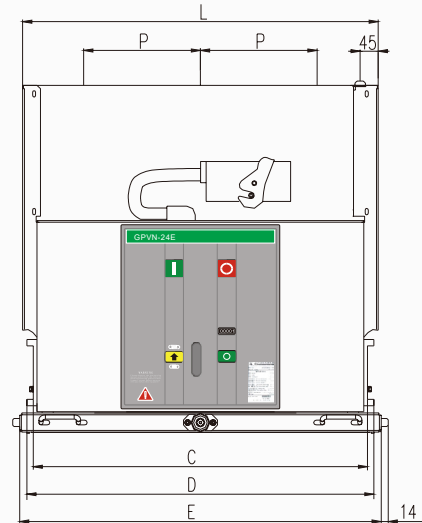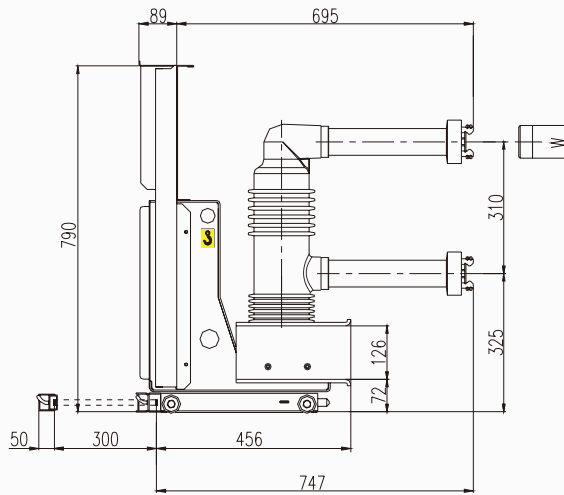

Rated current	P	C	D	E	L	W
630A	210	612	638	653	648	Φ 35
1250A	210	612	638	653	648	Φ 49
630	275	794	820	853	844	Φ 35
1250A	275	794	820	853	844	Φ 49

Note:
Fixed type and motorized type breaker are available.

i. Dimension of GPVN-24E/(1600~3150A) breakers

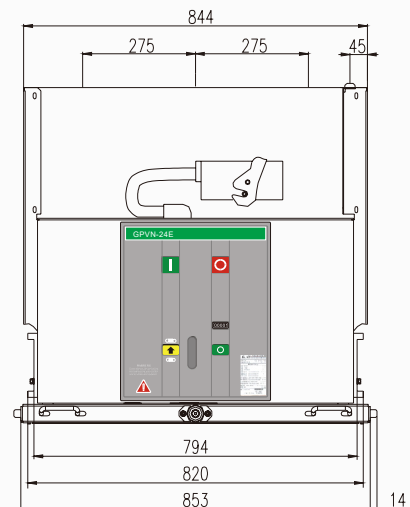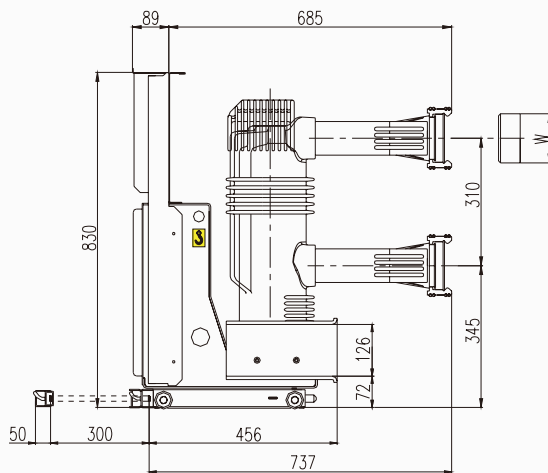

Rated current	W
1600A	Φ 79
2000A	Φ 79
2500A	Φ 109
3150A	Φ 109

Note:
1. Fixed type and motorized type breaker are available.
2. Here only VCB schematic for reference. For the PT truck, Bus truck, fuse truck, etc. Please consult with GP for more details.